

CampusAppWp8

Generated by Doxygen 1.8.4

Thu Aug 15 2013 15:25:17

Contents

1	Namespace Index	1
1.1	Packages	1
2	Hierarchical Index	3
2.1	Class Hierarchy	3
3	Class Index	7
3.1	Class List	7
4	Namespace Documentation	11
4.1	Package CampusAppWP8	11
4.2	Package CampusAppWP8.Feed	11
4.3	Package CampusAppWP8.Feed.Departments	12
4.4	Package CampusAppWP8.Feed.Events	12
4.5	Package CampusAppWP8.Feed.GeoApi	12
4.6	Package CampusAppWP8.Feed.Lecture	12
4.7	Package CampusAppWP8.Feed.Link	12
4.8	Package CampusAppWP8.Feed.Mensa	12
4.9	Package CampusAppWP8.Feed.News	13
4.10	Package CampusAppWP8.Feed.Openinghours	13
4.11	Package CampusAppWP8.Feed.StudentCouncil	13
4.12	Package CampusAppWP8.Model	13
4.13	Package CampusAppWP8.Model.Campusmap	14
4.14	Package CampusAppWP8.Model.Departments	14
4.15	Package CampusAppWP8.Model.events_news	14
4.16	Package CampusAppWP8.Model.GeoDb	14
4.17	Package CampusAppWP8.Model.Lecture	15
4.18	Package CampusAppWP8.Model.Link	15
4.19	Package CampusAppWP8.Model.Mensa	15
4.20	Package CampusAppWP8.Model.Openinghours	15
4.21	Package CampusAppWP8.Model.RSS	16
4.22	Package CampusAppWP8.Model.Setting	16

4.23	Package CampusAppWP8.Model.StudentCouncil	16
4.24	Package CampusAppWP8.Model.Utility	16
4.25	Package CampusAppWP8.Pages	17
4.26	Package CampusAppWP8.Pages.Campusmap	17
4.27	Package CampusAppWP8.Pages.Departments	17
4.28	Package CampusAppWP8.Pages.Events	18
4.29	Package CampusAppWP8.Pages.Lecture	18
4.30	Package CampusAppWP8.Pages.Links	18
4.31	Package CampusAppWP8.Pages.Mensa	18
4.32	Package CampusAppWP8.Pages.News	18
4.33	Package CampusAppWP8.Pages.Openinghours	19
4.34	Package CampusAppWP8.Pages.Setting	19
4.35	Package CampusAppWP8.Pages.StudentCouncil	19
4.36	Package CampusAppWP8.Pages.Webmail	19
4.37	Package CampusAppWP8.Resources	19
4.38	Package CampusAppWP8.Utility	19
4.39	Package CampusAppWP8.Utility.Lui	20
4.40	Package CampusAppWP8.Utility.Lui.Button	20
4.41	Package CampusAppWP8.Utility.Lui.MessageBoxes	20
5	Class Documentation	21
5.1	CampusAppWP8.App Class Reference	21
5.1.1	Constructor & Destructor Documentation	21
5.1.1.1	App	21
5.1.2	Member Function Documentation	22
5.1.2.1	LoadFromAppState< T >	22
5.1.2.2	LoadFromIsolatedStorage< T >	22
5.1.2.3	SaveToAppState< T >	22
5.1.2.4	SaveToIsolatedStorage< T >	22
5.1.3	Property Documentation	22
5.1.3.1	RootFrame	22
5.2	CampusAppWP8.Resources.AppResources Class Reference	22
5.2.1	Detailed Description	27
5.2.2	Property Documentation	27
5.2.2.1	Add	27
5.2.2.2	AppBarButtonText	27
5.2.2.3	AppBarMenuItemText	27
5.2.2.4	ApplicationTitle	27
5.2.2.5	Building	27
5.2.2.6	Campus_CBMain	27

5.2.2.7	Campus_CBNorth	27
5.2.2.8	Campus_CBSouth	27
5.2.2.9	Campus_SFBMain	27
5.2.2.10	CampusMapApp_Title	27
5.2.2.11	Culture	28
5.2.2.12	Degree_Bachelor	28
5.2.2.13	Degree_Diploma	28
5.2.2.14	Degree_Master	28
5.2.2.15	Delete	28
5.2.2.16	DeleteFailed	28
5.2.2.17	DeleteSucceeded	28
5.2.2.18	DepartmentApp_Title	28
5.2.2.19	EventApp_Title	28
5.2.2.20	Faculty	28
5.2.2.21	Favorites	28
5.2.2.22	Hint	28
5.2.2.23	HomeworkApp_Title	29
5.2.2.24	HomeworkApp_Title2	29
5.2.2.25	Info	29
5.2.2.26	LectureApp_Course	29
5.2.2.27	LectureApp_Courses	29
5.2.2.28	LectureApp_Degree	29
5.2.2.29	LectureApp_Department	29
5.2.2.30	LectureApp_DetailsHeader	29
5.2.2.31	LectureApp_LectureName	29
5.2.2.32	LectureApp_LectureTopic	29
5.2.2.33	LectureApp_Officer	29
5.2.2.34	LectureApp_Semester	29
5.2.2.35	LectureApp_Term	30
5.2.2.36	LectureApp_Title	30
5.2.2.37	LectureApp_Type	30
5.2.2.38	LinkApp_ClubLinks	30
5.2.2.39	LinkApp_CommonLinks	30
5.2.2.40	LinkApp_Title	30
5.2.2.41	ListPickerHeaderCampus	30
5.2.2.42	ListPickerHeaderCourse	30
5.2.2.43	ListPickerHeaderDegree	30
5.2.2.44	ListPickerHeaderRole	30
5.2.2.45	ListPickerHeaderSemester	30
5.2.2.46	MailApp_Title	30

5.2.2.47	MensaApp_Action	31
5.2.2.48	MensaApp_Bio	31
5.2.2.49	MensaApp_Dinner1	31
5.2.2.50	MensaApp_Dinner2	31
5.2.2.51	MensaApp_Dinner3	31
5.2.2.52	MensaApp_Dinner4	31
5.2.2.53	MensaApp_Dinner5	31
5.2.2.54	MensaApp_DinnerLabelW	31
5.2.2.55	MensaApp_NotToday	31
5.2.2.56	MensaApp_Soup	31
5.2.2.57	MensaApp_Title	31
5.2.2.58	MsgBox_ErrorCampusLoc	31
5.2.2.59	MsgBox_ErrorHeader	32
5.2.2.60	MsgBox_ErrorMainModelLoad	32
5.2.2.61	MsgBox_ErrorMainModelLoadFile	32
5.2.2.62	MsgBox_ErrorMainModelLoadWeb	32
5.2.2.63	MsgBox_GeoWatchOptInHeader	32
5.2.2.64	MsgBox_GeoWatchOptInText	32
5.2.2.65	NewsApp_Title	32
5.2.2.66	NewsHomeBtn	32
5.2.2.67	NewsLinkBtn	32
5.2.2.68	OpenHoursApp_Title	32
5.2.2.69	OpenHoursApp_Title2	32
5.2.2.70	OSAApp_Title	32
5.2.2.71	Professorship_chairs	33
5.2.2.72	ResourceFlowDirection	33
5.2.2.73	ResourceLanguage	33
5.2.2.74	ResourceManager	33
5.2.2.75	Room	33
5.2.2.76	SampleProperty	33
5.2.2.77	Setting_App	33
5.2.2.78	Setting_AppGeoWatch	33
5.2.2.79	Setting_AppAppBarTitle	33
5.2.2.80	Setting_RoleStaff	33
5.2.2.81	Setting_RoleStudent	33
5.2.2.82	Setting_User	33
5.2.2.83	Setting_UserCampus	34
5.2.2.84	Setting_UserCourse	34
5.2.2.85	Setting_UserDegree	34
5.2.2.86	Setting_UserProfilAppBarTitle	34

5.2.2.87	Setting_UserRole	34
5.2.2.88	Setting_UserSemester	34
5.2.2.89	Time_Day_Friday	34
5.2.2.90	Time_Day_Monday	34
5.2.2.91	Time_Day_Saturday	34
5.2.2.92	Time_Day_Sunday	34
5.2.2.93	Time_Day_Thursday	34
5.2.2.94	Time_Day_Tuesday	34
5.2.2.95	Time_Day_Wednesday	35
5.2.2.96	TimeTableApp_Title	35
5.2.2.97	UpdateBtn	35
5.2.2.98	WelcomeString	35
5.3	CampusAppWP8.Pages.Setting.AppSettingPage Class Reference	35
5.3.1	Detailed Description	35
5.3.2	Constructor & Destructor Documentation	36
5.3.2.1	AppSettingPage	36
5.3.3	Member Function Documentation	36
5.3.3.1	OnNavigatedFrom	36
5.4	CampusAppWP8.Model.Setting.AppSettings Class Reference	36
5.4.1	Detailed Description	36
5.4.2	Property Documentation	36
5.4.2.1	GeoWatchEnable	36
5.4.2.2	InitApp	36
5.5	CampusAppWP8.Model.Utility.CampusListPickerItemListModel Class Reference	37
5.5.1	Detailed Description	37
5.5.2	Constructor & Destructor Documentation	37
5.5.2.1	CampusListPickerItemListModel	37
5.5.3	Member Function Documentation	37
5.5.3.1	LoadList	37
5.6	CampusAppWP8.Pages.Campusmap.CampusMapPage Class Reference	37
5.6.1	Detailed Description	38
5.6.2	Constructor & Destructor Documentation	38
5.6.2.1	CampusMapPage	38
5.6.3	Member Function Documentation	38
5.6.3.1	OnNavigatedTo	38
5.7	CampusAppWP8.Feed.GeoApi.CampusSpsApi Class Reference	38
5.7.1	Detailed Description	39
5.7.2	Constructor & Destructor Documentation	39
5.7.2.1	CampusSpsApi	39
5.7.3	Member Function Documentation	39

5.7.3.1	GetCampus	39
5.7.3.2	SetupCampusRequest	39
5.7.3.3	SetupCurrentCampusRequest	40
5.8	CampusAppWP8.Model.Campusmap.CBMainMapModel Class Reference	40
5.8.1	Detailed Description	40
5.8.2	Constructor & Destructor Documentation	40
5.8.2.1	CBMainMapModel	40
5.9	CampusAppWP8.Model.Departments.ChairModel Class Reference	40
5.9.1	Detailed Description	41
5.9.2	Constructor & Destructor Documentation	41
5.9.2.1	ChairModel	41
5.9.2.2	ChairModel	41
5.9.3	Property Documentation	41
5.9.3.1	Name	41
5.9.3.2	NameDE	41
5.9.3.3	NameEN	41
5.9.3.4	Url	41
5.10	CampusAppWP8.Model.Utility.CleanUrlParamModel Class Reference	42
5.10.1	Detailed Description	42
5.10.2	Constructor & Destructor Documentation	42
5.10.2.1	CleanUrlParamModel	42
5.10.2.2	CleanUrlParamModel	42
5.10.3	Member Function Documentation	43
5.10.3.1	ToString	43
5.10.4	Property Documentation	43
5.10.4.1	ParamToken	43
5.11	CampusAppWP8.Feed.Link.ClubLinkFeed Class Reference	43
5.11.1	Detailed Description	43
5.11.2	Constructor & Destructor Documentation	44
5.11.2.1	ClubLinkFeed	44
5.12	CampusAppWP8.Feed.Link.CommonLinkFeed Class Reference	44
5.12.1	Detailed Description	44
5.12.2	Constructor & Destructor Documentation	44
5.12.2.1	CommonLinkFeed	44
5.13	CampusAppWP8.Const Class Reference	44
5.13.1	Detailed Description	45
5.13.2	Property Documentation	45
5.13.2.1	Constants	45
5.14	CampusAppWP8.Resources.Constants Class Reference	45
5.14.1	Detailed Description	49

5.14.2	Property Documentation	49
5.14.2.1	AppSetting_GeoWatchEnable	49
5.14.2.2	AppSetting_InitApp	49
5.14.2.3	Culture	49
5.14.2.4	FileDepartment_Favorite_Name	49
5.14.2.5	FileDepartment_Name	50
5.14.2.6	FileEvents_Name	50
5.14.2.7	FileLink_ClubLinks	50
5.14.2.8	FileLink_CommonLinks	50
5.14.2.9	FileMensa_Shedule	50
5.14.2.10	FileMensa_Shedule_CBMain	50
5.14.2.11	FileMensa_Shedule_CBNorth	50
5.14.2.12	FileMensa_Shedule_CBSouth	50
5.14.2.13	FileMensa_Shedule_SBFMain	50
5.14.2.14	FileNews_Name	50
5.14.2.15	FileOpeningHours_OpeningHours	50
5.14.2.16	FileProfil_User	50
5.14.2.17	FileStudentCouncil_StudentCouncils	51
5.14.2.18	GeoWatch_CurrentPosition_Lat	51
5.14.2.19	GeoWatch_CurrentPosition_Long	51
5.14.2.20	GeoWatch_CurrentPosition_Time	51
5.14.2.21	IsolatedStorage_DepartmentFavoriteModel	51
5.14.2.22	IsolatedStorage_DepartmentModel	51
5.14.2.23	IsolatedStorage_EventRSSModel	51
5.14.2.24	IsolatedStorage_LectureModel	51
5.14.2.25	IsolatedStorage_LecturePageModel	51
5.14.2.26	IsolatedStorage_NewsRSSModel	51
5.14.2.27	IsolatedStorage_OpeninghoursModel	51
5.14.2.28	LectureXmlValidRootName	51
5.14.2.29	MeallconName_Cow	52
5.14.2.30	MeallconName_CowPig	52
5.14.2.31	MeallconName_Fish	52
5.14.2.32	MeallconName_Fowl	52
5.14.2.33	MeallconName_Free	52
5.14.2.34	MeallconName_Lamb	52
5.14.2.35	MeallconName_Pig	52
5.14.2.36	MeallconName_Vegetarian	52
5.14.2.37	MeallconName_Wild	52
5.14.2.38	ParamGetLecture_Course	52
5.14.2.39	ParamGetLecture_Degree	52

5.14.2.40 ParamGetLecture_From	52
5.14.2.41 ParamGetLecture_Semester	53
5.14.2.42 ParamGetLecture_To	53
5.14.2.43 ParamModelLecture_ActivityId	53
5.14.2.44 ParamModelLecture_ModulNumber	53
5.14.2.45 ParamPivotIndex	53
5.14.2.46 ParamUrl	53
5.14.2.47 PathCampusmap_Campusmap	53
5.14.2.48 PathDepartment_DepartmentFavoritePage	53
5.14.2.49 PathDepartment_DepartmentIndexPage	53
5.14.2.50 PathDepartment_DepartmentInfoPage	53
5.14.2.51 PathDepartment_DepartmentPage	53
5.14.2.52 PathEvent_EventPage	53
5.14.2.53 PathEvents_EventsIndexPage	54
5.14.2.54 PathLecture_LecturePage	54
5.14.2.55 PathLecture_ModulWebPage	54
5.14.2.56 PathLecture_ResultDetailPage	54
5.14.2.57 PathLecture_ResultPage	54
5.14.2.58 PathLinks_LinkPage	54
5.14.2.59 PathMail_WebMailPage	54
5.14.2.60 PathMensa_MensaPage	54
5.14.2.61 PathNews_NewsIndexPage	54
5.14.2.62 PathNews_NewsPage	54
5.14.2.63 PathOpeninghours_OpeninghoursPage	54
5.14.2.64 PathSetting_App	54
5.14.2.65 PathSetting_User	55
5.14.2.66 PathStudentCouncil_StudentCouncilPage	55
5.14.2.67 ResourceManager	55
5.14.2.68 Setting_DefaultCourseNumber	55
5.14.2.69 Setting_DefaultSemester	55
5.14.2.70 SpsApi_CampusDomain	55
5.14.2.71 SpsApi_DomainParaKey	55
5.14.2.72 SpsApi_LatitudeParaKey	55
5.14.2.73 SpsApi_LongitudeParaKey	55
5.14.2.74 ToggleContent	55
5.14.2.75 UriDepartment_Addr	55
5.14.2.76 UriEvents_Addr	55
5.14.2.77 UriLecture_ApiBaseAddr	56
5.14.2.78 UriLecture_ModulBaseAddr	56
5.14.2.79 UriLink_ClubLinks	56

5.14.2.80	UrlLink_CommonLinks	56
5.14.2.81	UrlMensa_Week	56
5.14.2.82	UrlMensa_Week_CBMain	56
5.14.2.83	UrlMensa_Week_CBNorth	56
5.14.2.84	UrlMensa_Week_CBSouth	56
5.14.2.85	UrlMensa_Week_SBFMain	56
5.14.2.86	UrlNews_Addr	56
5.14.2.87	UrlOpeningHours_OpeningHours	57
5.14.2.88	UrlSpsService	57
5.14.2.89	UrlStudentCouncil_StudentCouncils	57
5.14.2.90	UrlWebMail_Addr	57
5.14.2.91	UserSettings_Course	57
5.14.2.92	UserSettings_DefaultCampus	57
5.14.2.93	UserSettings_Degree	57
5.14.2.94	UserSettings_Role	57
5.14.2.95	UserSettings_Semester	57
5.14.2.96	Valid_FirstSemseter	57
5.14.2.97	Valid_LastSemseter	57
5.14.2.98	Valid_MaxCourseNumber	57
5.14.2.99	XMLRootElementName	58
5.15	CampusAppWP8.Model.Utility.CourseListPickerItemListModel Class Reference	58
5.15.1	Detailed Description	58
5.15.2	Constructor & Destructor Documentation	58
5.15.2.1	CourseListPickerItemListModel	58
5.15.3	Member Function Documentation	58
5.15.3.1	LoadList	58
5.16	CampusAppWP8.Model.Utility.DegreeListPickerItemListModel Class Reference	59
5.16.1	Detailed Description	59
5.16.2	Constructor & Destructor Documentation	59
5.16.2.1	DegreeListPickerItemListModel	59
5.16.3	Member Function Documentation	59
5.16.3.1	LoadList	59
5.17	CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed Class Reference	60
5.17.1	Detailed Description	60
5.17.2	Constructor & Destructor Documentation	60
5.17.2.1	DepartmentFavoriteFeed	60
5.18	CampusAppWP8.Pages.Departments.DepartmentFavoritePage Class Reference	60
5.18.1	Detailed Description	61
5.18.2	Constructor & Destructor Documentation	61
5.18.2.1	DepartmentFavoritePage	61

5.18.3	Member Function Documentation	61
5.18.3.1	OnNavigatedFrom	61
5.18.3.2	OnNavigatedTo	61
5.19	CampusAppWP8.Feed.Departments.DepartmentFeed Class Reference	61
5.19.1	Detailed Description	62
5.19.2	Constructor & Destructor Documentation	62
5.19.2.1	DepartmentFeed	62
5.20	CampusAppWP8.Pages.Departments.DepartmentIndexPage Class Reference	62
5.20.1	Detailed Description	63
5.20.2	Constructor & Destructor Documentation	63
5.20.2.1	DepartmentIndexPage	63
5.20.3	Member Function Documentation	63
5.20.3.1	GetFavoriteFeed	63
5.20.3.2	GetFeed	63
5.20.3.3	OnNavigatedFrom	63
5.20.3.4	OnNavigatedTo	63
5.20.4	Property Documentation	64
5.20.4.1	FavoriteFeed	64
5.20.4.2	Feed	64
5.21	CampusAppWP8.Pages.Departments.DepartmentInfoPage Class Reference	64
5.21.1	Detailed Description	64
5.21.2	Constructor & Destructor Documentation	64
5.21.2.1	DepartmentInfoPage	64
5.21.3	Member Function Documentation	65
5.21.3.1	OnNavigatedTo	65
5.22	CampusAppWP8.Model.Departments.DepartmentModel Class Reference	65
5.22.1	Detailed Description	65
5.22.2	Constructor & Destructor Documentation	65
5.22.2.1	DepartmentModel	65
5.22.3	Member Function Documentation	65
5.22.3.1	HasChanged	65
5.22.4	Property Documentation	66
5.22.4.1	CreateTime	66
5.22.4.2	Faculties	66
5.23	CampusAppWP8.Pages.Departments.DepartmentPage Class Reference	66
5.23.1	Detailed Description	66
5.23.2	Constructor & Destructor Documentation	66
5.23.2.1	DepartmentPage	66
5.23.3	Member Function Documentation	67
5.23.3.1	OnNavigatedFrom	67

5.23.3.2	OnNavigatedTo	67
5.24	CampusAppWP8.Utility.Lui.Button.EmailButton Class Reference	67
5.24.1	Detailed Description	68
5.24.2	Constructor & Destructor Documentation	68
5.24.2.1	EmailButton	68
5.24.3	Member Function Documentation	68
5.24.3.1	OnClick	68
5.24.4	Member Data Documentation	68
5.24.4.1	EmailProperty	68
5.24.5	Property Documentation	68
5.24.5.1	EmailAddress	68
5.25	CampusAppWP8.Feed.Events.EventFeed Class Reference	68
5.25.1	Detailed Description	69
5.25.2	Constructor & Destructor Documentation	69
5.25.2.1	EventFeed	69
5.26	CampusAppWP8.Pages.Events.EventIndexPage Class Reference	69
5.26.1	Detailed Description	70
5.26.2	Constructor & Destructor Documentation	70
5.26.2.1	EventIndexPage	70
5.26.3	Member Function Documentation	70
5.26.3.1	GetEventFeed	70
5.26.3.2	OnNavigatedTo	70
5.26.4	Property Documentation	70
5.26.4.1	Feed	70
5.27	CampusAppWP8.Pages.Events.EventPage Class Reference	70
5.27.1	Detailed Description	71
5.27.2	Constructor & Destructor Documentation	71
5.27.2.1	EventPage	71
5.27.3	Member Function Documentation	71
5.27.3.1	OnNavigatedFrom	71
5.27.3.2	OnNavigatedTo	71
5.28	CampusAppWP8.Model.Departments.FacultyModel Class Reference	72
5.28.1	Detailed Description	72
5.28.2	Constructor & Destructor Documentation	72
5.28.2.1	FacultyModel	72
5.28.2.2	FacultyModel	72
5.28.3	Member Function Documentation	73
5.28.3.1	AddChair	73
5.28.3.2	AddChair	73
5.28.3.3	GetChairModel	73

5.28.3.4	HasChanged	73
5.28.3.5	RemoveChair	74
5.28.4	Property Documentation	75
5.28.4.1	Chairs	75
5.28.4.2	Id	75
5.28.4.3	Name	75
5.29	CampusAppWP8.Utility.File Class Reference	75
5.29.1	Detailed Description	76
5.29.2	Member Enumeration Documentation	76
5.29.2.1	IOTypeRead	76
5.29.2.2	IOTypeWrite	76
5.29.3	Constructor & Destructor Documentation	76
5.29.3.1	File	76
5.29.4	Member Function Documentation	76
5.29.4.1	Exist	76
5.29.4.2	GetFileInfo	77
5.29.4.3	ReadFile	77
5.29.4.4	WriteCallbackFunc	77
5.29.4.5	WriteFile	77
5.30	CampusAppWP8.Utility.Lui.Button.GoToMapButton Class Reference	77
5.30.1	Detailed Description	78
5.30.2	Constructor & Destructor Documentation	78
5.30.2.1	GoToMapButton	78
5.30.3	Member Function Documentation	78
5.30.3.1	OnClick	78
5.30.4	Member Data Documentation	78
5.30.4.1	SearchTermProperty	78
5.30.5	Property Documentation	78
5.30.5.1	SearchTerm	78
5.31	CampusAppWP8.Utility.HttpRequest Class Reference	79
5.31.1	Detailed Description	79
5.31.2	Constructor & Destructor Documentation	79
5.31.2.1	HttpRequest	79
5.31.2.2	HttpRequest	79
5.31.3	Member Function Documentation	80
5.31.3.1	CreateGetUrl	80
5.31.3.2	HttpConnect	80
5.31.3.3	HttpDelete	80
5.31.3.4	HttpGet	80
5.31.3.5	HttpHead	80

5.31.3.6	HttpOptions	81
5.31.3.7	HttpPatch	81
5.31.3.8	HttpPost	81
5.31.3.9	HttpPut	81
5.31.3.10	HttpTrace	81
5.32	CampusAppWP8.Resources.Icons Class Reference	82
5.32.1	Detailed Description	83
5.32.2	Property Documentation	83
5.32.2.1	Add	83
5.32.2.2	Campus	83
5.32.2.3	Cow	83
5.32.2.4	CowPig	83
5.32.2.5	Delete	83
5.32.2.6	Departments	83
5.32.2.7	Favorite	84
5.32.2.8	Fish	84
5.32.2.9	Fowl	84
5.32.2.10	Free	84
5.32.2.11	Homework	84
5.32.2.12	Info	84
5.32.2.13	Lamb	84
5.32.2.14	Lectures	84
5.32.2.15	Link	84
5.32.2.16	Mensa	84
5.32.2.17	News	84
5.32.2.18	Openhours	84
5.32.2.19	Phone	85
5.32.2.20	Pig	85
5.32.2.21	Schedule	85
5.32.2.22	Search	85
5.32.2.23	StudentCouncil	85
5.32.2.24	Update	85
5.32.2.25	Vegetarian	85
5.32.2.26	WebMail	85
5.32.2.27	Wild	85
5.33	CampusAppWP8.Model.Lecture.LectureActivity Class Reference	85
5.33.1	Detailed Description	86
5.33.2	Constructor & Destructor Documentation	86
5.33.2.1	LectureActivity	86
5.33.3	Member Function Documentation	86

5.33.3.1	CreateCourseString	86
5.33.3.2	CreateLectureString	87
5.33.4	Property Documentation	87
5.33.4.1	Course	87
5.33.4.2	CourseString	87
5.33.4.3	Dates	87
5.33.4.4	Department	87
5.33.4.5	Id	87
5.33.4.6	Lecturer	87
5.33.4.7	LecturerString	87
5.33.4.8	Modul	87
5.33.4.9	Semester	87
5.33.4.10	SWS	87
5.33.4.11	Title	88
5.33.4.12	Topic	88
5.33.4.13	Type	88
5.34	CampusAppWP8.Feed.Lecture.LectureApi Class Reference	88
5.34.1	Detailed Description	88
5.34.2	Constructor & Destructor Documentation	88
5.34.2.1	LectureApi	88
5.35	CampusAppWP8.Model.Lecture.LectureCourse Class Reference	88
5.35.1	Detailed Description	89
5.35.2	Constructor & Destructor Documentation	89
5.35.2.1	LectureCourse	89
5.35.3	Property Documentation	89
5.35.3.1	Title	89
5.36	CampusAppWP8.Model.Lecture.LectureDate Class Reference	89
5.36.1	Detailed Description	90
5.36.2	Constructor & Destructor Documentation	90
5.36.2.1	LectureDate	90
5.36.3	Property Documentation	90
5.36.3.1	EndDate	90
5.36.3.2	From	90
5.36.3.3	Interval	90
5.36.3.4	Room	90
5.36.3.5	StartDate	90
5.36.3.6	To	90
5.36.3.7	WeekDay	90
5.37	CampusAppWP8.Model.Lecture.LectureLecturer Class Reference	91
5.37.1	Detailed Description	91

5.37.2	Constructor & Destructor Documentation	91
5.37.2.1	LectureLecturer	91
5.37.3	Member Function Documentation	91
5.37.3.1	ToString	91
5.37.4	Property Documentation	91
5.37.4.1	FirstName	91
5.37.4.2	LastName	91
5.37.4.3	Responsibility	92
5.37.4.4	Title	92
5.38	CampusAppWP8.Model.Lecture.LectureList Class Reference	92
5.38.1	Detailed Description	92
5.38.2	Constructor & Destructor Documentation	92
5.38.2.1	LectureList	92
5.38.3	Member Function Documentation	92
5.38.3.1	GetActivity	92
5.38.4	Property Documentation	93
5.38.4.1	Activities	93
5.39	CampusAppWP8.Model.Lecture.LectureModule Class Reference	93
5.39.1	Detailed Description	93
5.39.2	Constructor & Destructor Documentation	93
5.39.2.1	LectureModule	93
5.39.3	Property Documentation	93
5.39.3.1	Number	93
5.39.3.2	Title	94
5.39.3.3	Url	94
5.40	CampusAppWP8.Pages.Lecture.LecturePage Class Reference	94
5.40.1	Detailed Description	94
5.40.2	Constructor & Destructor Documentation	94
5.40.2.1	LecturePage	94
5.40.3	Member Function Documentation	94
5.40.3.1	OnNavigatedFrom	94
5.41	CampusAppWP8.Model.Lecture.LecturePageModel Class Reference	95
5.41.1	Detailed Description	96
5.41.2	Constructor & Destructor Documentation	96
5.41.2.1	LecturePageModel	96
5.41.3	Member Function Documentation	96
5.41.3.1	LoadFromNumberList	96
5.41.3.2	LoadLists	96
5.41.3.3	LoadToNumberList	96
5.41.4	Member Data Documentation	96

5.41.4.1	selectCourseIndex	96
5.41.4.2	selectDegreeIndex	96
5.41.4.3	selectFromIndex	96
5.41.4.4	selectSemesterIndex	97
5.41.4.5	selectToIndex	97
5.41.5	Property Documentation	97
5.41.5.1	CourseList	97
5.41.5.2	DegreeList	97
5.41.5.3	FromNumberList	97
5.41.5.4	SelectCourseIndex	97
5.41.5.5	SelectDegreeIndex	97
5.41.5.6	SelectFromIndex	97
5.41.5.7	SelectSemesterIndex	97
5.41.5.8	SelectToIndex	97
5.41.5.9	SemesterList	97
5.41.5.10	ToNumberList	98
5.42	CampusAppWP8.Utility.Lui.Button.LinkButton Class Reference	98
5.42.1	Detailed Description	98
5.42.2	Constructor & Destructor Documentation	98
5.42.2.1	LinkButton	98
5.42.3	Member Function Documentation	99
5.42.3.1	OnClick	99
5.42.4	Member Data Documentation	99
5.42.4.1	LinkProperty	99
5.42.5	Property Documentation	99
5.42.5.1	Url	99
5.43	CampusAppWP8.Model.Link.LinkListModel Class Reference	99
5.43.1	Detailed Description	99
5.43.2	Constructor & Destructor Documentation	99
5.43.2.1	LinkListModel	99
5.43.3	Property Documentation	100
5.43.3.1	CreateTime	100
5.43.3.2	Links	100
5.44	CampusAppWP8.Model.Link.LinkModel Class Reference	100
5.44.1	Detailed Description	100
5.44.2	Constructor & Destructor Documentation	100
5.44.2.1	LinkModel	100
5.44.3	Property Documentation	101
5.44.3.1	Link	101
5.44.3.2	Link_DE	101

5.44.3.3	Link_EN	101
5.44.3.4	Title	101
5.44.3.5	Title_DE	101
5.44.3.6	Title_EN	101
5.45	CampusAppWP8.Pages.Links.LinkPage Class Reference	101
5.45.1	Detailed Description	102
5.45.2	Constructor & Destructor Documentation	102
5.45.2.1	LinkPage	102
5.45.3	Member Function Documentation	102
5.45.3.1	OnNavigatedFrom	102
5.45.3.2	OnNavigatedTo	102
5.46	CampusAppWP8.Model.Utility.ListPickerItemListModel Class Reference	102
5.46.1	Detailed Description	103
5.46.2	Constructor & Destructor Documentation	103
5.46.2.1	ListPickerItemListModel	103
5.46.3	Member Function Documentation	103
5.46.3.1	AddItem	103
5.46.3.2	AddItem	103
5.46.3.3	GetIndexOrDefault	104
5.46.3.4	LoadList	104
5.46.3.5	RemoveItem	104
5.46.3.6	RemoveItem	104
5.46.4	Property Documentation	104
5.46.4.1	List	104
5.47	CampusAppWP8.Model.Utility.ListPickerItemModel Class Reference	105
5.47.1	Detailed Description	105
5.47.2	Constructor & Destructor Documentation	105
5.47.2.1	ListPickerItemModel	105
5.47.2.2	ListPickerItemModel	105
5.47.3	Property Documentation	105
5.47.3.1	Text	105
5.47.3.2	Value	106
5.48	CampusAppWP8.LocalizedStrings Class Reference	106
5.48.1	Detailed Description	106
5.49	CampusAppWP8.Utility.Logger Class Reference	106
5.49.1	Detailed Description	106
5.49.2	Member Function Documentation	106
5.49.2.1	LogException	106
5.49.2.2	LogMsg	107
5.50	CampusAppWP8.MainModel< T > Class Template Reference	107

5.50.1	Detailed Description	109
5.50.2	Member Enumeration Documentation	109
5.50.2.1	ModelType	109
5.50.3	Constructor & Destructor Documentation	109
5.50.3.1	MainModel	109
5.50.3.2	MainModel	109
5.50.4	Member Function Documentation	110
5.50.4.1	ClearUriParams	110
5.50.4.2	DeserializeModel	110
5.50.4.3	Dispose	110
5.50.4.4	ForceReadFile	110
5.50.4.5	ForceWebUpdate	110
5.50.4.6	GetModel	110
5.50.4.7	GetModelType	110
5.50.4.8	IsFile	111
5.50.4.9	IsFileUpToDate	111
5.50.4.10	IsHttpApi	111
5.50.4.11	IsModelUpToDate	111
5.50.4.12	LoadData	111
5.50.4.13	OnFailed	111
5.50.4.14	OnLoaded	111
5.50.4.15	OnLoading	112
5.50.4.16	OnSaved	112
5.50.4.17	OnSaving	112
5.50.4.18	SaveData	112
5.50.4.19	SerializeModel	112
5.50.4.20	SetUriParams	112
5.50.5	Property Documentation	112
5.50.5.1	Model	112
5.50.6	Event Documentation	112
5.50.6.1	isFileUpToDateOnLoad	112
5.50.6.2	isFileUpToDateOnSave	112
5.50.6.3	isModelUpToDateOnLoad	113
5.50.6.4	isModelUpToDateOnSave	113
5.50.6.5	onFailed	113
5.50.6.6	onFailedFile	113
5.50.6.7	onFailedSave	113
5.50.6.8	onFailedWeb	113
5.50.6.9	onLoaded	113
5.50.6.10	onLoading	113

5.50.6.11	onSaved	113
5.50.6.12	onSaving	113
5.51	CampusAppWP8.Model.Campusmap.MapModel Class Reference	113
5.51.1	Detailed Description	115
5.51.2	Constructor & Destructor Documentation	115
5.51.2.1	MapModel	115
5.51.3	Member Function Documentation	115
5.51.3.1	AddPin	115
5.51.3.2	AddPin	115
5.51.3.3	AddPinFromRefPoint	115
5.51.3.4	AddPinFromRefPoint	116
5.51.3.5	ConverToMapPoint	117
5.51.3.6	ConverToMapPoint	117
5.51.3.7	ConverToPixelPoint	117
5.51.3.8	ConverToPixelPoint	117
5.51.3.9	GetScrollPoint	118
5.51.3.10	GetScrollPoint	118
5.51.4	Property Documentation	118
5.51.4.1	GeoOffsetX	118
5.51.4.2	GeoOffsetY	118
5.51.4.3	ImageHeight	118
5.51.4.4	ImageSource	118
5.51.4.5	ImageWidth	118
5.51.4.6	MapImageOffsetX	119
5.51.4.7	MapImageOffsetY	119
5.51.4.8	RefPoint	119
5.51.4.9	ScaleX	119
5.51.4.10	ScaleY	119
5.52	CampusAppWP8.Model.Campusmap.MapPinModel Class Reference	119
5.52.1	Detailed Description	120
5.52.2	Constructor & Destructor Documentation	120
5.52.2.1	MapPinModel	120
5.52.3	Property Documentation	120
5.52.3.1	ImageHeight	120
5.52.3.2	ImageSource	120
5.52.3.3	ImageWidth	120
5.52.3.4	PinImageOffsetX	120
5.52.3.5	PinImageOffsetY	120
5.52.3.6	Position	120
5.53	CampusAppWP8.Model.Mensa.MealModel Class Reference	120

5.53.1	Detailed Description	121
5.53.2	Property Documentation	121
5.53.2.1	IconName	121
5.53.2.2	IconUrl	121
5.53.2.3	MealDesc	121
5.53.2.4	MealId	121
5.53.2.5	MealName	121
5.54	CampusAppWP8.Feed.Mensa.MensaFeed Class Reference	121
5.54.1	Detailed Description	122
5.54.2	Constructor & Destructor Documentation	122
5.54.2.1	MensaFeed	122
5.54.3	Member Function Documentation	122
5.54.3.1	CreateCampusMensaFeed	122
5.55	CampusAppWP8.Feed.Mensa.MensaFeedCBMain Class Reference	122
5.55.1	Detailed Description	123
5.55.2	Constructor & Destructor Documentation	123
5.55.2.1	MensaFeedCBMain	123
5.56	CampusAppWP8.Feed.Mensa.MensaFeedCBNorth Class Reference	123
5.56.1	Detailed Description	124
5.56.2	Constructor & Destructor Documentation	124
5.56.2.1	MensaFeedCBNorth	124
5.57	CampusAppWP8.Feed.Mensa.MensaFeedCBSouth Class Reference	124
5.57.1	Detailed Description	124
5.57.2	Constructor & Destructor Documentation	124
5.57.2.1	MensaFeedCBSouth	124
5.58	CampusAppWP8.Feed.Mensa.MensaFeedSBFMain Class Reference	125
5.58.1	Detailed Description	125
5.58.2	Constructor & Destructor Documentation	125
5.58.2.1	MensaFeedSBFMain	125
5.59	CampusAppWP8.Pages.Mensa.MensaPage Class Reference	125
5.59.1	Detailed Description	126
5.59.2	Constructor & Destructor Documentation	126
5.59.2.1	MensaPage	126
5.59.3	Member Function Documentation	126
5.59.3.1	OnNavigatedFrom	126
5.59.3.2	OnNavigatedTo	126
5.60	CampusAppWP8.Model.Mensa.MenuModel Class Reference	126
5.60.1	Detailed Description	127
5.60.2	Constructor & Destructor Documentation	127
5.60.2.1	MenuModel	127

5.60.3	Property Documentation	127
5.60.3.1	Date	127
5.60.3.2	Day	127
5.60.3.3	Meals	127
5.61	CampusAppWP8.Model.Mensa.MenuWeekModel Class Reference	127
5.61.1	Detailed Description	128
5.61.2	Constructor & Destructor Documentation	128
5.61.2.1	MenuWeekModel	128
5.61.3	Member Function Documentation	128
5.61.3.1	CalcFirstWeekDay	128
5.61.4	Property Documentation	128
5.61.4.1	CreateTime	128
5.61.4.2	Menus	128
5.62	CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes Class Reference	128
5.62.1	Detailed Description	129
5.62.2	Member Function Documentation	129
5.62.2.1	ShowGoeWatchOptInBox	129
5.62.2.2	ShowMainModelErrorMessageBox	129
5.63	CampusAppWP8.Pages.Lecture.ModulWebPage Class Reference	129
5.63.1	Detailed Description	130
5.63.2	Constructor & Destructor Documentation	130
5.63.2.1	ModulWebPage	130
5.63.3	Member Function Documentation	130
5.63.3.1	OnNavigatedTo	130
5.64	CampusAppWP8.Utility.Lui.Button.NavigateButton Class Reference	130
5.64.1	Detailed Description	131
5.64.2	Constructor & Destructor Documentation	131
5.64.2.1	NavigateButton	131
5.64.3	Member Function Documentation	131
5.64.3.1	OnClick	131
5.64.4	Member Data Documentation	131
5.64.4.1	NavigateProperty	131
5.64.4.2	QueryNameProperty	131
5.64.4.3	QueryValueProperty	131
5.64.5	Property Documentation	132
5.64.5.1	QueryStringName	132
5.64.5.2	QueryStringValue	132
5.64.5.3	Url	132
5.65	CampusAppWP8.Feed.News.NewsFeed Class Reference	132
5.65.1	Detailed Description	132

5.65.2	Constructor & Destructor Documentation	132
5.65.2.1	NewsFeed	132
5.66	CampusAppWP8.Pages.News.NewsIndexPage Class Reference	133
5.66.1	Detailed Description	133
5.66.2	Constructor & Destructor Documentation	133
5.66.2.1	NewsIndexPage	133
5.66.3	Member Function Documentation	133
5.66.3.1	GetNewsFeed	133
5.66.3.2	OnNavigatedTo	134
5.66.4	Property Documentation	135
5.66.4.1	Feed	135
5.67	CampusAppWP8.Pages.News.NewsPage Class Reference	135
5.67.1	Detailed Description	135
5.67.2	Constructor & Destructor Documentation	135
5.67.2.1	NewsPage	135
5.67.3	Member Function Documentation	136
5.67.3.1	OnNavigatedFrom	136
5.67.3.2	OnNavigatedTo	137
5.68	CampusAppWP8.Feed.Openinghours.OpeninghoursFeed Class Reference	137
5.68.1	Detailed Description	137
5.68.2	Constructor & Destructor Documentation	137
5.68.2.1	OpeninghoursFeed	137
5.69	CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel Class Reference	138
5.69.1	Detailed Description	139
5.69.2	Constructor & Destructor Documentation	139
5.69.2.1	OpeninghoursInstitutionModel	139
5.69.3	Property Documentation	139
5.69.3.1	Building	139
5.69.3.2	Comment	139
5.69.3.3	Comment_DE	139
5.69.3.4	Comment_EN	140
5.69.3.5	EMail	140
5.69.3.6	EMailTitle	140
5.69.3.7	Friday	140
5.69.3.8	Monday	140
5.69.3.9	Phone	140
5.69.3.10	PhoneTitle	140
5.69.3.11	Room	140
5.69.3.12	Saturday	140
5.69.3.13	Sunday	140

5.69.3.14 Thursday	140
5.69.3.15 Title	140
5.69.3.16 Title_DE	141
5.69.3.17 Title_EN	141
5.69.3.18 Tuesday	141
5.69.3.19 VisibleBuilding	141
5.69.3.20 VisibleComment	141
5.69.3.21 VisibleEMail	141
5.69.3.22 VisibleFriday	141
5.69.3.23 VisibleMonday	141
5.69.3.24 VisiblePhone	141
5.69.3.25 VisibleRoom	141
5.69.3.26 VisibleSaturday	141
5.69.3.27 VisibleSunday	141
5.69.3.28 VisibleThursday	142
5.69.3.29 VisibleTuesday	142
5.69.3.30 VisibleWednesday	142
5.69.3.31 Wednesday	142
5.70 CampusAppWP8.Model.Openinghours.OpeninghoursModel Class Reference	142
5.70.1 Detailed Description	142
5.70.2 Constructor & Destructor Documentation	142
5.70.2.1 OpeninghoursModel	142
5.70.3 Property Documentation	143
5.70.3.1 CreateTime	143
5.70.3.2 Institutions	143
5.71 CampusAppWP8.Pages.Openinghours.OpeninghoursPage Class Reference	143
5.71.1 Detailed Description	143
5.71.2 Constructor & Destructor Documentation	143
5.71.2.1 OpeninghoursPage	143
5.71.3 Member Function Documentation	144
5.71.3.1 OnNavigatedFrom	144
5.71.3.2 OnNavigatedTo	145
5.72 CampusAppWP8.Utility.Lui.Button.PhoneButton Class Reference	145
5.72.1 Detailed Description	146
5.72.2 Constructor & Destructor Documentation	146
5.72.2.1 PhoneButton	146
5.72.3 Member Function Documentation	146
5.72.3.1 OnClick	146
5.72.4 Member Data Documentation	146
5.72.4.1 DisplayNameProperty	146

5.72.4.2	PhoneProperty	146
5.72.5	Property Documentation	146
5.72.5.1	DisplayName	146
5.72.5.2	Number	146
5.73	CampusAppWP8.Model.GeoDb.PlaceModel Class Reference	147
5.73.1	Detailed Description	147
5.73.2	Property Documentation	147
5.73.2.1	ParentId	147
5.73.2.2	PlaceId	147
5.73.2.3	RefPoint	147
5.74	CampusAppWP8.Pages.Lecture.ResultDetailPage Class Reference	147
5.74.1	Detailed Description	148
5.74.2	Constructor & Destructor Documentation	148
5.74.2.1	ResultDetailPage	148
5.74.3	Member Function Documentation	148
5.74.3.1	OnNavigatedTo	148
5.75	CampusAppWP8.Pages.Lecture.ResultPage Class Reference	148
5.75.1	Detailed Description	149
5.75.2	Constructor & Destructor Documentation	149
5.75.2.1	ResultPage	149
5.75.3	Member Function Documentation	149
5.75.3.1	OnNavigatedTo	149
5.76	CampusAppWP8.Model.Utility.RoleListPickerItemListModel Class Reference	149
5.76.1	Detailed Description	150
5.76.2	Constructor & Destructor Documentation	150
5.76.2.1	RoleListPickerItemListModel	150
5.76.3	Member Function Documentation	150
5.76.3.1	LoadList	150
5.77	CampusAppWP8.Model.events_news.RSSChannelModel Class Reference	150
5.77.1	Detailed Description	150
5.77.2	Constructor & Destructor Documentation	151
5.77.2.1	RSSChannelModel	151
5.77.3	Property Documentation	151
5.77.3.1	item	151
5.77.3.2	Item	151
5.78	CampusAppWP8.Model.RSS.RSSChannelModel Class Reference	151
5.78.1	Detailed Description	151
5.78.2	Constructor & Destructor Documentation	151
5.78.2.1	RSSChannelModel	151
5.78.3	Property Documentation	152

5.78.3.1	Item	152
5.79	CampusAppWP8.Model.RSS.RSSModel Class Reference	152
5.79.1	Detailed Description	152
5.79.2	Member Function Documentation	152
5.79.2.1	CompareTimeStamp	152
5.79.3	Property Documentation	153
5.79.3.1	Date	153
5.79.3.2	DTTimeStamp	153
5.79.3.3	Index	153
5.79.3.4	Link	153
5.79.3.5	Text	153
5.79.3.6	Time	153
5.79.3.7	TimeStamp	153
5.79.3.8	Title	153
5.80	CampusAppWP8.Model.events_news.RSSModel Class Reference	153
5.80.1	Detailed Description	154
5.80.2	Member Function Documentation	154
5.80.2.1	CompareTimeStamp	154
5.80.3	Property Documentation	155
5.80.3.1	Date	155
5.80.3.2	DTTimeStamp	155
5.80.3.3	Index	155
5.80.3.4	Link	155
5.80.3.5	Text	155
5.80.3.6	Time	155
5.80.3.7	TimeStamp	155
5.80.3.8	Title	155
5.81	CampusAppWP8.Model.RSS.RSSViewModel Class Reference	155
5.81.1	Detailed Description	156
5.81.2	Constructor & Destructor Documentation	156
5.81.2.1	RSSViewModel	156
5.81.3	Property Documentation	156
5.81.3.1	Channel	156
5.81.3.2	CreateTime	156
5.82	CampusAppWP8.Model.Utility.SemesterListPickerItemListModel Class Reference	156
5.82.1	Detailed Description	157
5.82.2	Constructor & Destructor Documentation	157
5.82.2.1	SemesterListPickerItemListModel	157
5.82.3	Member Function Documentation	157
5.82.3.1	LoadList	157

5.83	CampusAppWP8.Feed.GeoApi.SpsApi Class Reference	157
5.83.1	Detailed Description	158
5.83.2	Constructor & Destructor Documentation	158
5.83.2.1	SpsApi	158
5.83.3	Member Function Documentation	158
5.83.3.1	SetupPlaceRequest	158
5.84	CampusAppWP8.Model.GeoDb.SpsModel Class Reference	158
5.84.1	Detailed Description	158
5.84.2	Property Documentation	158
5.84.2.1	Places	158
5.85	CampusAppWP8.Pages.StartPage Class Reference	159
5.85.1	Detailed Description	159
5.85.2	Constructor & Destructor Documentation	159
5.85.2.1	StartPage	159
5.85.3	Member Function Documentation	159
5.85.3.1	OnNavigatedTo	159
5.86	CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed Class Reference	159
5.86.1	Detailed Description	160
5.86.2	Constructor & Destructor Documentation	160
5.86.2.1	StudentCouncilFeed	160
5.87	CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel Class Reference	160
5.87.1	Detailed Description	160
5.87.2	Constructor & Destructor Documentation	161
5.87.2.1	StudentCouncilListModel	161
5.87.3	Member Function Documentation	161
5.87.3.1	GetStudentCouncilsGroupByFaculty	161
5.87.4	Property Documentation	161
5.87.4.1	CreateTime	161
5.87.4.2	StudentCouncils	161
5.88	CampusAppWP8.Model.StudentCouncil.StudentCouncilModel Class Reference	161
5.88.1	Detailed Description	162
5.88.2	Constructor & Destructor Documentation	162
5.88.2.1	StudentCouncilModel	162
5.88.3	Property Documentation	162
5.88.3.1	Email	162
5.88.3.2	Faculty	162
5.88.3.3	Name	162
5.88.3.4	Url	162
5.89	CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage Class Reference	162
5.89.1	Detailed Description	163

5.89.2	Constructor & Destructor Documentation	163
5.89.2.1	StudentCouncilPage	163
5.89.3	Member Function Documentation	163
5.89.3.1	OnNavigatedFrom	163
5.89.3.2	OnNavigatedTo	163
5.90	CampusAppWP8.ThemelizedIcons Class Reference	163
5.90.1	Detailed Description	164
5.90.2	Property Documentation	164
5.90.2.1	ThemelizedIcon	164
5.91	CampusAppWP8.Utility.Lui.Button.ToggleButton Class Reference	164
5.91.1	Detailed Description	165
5.91.2	Constructor & Destructor Documentation	165
5.91.2.1	ToggleButton	165
5.91.3	Member Function Documentation	165
5.91.3.1	HideToggleContent	165
5.91.3.2	OnClick	165
5.91.3.3	ShowToggleContent	165
5.91.3.4	ToggleToggleContent	165
5.91.4	Member Data Documentation	165
5.91.4.1	ToggleContentTagProperty	165
5.91.5	Property Documentation	165
5.91.5.1	ToggleContentTag	165
5.92	CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar Class Reference	166
5.92.1	Detailed Description	166
5.92.2	Constructor & Destructor Documentation	166
5.92.2.1	UpdateButtonAppBar	166
5.93	CampusAppWP8.Model.Utility.UrlParamModel Class Reference	166
5.93.1	Detailed Description	167
5.93.2	Constructor & Destructor Documentation	167
5.93.2.1	UrlParamModel	167
5.93.2.2	UrlParamModel	167
5.93.3	Member Function Documentation	167
5.93.3.1	IsParamValid	167
5.93.3.2	ToString	168
5.93.4	Member Data Documentation	168
5.93.4.1	key	168
5.93.5	Property Documentation	168
5.93.5.1	Key	168
5.93.5.2	ParamToken	168
5.93.5.3	Value	168

5.94 CampusAppWP8.Pages.Setting.UserProfil Class Reference	168
5.94.1 Detailed Description	169
5.94.2 Constructor & Destructor Documentation	169
5.94.2.1 UserProfile	169
5.94.3 Member Function Documentation	169
5.94.3.1 OnNavigatedFrom	169
5.95 CampusAppWP8.Model.Setting.UserProfilModel Class Reference	169
5.95.1 Detailed Description	170
5.95.2 Member Enumeration Documentation	170
5.95.2.1 Campus	170
5.95.2.2 DegreeType	170
5.95.2.3 RoleType	170
5.95.3 Property Documentation	170
5.95.3.1 Course	170
5.95.3.2 DefaultCampus	171
5.95.3.3 Degree	171
5.95.3.4 Role	171
5.95.3.5 Semester	171
5.96 CampusAppWP8.Pages.Webmail.WebmailPage Class Reference	171
5.96.1 Detailed Description	171
5.96.2 Constructor & Destructor Documentation	171
5.96.2.1 WebmailPage	171
5.97 CampusAppWP8.Utility.XmlManager Class Reference	172
5.97.1 Detailed Description	172
5.97.2 Member Function Documentation	172
5.97.2.1 DeserializationToModel< T >	172
5.97.2.2 SerializationToString< T >	172
5.98 CampusAppWP8.Model.XmlModel< T > Class Template Reference	173
5.98.1 Detailed Description	173
5.98.2 Constructor & Destructor Documentation	173
5.98.2.1 XmlModel	173
5.98.2.2 XmlModel	174
5.98.3 Member Function Documentation	174
5.98.3.1 DeserializeModel	174
5.98.3.2 SerializeModel	174
5.98.4 Property Documentation	174
5.98.4.1 ValidRootName	174

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

CampusAppWP8	11
CampusAppWP8.Feed	11
CampusAppWP8.Feed.Departments	12
CampusAppWP8.Feed.Events	12
CampusAppWP8.Feed.GeoApi	12
CampusAppWP8.Feed.Lecture	12
CampusAppWP8.Feed.Link	12
CampusAppWP8.Feed.Mensa	12
CampusAppWP8.Feed.News	13
CampusAppWP8.Feed.Openinghours	13
CampusAppWP8.Feed.StudentCouncil	13
CampusAppWP8.Model	13
CampusAppWP8.Model.Campusmap	14
CampusAppWP8.Model.Departments	14
CampusAppWP8.Model.events_news	14
CampusAppWP8.Model.GeoDb	14
CampusAppWP8.Model.Lecture	15
CampusAppWP8.Model.Link	15
CampusAppWP8.Model.Mensa	15
CampusAppWP8.Model.Openinghours	15
CampusAppWP8.Model.RSS	16
CampusAppWP8.Model.Setting	16
CampusAppWP8.Model.StudentCouncil	16
CampusAppWP8.Model.Utility	16
CampusAppWP8.Pages	17
CampusAppWP8.Pages.Campusmap	17
CampusAppWP8.Pages.Departments	17
CampusAppWP8.Pages.Events	18
CampusAppWP8.Pages.Lecture	18
CampusAppWP8.Pages.Links	18
CampusAppWP8.Pages.Mensa	18
CampusAppWP8.Pages.News	18
CampusAppWP8.Pages.Openinghours	19
CampusAppWP8.Pages.Setting	19
CampusAppWP8.Pages.StudentCouncil	19
CampusAppWP8.Pages.Webmail	19
CampusAppWP8.Resources	19
CampusAppWP8.Utility	19

CampusAppWP8.Utility.Lui	20
CampusAppWP8.Utility.Lui.Button	20
CampusAppWP8.Utility.Lui.MessageBoxes	20

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Application	
CampusAppWP8.App	21
ApplicationBarIconButton	
CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar	166
CampusAppWP8.Resources.AppResources	22
CampusAppWP8.Model.Setting.AppSettings	36
BaseModel	
CampusAppWP8.Model.events_news.RSSChannelModel	150
CampusAppWP8.Model.events_news.RSSModel	153
Button	
CampusAppWP8.Utility.Lui.Button.EmailButton	67
CampusAppWP8.Utility.Lui.Button.GoToMapButton	77
CampusAppWP8.Utility.Lui.Button.LinkButton	98
CampusAppWP8.Utility.Lui.Button.NavigateButton	130
CampusAppWP8.Utility.Lui.Button.PhoneButton	145
CampusAppWP8.Utility.Lui.Button.ToggleButton	164
CampusAppWP8.Model.Departments.ChairModel	40
CampusAppWP8.Const	44
CampusAppWP8.Resources.Constants	45
CampusAppWP8.Model.Departments.DepartmentModel	65
CampusAppWP8.Model.Departments.FacultyModel	72
CampusAppWP8.Utility.File	75
CampusAppWP8.Utility.HttpRequest	79
CampusAppWP8.Resources.Icons	82
IDisposable	
CampusAppWP8.MainModel< T >	107
CampusAppWP8.Model.XmlModel< T >	173
CampusAppWP8.Model.Lecture.LectureActivity	85
CampusAppWP8.Model.Lecture.LectureCourse	88
CampusAppWP8.Model.Lecture.LectureDate	89
CampusAppWP8.Model.Lecture.LectureLecturer	91
CampusAppWP8.Model.Lecture.LectureList	92
CampusAppWP8.Model.Lecture.LectureModule	93
CampusAppWP8.Model.Lecture.LecturePageModel	95
CampusAppWP8.Model.Link.LinkListModel	99
CampusAppWP8.Model.Link.LinkModel	100
CampusAppWP8.Model.Utility.ListPickerItemListModel	102
CampusAppWP8.Model.Utility.CampusListPickerItemListModel	37

CampusAppWP8.Model.Utility.CourseListPickerItemListModel	58
CampusAppWP8.Model.Utility.DegreeListPickerItemListModel	59
CampusAppWP8.Model.Utility.RoleListPickerItemListModel	149
CampusAppWP8.Model.Utility.SemesterListPickerItemListModel	156
CampusAppWP8.Model.Utility.ListPickerItemModel	105
CampusAppWP8.LocalizedStrings	106
CampusAppWP8.Utility.Logger	106
CampusAppWP8.Model.Campusmap.MapModel	113
CampusAppWP8.Model.Campusmap.CBMainMapModel	40
CampusAppWP8.Model.Campusmap.MapPinModel	119
CampusAppWP8.Model.Mensa.MealModel	120
CampusAppWP8.Model.Mensa.MenuModel	126
CampusAppWP8.Model.Mensa.MenuWeekModel	127
CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes	128
CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel	138
CampusAppWP8.Model.Openinghours.OpeninghoursModel	142
PhoneApplicationPage	
CampusAppWP8.Pages.Campusmap.CampusMapPage	37
CampusAppWP8.Pages.Departments.DepartmentFavoritePage	60
CampusAppWP8.Pages.Departments.DepartmentIndexPage	62
CampusAppWP8.Pages.Departments.DepartmentInfoPage	64
CampusAppWP8.Pages.Departments.DepartmentPage	66
CampusAppWP8.Pages.Events.EventIndexPage	69
CampusAppWP8.Pages.Events.EventPage	70
CampusAppWP8.Pages.Lecture.LecturePage	94
CampusAppWP8.Pages.Lecture.ModulWebPage	129
CampusAppWP8.Pages.Lecture.ResultDetailPage	147
CampusAppWP8.Pages.Lecture.ResultPage	148
CampusAppWP8.Pages.Links.LinkPage	101
CampusAppWP8.Pages.Mensa.MensaPage	125
CampusAppWP8.Pages.News.NewsIndexPage	133
CampusAppWP8.Pages.News.NewsPage	135
CampusAppWP8.Pages.Openinghours.OpeninghoursPage	143
CampusAppWP8.Pages.Setting.AppSettingPage	35
CampusAppWP8.Pages.Setting.UserProfil	168
CampusAppWP8.Pages.StartPage	159
CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage	162
CampusAppWP8.Pages.Webmail.WebmailPage	171
CampusAppWP8.Model.GeoDb.PlaceModel	147
CampusAppWP8.Model.RSS.RSSChannelModel	151
CampusAppWP8.Model.RSS.RSSModel	152
CampusAppWP8.Model.RSS.RSSViewModel	155
CampusAppWP8.Model.GeoDb.SpsModel	158
CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel	160
CampusAppWP8.Model.StudentCouncil.StudentCouncilModel	161
CampusAppWP8.ThemelizedIcons	163
CampusAppWP8.Model.Utility.UrlParamModel	166
CampusAppWP8.Model.Utility.CleanUrlParamModel	42
CampusAppWP8.Model.Setting.UserProfilModel	169
CampusAppWP8.Utility.XmlManager	172
XmlModel< DepartmentModel >	
CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed	60
CampusAppWP8.Feed.Departments.DepartmentFeed	61
XmlModel< LectureList >	
CampusAppWP8.Feed.Lecture.LectureApi	88
XmlModel< LinkListModel >	
CampusAppWP8.Feed.Link.ClubLinkFeed	43
CampusAppWP8.Feed.Link.CommonLinkFeed	44

XmlModel< MenuWeekModel >	
CampusAppWP8.Feed.Mensa.MensaFeed	121
CampusAppWP8.Feed.Mensa.MensaFeedCBMain	122
CampusAppWP8.Feed.Mensa.MensaFeedCBNorth	123
CampusAppWP8.Feed.Mensa.MensaFeedCBSouth	124
CampusAppWP8.Feed.Mensa.MensaFeedSBFMain	125
XmlModel< OpeninghoursModel >	
CampusAppWP8.Feed.Openinghours.OpeninghoursFeed	137
XmlModel< RSSViewModel >	
CampusAppWP8.Feed.Events.EventFeed	68
CampusAppWP8.Feed.News.NewsFeed	132
XmlModel< SpsModel >	
CampusAppWP8.Feed.GeoApi.SpsApi	157
CampusAppWP8.Feed.GeoApi.CampusSpsApi	38
XmlModel< StudentCouncilListModel >	
CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed	159

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

CampusAppWP8.App	21
CampusAppWP8.Resources.AppResources Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw. . . .	22
CampusAppWP8.Pages.Setting.AppSettingPage Class for the AppSettingPage	35
CampusAppWP8.Model.Setting.AppSettings Model for settings of the app	36
CampusAppWP8.Model.Utility.CampusListPickerItemListModel This Class creates a list of degrees	37
CampusAppWP8.Pages.Campusmap.CampusMapPage Class for the campusMap page	37
CampusAppWP8.Feed.GeoApi.CampusSpsApi Class for SPSAPI	38
CampusAppWP8.Model.Campusmap.CBMainMapModel Class for the MapModel of the mainCampus of cottbus	40
CampusAppWP8.Model.Departments.ChairModel Class to hold information about a professorship chair.	40
CampusAppWP8.Model.Utility.CleanUrlParamModel This class is a Model for the URLParameter like GET-Parameter	42
CampusAppWP8.Feed.Link.ClubLinkFeed This Class is for ClubLinkFeeds	43
CampusAppWP8.Feed.Link.CommonLinkFeed This Class is for CommonLinkFeeds	44
CampusAppWP8.Const Access to Constants.rex	44
CampusAppWP8.Resources.Constants Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw. . . .	45
CampusAppWP8.Model.Utility.CourseListPickerItemListModel This is a class for the courseList	58
CampusAppWP8.Model.Utility.DegreeListPickerItemListModel This Class creates a list of degrees	59
CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed Feed object to handle favorite department feeds.	60
CampusAppWP8.Pages.Departments.DepartmentFavoritePage Page to visualize the favorite department list.	60
CampusAppWP8.Feed.Departments.DepartmentFeed Feed class for the department information.	61

CampusAppWP8.Pages.Departments.DepartmentIndexPage	
Page with a list of the faculties.	62
CampusAppWP8.Pages.Departments.DepartmentInfoPage	
Info page of a chair.	64
CampusAppWP8.Model.Departments.DepartmentModel	
View model for department page.	65
CampusAppWP8.Pages.Departments.DepartmentPage	
Pivot page with list of the chairs of the faculties.	66
CampusAppWP8.Utility.Lui.Button.EmailButton	
This class create an Button which start the Email-Client	67
CampusAppWP8.Feed.Events.EventFeed	
Event Feed	68
CampusAppWP8.Pages.Events.EventIndexPage	
Overview page of all events.	69
CampusAppWP8.Pages.Events.EventPage	
EventPage , where every event fees has his own PivotItem	70
CampusAppWP8.Model.Departments.FacultyModel	
Model for holding the faculty information.	72
CampusAppWP8.Utility.File	
File class.	75
CampusAppWP8.Utility.Lui.Button.GoToMapButton	
This class create an Button which open a Map	77
CampusAppWP8.Utility.HttpRequest	
Class realize the access of restful HttpRequest	79
CampusAppWP8.Resources.Icons	
Icons uri string.	82
CampusAppWP8.Model.Lecture.LectureActivity	
Model for a Activity	85
CampusAppWP8.Feed.Lecture.LectureApi	
Class for the feed of the Lecture	88
CampusAppWP8.Model.Lecture.LectureCourse	
Model for a course	88
CampusAppWP8.Model.Lecture.LectureDate	
Model for the date of an activity	89
CampusAppWP8.Model.Lecture.LectureLecturer	
Model for a lecturer	91
CampusAppWP8.Model.Lecture.LectureList	
Model for a List of LectureActivity	92
CampusAppWP8.Model.Lecture.LectureModule	
Model for the module of an lecture	93
CampusAppWP8.Pages.Lecture.LecturePage	
Class for the LecturePage	94
CampusAppWP8.Model.Lecture.LecturePageModel	
Model for the LecturePage	95
CampusAppWP8.Utility.Lui.Button.LinkButton	
This class create an Button which start the WebBrowser, which an certain url	98
CampusAppWP8.Model.Link.LinkListModel	
Model for a list of links.	99
CampusAppWP8.Model.Link.LinkModel	
Model for menu	100
CampusAppWP8.Pages.Links.LinkPage	
Class for the LinkPage	101
CampusAppWP8.Model.Utility.ListPickerItemListModel	
Class for a List of ListPickerItems	102
CampusAppWP8.Model.Utility.ListPickerItemModel	
Model for the ListPickerItems	105
CampusAppWP8.LocalizedStrings	
Bietet Zugriff auf Zeichenfolgenressourcen.	106

CampusAppWP8.Utility.Logger	
This Class creates logs for the app	106
CampusAppWP8.MainModel< T >	
Base model io handling class.	107
CampusAppWP8.Model.Campusmap.MapModel	
This Class manage the properties of a Map	113
CampusAppWP8.Model.Campusmap.MapPinModel	
This Class manage the properties of a MapPin	119
CampusAppWP8.Model.Mensa.MealModel	
Model for a meal	120
CampusAppWP8.Feed.Mensa.MensaFeed	
This Class is for MensaFeeds	121
CampusAppWP8.Feed.Mensa.MensaFeedCBMain	
MensaFeed for main campus of cottbus	122
CampusAppWP8.Feed.Mensa.MensaFeedCBNorth	
MensaFeed for main campus of cottbus	123
CampusAppWP8.Feed.Mensa.MensaFeedCBSouth	
MensaFeed for main campus of cottbus	124
CampusAppWP8.Feed.Mensa.MensaFeedSBFMain	
MensaFeed for main campus of cottbus	125
CampusAppWP8.Pages.Mensa.MensaPage	
Class for the MensaPage	125
CampusAppWP8.Model.Mensa.MenuModel	
Model for menu	126
CampusAppWP8.Model.Mensa.MenuWeekModel	
Model for menus in one week	127
CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes	
Class creates some MessageBoxes	128
CampusAppWP8.Pages.Lecture.ModulWebPage	
Class for the page which shows Webpages from the BaseAddress Constants.UrlLecture_Modul-BaseAddr	129
CampusAppWP8.Utility.Lui.Button.NavigateButton	
This class create an Button which navigate to a certain page	130
CampusAppWP8.Feed.News.NewsFeed	
News Feed.	132
CampusAppWP8.Pages.News.NewsIndexPage	
Overview page of all news.	133
CampusAppWP8.Pages.News.NewsPage	
EventPage, where every news fees has his own PivotItem.	135
CampusAppWP8.Feed.Openinghours.OpeninghoursFeed	
This Class is for MesaFeeds	137
CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel	
Model for menu	138
CampusAppWP8.Model.Openinghours.OpeninghoursModel	
Model for opening hours.	142
CampusAppWP8.Pages.Openinghours.OpeninghoursPage	
Opening hours page.	143
CampusAppWP8.Utility.Lui.Button.PhoneButton	
This class create an Button which start a PhoneCall	145
CampusAppWP8.Model.GeoDb.PlaceModel	
Model for a place of the SPSService	147
CampusAppWP8.Pages.Lecture.ResultDetailPage	
Class for the page which shows details of an activity	147
CampusAppWP8.Pages.Lecture.ResultPage	
Class for the page which shows the results of an LectureRequest	148
CampusAppWP8.Model.Utility.RoleListPickerItemListModel	
Class for the RoleList	149

CampusAppWP8.Model.events_news.RSSChannelModel	
Channel Model , which contains the rss feed item list.	150
CampusAppWP8.Model.RSS.RSSChannelModel	
Channel Model , which contains the RSS feed item list.	151
CampusAppWP8.Model.RSS.RSSModel	
Contains the RSS feed information.	152
CampusAppWP8.Model.events_news.RSSModel	
Contains the rss feed informations.	153
CampusAppWP8.Model.RSS.RSSViewModel	
ViewModel of the RSS feed, containing the feed/channel object.	155
CampusAppWP8.Model.Utility.SemesterListPickerItemListModel	
Class for the SemesterList	156
CampusAppWP8.Feed.GeoApi.SpsApi	
Class for SPSAPI	157
CampusAppWP8.Model.GeoDb.SpsModel	
Model for a xml-response of the SPSService	158
CampusAppWP8.Pages.StartPage	
Class for the StartPage	159
CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed	
This Class is for StudentCouncilFeed	159
CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel	
Model for menus in one week	160
CampusAppWP8.Model.StudentCouncil.StudentCouncilModel	
Model for menu	161
CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage	
Class for the StudentCouncilPage	162
CampusAppWP8.ThemelizedIcons	
Theme icons.	163
CampusAppWP8.Utility.Lui.Button.ToggleButton	
This class create an Button which can toggle the Visibility of certain FrameworkElements	164
CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar	
This class create an Button which start the Email-Client	166
CampusAppWP8.Model.Utility.UrlParamModel	
This class is a Model for the URLParameter like GET-Parameter	166
CampusAppWP8.Pages.Setting.UserProfil	
Class for the UserProfilePage	168
CampusAppWP8.Model.Setting.UserProfilModel	
Model for the profile of an user	169
CampusAppWP8.Pages.Webmail.WebmailPage	
Class for the WebmailPage	171
CampusAppWP8.Utility.XmlManager	
Class provides some Xml-methods	172
CampusAppWP8.Model.XmlModel< T >	
Xml model io handler class.	173

Chapter 4

Namespace Documentation

4.1 Package CampusAppWP8

Namespaces

- package [Feed](#)
- package [Model](#)
- package [Pages](#)
- package [Resources](#)
- package [Utility](#)

Classes

- class [App](#)
- class [Const](#)
Access to Constants.rex
- class [LocalizedStrings](#)
Bietet Zugriff auf Zeichenfolgenressourcen.
- class [MainModel< T >](#)
Base model io handling class.
- class **Settings**
Class handle all setting (files)
- class [ThemelizedIcons](#)
Theme icons.

4.2 Package CampusAppWP8.Feed

Namespaces

- package [Departments](#)
- package [Events](#)
- package [GeoApi](#)
- package [Lecture](#)
- package [Link](#)
- package [Mensa](#)
- package [News](#)
- package [Openinghours](#)
- package [StudentCouncil](#)

4.3 Package CampusAppWP8.Feed.Departments

Classes

- class [DepartmentFavoriteFeed](#)
Feed object to handle favorite department feeds.
- class [DepartmentFeed](#)
Feed class for the department information.

4.4 Package CampusAppWP8.Feed.Events

Classes

- class [EventFeed](#)
Event Feed.

4.5 Package CampusAppWP8.Feed.GeoApi

Classes

- class [CampusSpsApi](#)
Class for SPSAPI
- class [SpsApi](#)
Class for SPSAPI

4.6 Package CampusAppWP8.Feed.Lecture

Classes

- class [LectureApi](#)
Class for the feed of the Lecture

4.7 Package CampusAppWP8.Feed.Link

Classes

- class [ClubLinkFeed](#)
This Class is for ClubLinkFeeds
- class [CommonLinkFeed](#)
This Class is for CommonLinkFeeds

4.8 Package CampusAppWP8.Feed.Mensa

Classes

- class [MensaFeed](#)
This Class is for MensaFeeds

- class [MensaFeedCBMain](#)
MensaFeed for main campus of cottbus
- class [MensaFeedCBNorth](#)
MensaFeed for main campus of cottbus
- class [MensaFeedCBSouth](#)
MensaFeed for main campus of cottbus
- class [MensaFeedSBFMain](#)
MensaFeed for main campus of cottbus

4.9 Package CampusAppWP8.Feed.News

Classes

- class [NewsFeed](#)
News Feed.

4.10 Package CampusAppWP8.Feed.Openinghours

Classes

- class [OpeninghoursFeed](#)
This Class is for MesaFeeds

4.11 Package CampusAppWP8.Feed.StudentCouncil

Classes

- class [StudentCouncilFeed](#)
This Class is for [StudentCouncilFeed](#)

4.12 Package CampusAppWP8.Model

Namespaces

- package [Campusmap](#)
- package [Departments](#)
- package [events_news](#)
- package [GeoDb](#)
- package [Lecture](#)
- package [Link](#)
- package [Mensa](#)
- package [Openinghours](#)
- package [RSS](#)
- package [Setting](#)
- package [StudentCouncil](#)
- package [Utility](#)

Classes

- class [XmlModel< T >](#)
Xml model io handler class.

4.13 Package CampusAppWP8.Model.Campusmap

Classes

- class [CBMainMapModel](#)
Class for the [MapModel](#) of the mainCampus of cottbus
- class [MapModel](#)
This Class manage the properties of a Map
- class [MapPinModel](#)
This Class manage the properties of a MapPin

4.14 Package CampusAppWP8.Model.Departments

Classes

- class [ChairModel](#)
Class to hold information about a professorship chair.
- class [DepartmentModel](#)
View model for department page.
- class [FacultyModel](#)
Model for holding the faculty information.

4.15 Package CampusAppWP8.Model.events_news

Classes

- class [RSSChannelModel](#)
Channel [Model](#), which contains the rss feed item list.
- class [RSSModel](#)
Contains the rss feed informations.

4.16 Package CampusAppWP8.Model.GeoDb

Classes

- class [PlaceModel](#)
Model for a place of the SPSService
- class [SpsModel](#)
Model for a xml-response of the SPSService

4.17 Package CampusAppWP8.Model.Lecture

Classes

- class [LectureActivity](#)
Model for a Activity
- class [LectureCourse](#)
Model for a course
- class [LectureDate](#)
Model for the date of an activity
- class [LectureLecturer](#)
Model for a lecturer
- class [LectureList](#)
Model for a List of [LectureActivity](#)
- class [LectureModule](#)
Model for the module of an lecture
- class [LecturePageModel](#)
Model for the LecturePage

4.18 Package CampusAppWP8.Model.Link

Classes

- class [LinkListModel](#)
Model for a list of links.
- class [LinkModel](#)
Model for menu

4.19 Package CampusAppWP8.Model.Mensa

Classes

- class [MealModel](#)
Model for a meal
- class [MenuModel](#)
Model for menu
- class [MenuWeekModel](#)
Model for menus in one week

4.20 Package CampusAppWP8.Model.Openinghours

Classes

- class [OpeninghoursInstitutionModel](#)
Model for menu
- class [OpeninghoursModel](#)
Model for opening hours.

4.21 Package CampusAppWP8.Model.RSS

Classes

- class [RSSChannelModel](#)
Channel Model, which contains the RSS feed item list.
- class [RSSModel](#)
Contains the RSS feed information.
- class [RSSViewModel](#)
ViewModel of the RSS feed, containing the feed/channel object.

4.22 Package CampusAppWP8.Model.Setting

Classes

- class [AppSettings](#)
Model for settings of the app
- class [UserProfilModel](#)
Model for the profile of an user

4.23 Package CampusAppWP8.Model.StudentCouncil

Classes

- class [StudentCouncilListModel](#)
Model for menus in one week
- class [StudentCouncilModel](#)
Model for menu

4.24 Package CampusAppWP8.Model.Utility

Classes

- class [CampusListPickerItemListModel](#)
This Class creates a list of degrees
- class [CleanUrlParamModel](#)
This class is a Model for the URLParameter like GET-Parameter
- class [CourseListPickerItemListModel](#)
This is a class for the courseList
- class [DegreeListPickerItemListModel](#)
This Class creates a list of degrees
- class [ListPickerItemListModel](#)
Class for a List of ListPickerItems
- class [ListPickerItemModel](#)
Model for the ListPickerItems
- class [RoleListPickerItemListModel](#)
Class for the RoleList
- class [SemesterListPickerItemListModel](#)

Class for the SemesterList

- class [UrlParamModel](#)

This class is a [Model](#) for the URLParameter like GET-Parameter

4.25 Package CampusAppWP8.Pages

Namespaces

- package [Campusmap](#)
- package [Departments](#)
- package [Events](#)
- package [Lecture](#)
- package [Links](#)
- package [Mensa](#)
- package [News](#)
- package [Openinghours](#)
- package [Setting](#)
- package [StudentCouncil](#)
- package [Webmail](#)

Classes

- class [StartPage](#)

Class for the [StartPage](#)

4.26 Package CampusAppWP8.Pages.Campusmap

Classes

- class [CampusMapPage](#)

Class for the [campusMap](#) page

4.27 Package CampusAppWP8.Pages.Departments

Classes

- class [DepartmentFavoritePage](#)

Page to visualize the favorite department list.

- class [DepartmentIndexPage](#)

Page with a list of the faculties.

- class [DepartmentInfoPage](#)

Info page of a chair.

- class [DepartmentPage](#)

Pivot page with list of the chairs of the faculties.

4.28 Package CampusAppWP8.Pages.Events

Classes

- class [EventIndexPage](#)
Overview page of all events.
- class [EventPage](#)
EventPage, where every event fees has his own PivotItem.

4.29 Package CampusAppWP8.Pages.Lecture

Classes

- class [LecturePage](#)
Class for the [LecturePage](#)
- class [ModulWebPage](#)
Class for the page which shows Webpages from the BaseAddress [Constants.UrlLecture_ModulBaseAddr](#)
- class [ResultDetailPage](#)
Class for the page which shows details of an activity
- class [ResultPage](#)
Class for the page which shows the results of an [LectureRequest](#)

4.30 Package CampusAppWP8.Pages.Links

Classes

- class [LinkPage](#)
Class for the [LinkPage](#)

4.31 Package CampusAppWP8.Pages.Mensa

Classes

- class [MensaPage](#)
Class for the [MensaPage](#)

4.32 Package CampusAppWP8.Pages.News

Classes

- class [NewsIndexPage](#)
Overview page of all news.
- class [NewsPage](#)
EventPage, where every news fees has his own PivotItem.

4.33 Package CampusAppWP8.Pages.Openinghours

Classes

- class [OpeninghoursPage](#)
Opening hours page.

4.34 Package CampusAppWP8.Pages.Setting

Classes

- class [AppSettingPage](#)
Class for the [AppSettingPage](#)
- class [UserProfil](#)
Class for the [UserProfilePage](#)

4.35 Package CampusAppWP8.Pages.StudentCouncil

Classes

- class [StudentCouncilPage](#)
Class for the [StudentCouncilPage](#)

4.36 Package CampusAppWP8.Pages.Webmail

Classes

- class [WebmailPage](#)
Class for the [WebmailPage](#)

4.37 Package CampusAppWP8.Resources

Classes

- class [AppResources](#)
Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.
- class [Constants](#)
Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.
- class [Icons](#)
[Icons](#) uri string.

4.38 Package CampusAppWP8.Utility

Namespaces

- package [Lui](#)

Classes

- class [File](#)
File class.
- class [HttpRequest](#)
Class realize the access of restful [HttpRequest](#)
- class [Logger](#)
This Class creates logs for the app
- class **StringManager**
Class provides some special StringMethods
- class **Utilities**
Collection of utility functions.
- class [XmlManager](#)
Class provides some Xml-methods

4.39 Package CampusAppWP8.Utility.Lui

Namespaces

- package [Button](#)
- package [MessageBoxes](#)

4.40 Package CampusAppWP8.Utility.Lui.Button

Classes

- class [EmailButton](#)
This class create an [Button](#) which start the Email-Client
- class [GoToMapButton](#)
This class create an [Button](#) which open a Map
- class [LinkButton](#)
This class create an [Button](#) which start the WebBrowser, which an certain url
- class [NavigateButton](#)
This class create an [Button](#) which navigate to a certain page
- class [PhoneButton](#)
This class create an [Button](#) which start a PhoneCall
- class [ToggleButton](#)
This class create an [Button](#) which can toggle the Visibility of certain FrameworkElements
- class [UpdateButtonAppBar](#)
This class create an [Button](#) which start the Email-Client

4.41 Package CampusAppWP8.Utility.Lui.MessageBoxes

Classes


- class [MessageBoxes](#)
Class creates some [MessageBoxes](#)

Chapter 5

Class Documentation

5.1 CampusAppWP8.App Class Reference

Inheritance diagram for CampusAppWP8.App:



Public Member Functions

- [App](#) ()
Konstruktor für das Application-Objekt.

Static Public Member Functions

- static void [SaveToIsolatedStorage](#)< T > (string key, T value)
Method save any object to the IsolatedStorage
- static T [LoadFromIsolatedStorage](#)< T > (string key)
Method load any object to the IsolatedStorage
- static void [SaveToAppState](#)< T > (string key, T value)
Method save any object to the IsolatedStorage
- static T [LoadFromAppState](#)< T > (string key)
Method load any object to the IsolatedStorage

Properties

- static PhoneApplicationFrame [RootFrame](#) [get, set]
Bietet einen einfachen Zugriff auf den Stammframe der Phone-Anwendung.

5.1.1 Constructor & Destructor Documentation

5.1.1.1 CampusAppWP8.App.App ()

Konstruktor für das Application-Objekt.

5.1.2 Member Function Documentation

5.1.2.1 `static T CampusAppWP8.App.LoadFromAppState< T > (string key) [static]`

Method load any object to the IsolatedStorage

Parameters

<i>key</i>	key of the object
------------	-------------------

5.1.2.2 `static T CampusAppWP8.App.LoadFromIsolatedStorage< T > (string key) [static]`

Method load any object to the IsolatedStorage

Parameters

<i>key</i>	key of the object
------------	-------------------

5.1.2.3 `static void CampusAppWP8.App.SaveToAppState< T > (string key, T value) [static]`

Method save any object to the IsolatedStorage

Parameters

<i>key</i>	key of the object
<i>value</i>	value of the object, if value == null => remove key

5.1.2.4 `static void CampusAppWP8.App.SaveToIsolatedStorage< T > (string key, T value) [static]`

Method save any object to the IsolatedStorage

Parameters

<i>key</i>	key of the object
<i>value</i>	value of the object, if value == null => remove key

5.1.3 Property Documentation

5.1.3.1 `PhoneApplicationFrame CampusAppWP8.App.RootFrame [static],[get],[set]`

Bietet einen einfachen Zugriff auf den Stammframe der Phone-Anwendung.

Returns

Der Stammframe der Phone-Anwendung.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/App.xaml.cs

5.2 CampusAppWP8.Resources.AppResources Class Reference

Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.

Properties

- static
global::System.Resources.ResourceManager [ResourceManager](#) [get]
Gibt die zwischengespeicherte ResourceManager-Instanz zurück, die von dieser Klasse verwendet wird.
- static
global::System.Globalization.CultureInfo [Culture](#) [get, set]
Überschreibt die CurrentUICulture-Eigenschaft des aktuellen Threads für alle Ressourcenzuordnungen, die diese stark typisierte Ressourcenklasse verwenden.
- static string [Add](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Hinzufügen ähnelt.
- static string [AppBarButtonText](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Hinzufügen ähnelt.
- static string [AppBarMenuItemText](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Menübefehl ähnelt.
- static string [ApplicationTitle](#) [get]
Sucht eine lokalisierte Zeichenfolge, die BTU CampusApp ähnelt.
- static string [Building](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Gebäude ähnelt.
- static string [Campus_CBMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Cottbus Hauptcampus ähnelt.
- static string [Campus_CBNorth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Cottbus Nordcampus ähnelt.
- static string [Campus_CBSouth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Cottbus Südcampus ähnelt.
- static string [Campus_SFBMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Senftenberg Hauptcampus ähnelt.
- static string [CampusMapApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Campusplan ähnelt.
- static string [Degree_Bachelor](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Bachelor ähnelt.
- static string [Degree_Diploma](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Diplom ähnelt.
- static string [Degree_Master](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Master ähnelt.
- static string [Delete](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Löschen ähnelt.
- static string [DeleteFailed](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Löschung ist fehlgeschlagen ähnelt.
- static string [DeleteSucceeded](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Löschung war erfolgreich ähnelt.
- static string [DepartmentApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Lehrstühle ähnelt.
- static string [EventApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Events ähnelt.
- static string [Faculty](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Fakultät ähnelt.
- static string [Favorites](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Favoriten ähnelt.
- static string [Hint](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Hinweis ähnelt.

- static string [HomeworkApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Hausaufgaben ähnelt.
- static string [HomeworkApp_Title2](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Hausaufgaben ähnelt.
- static string [Info](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Details ähnelt.
- static string [LectureApp_Course](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.
- static string [LectureApp_Courses](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Studiengänge ähnelt.
- static string [LectureApp_Degree](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.
- static string [LectureApp_Department](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Lehrstuhl ähnelt.
- static string [LectureApp_DetailsHeader](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Vorlesungen - Details ähnelt.
- static string [LectureApp_LectureName](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Veranstaltungsname ähnelt.
- static string [LectureApp_LectureTopic](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Lehrinhalt ähnelt.
- static string [LectureApp_Officer](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Verantwortlicher ähnelt.
- static string [LectureApp_Semester](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.
- static string [LectureApp_Term](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Fachsemester ähnelt.
- static string [LectureApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Vorlesungen ähnelt.
- static string [LectureApp_Type](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Veranstaltungsart ähnelt.
- static string [LinkApp_ClubLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die stud. Vereine ähnelt.
- static string [LinkApp_CommonLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die allg. Links ähnelt.
- static string [LinkApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Links ähnelt.
- static string [ListPickerHeaderCampus](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Campusauswahl ähnelt.
- static string [ListPickerHeaderCourse](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Studiengangsauswahl ähnelt.
- static string [ListPickerHeaderDegree](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Abschlussauswahl ähnelt.
- static string [ListPickerHeaderRole](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Rollenauswahl ähnelt.
- static string [ListPickerHeaderSemester](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Semesterauswahl ähnelt.
- static string [MailApp_Title](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Webmail ähnelt.
- static string [MensaApp_Action](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Aktion ähnelt.
- static string [MensaApp_Bio](#) [get]

- Sucht eine lokalisierte Zeichenfolge, die Bio ähnelt.*

 - static string [MensaApp_Dinner1](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Essen 1 ähnelt.*

 - static string [MensaApp_Dinner2](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Essen 2 ähnelt.*

 - static string [MensaApp_Dinner3](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Essen 3 ähnelt.*

 - static string [MensaApp_Dinner4](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Essen 4 ähnelt.*

 - static string [MensaApp_Dinner5](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Essen 5 ähnelt.*

 - static string [MensaApp_DinnerLabelW](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die 84 ähnelt.*

 - static string [MensaApp_NoToday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Heute nicht im Angebot ähnelt.*

 - static string [MensaApp_Soup](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Suppe ähnelt.*

 - static string [MensaApp_Title](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Mensaplan ähnelt.*

 - static string [MsgBox_ErrorCampusLoc](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Der aktuelle Campus konnte nicht ermittelt werden. Es wird der im Profil festgelegten Campus verwendet. ähnelt.*

 - static string [MsgBox_ErrorHeader](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Fehler ähnelt.*

 - static string [MsgBox_ErrorMainModelLoad](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Beim Laden des Inhaltes ist ein Fehler aufgetreten ähnelt.*

 - static string [MsgBox_ErrorMainModelLoadFile](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Datei konnte nicht geladen werden ähnelt.*

 - static string [MsgBox_ErrorMainModelLoadWeb](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Es konnte kein neuer Inhalt aus den Web geladen werden ähnelt.*

 - static string [MsgBox_GeoWatchOptInHeader](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Ortung ähnelt.*

 - static string [MsgBox_GeoWatchOptInText](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Dürfen Positionsdaten erhoben und verwendet werden? ähnelt.*

 - static string [NewsApp_Title](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die News ähnelt.*

 - static string [NewsHomeBtn](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die zur Übersicht ähnelt.*

 - static string [NewsLinkBtn](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Link ähnelt.*

 - static string [OpenHoursApp_Title](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Öffnungszeiten ähnelt.*

 - static string [OpenHoursApp_Title2](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Öffnungs- zeiten ähnelt.*

 - static string [OSAApp_Title](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Fachschaften ähnelt.*

 - static string [Professorship_chairs](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Lehrstühle ähnelt.*

 - static string [ResourceFlowDirection](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die LeftToRight ähnelt.*

 - static string [ResourceLanguage](#) [get]

- Sucht eine lokalisierte Zeichenfolge, die de-de ähnelt.*

 - static string [Room](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Raum ähnelt.*

 - static string [SampleProperty](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Beispielwert für die Laufzeiteigenschaft ähnelt.*

 - static string [Setting_App](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Appeinstellungen ähnelt.*

 - static string [Setting_AppGeoWatch](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Ortung ähnelt.*

 - static string [Setting_ApplAppBarTitle](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Appeinstellungen ähnelt.*

 - static string [Setting_RoleStaff](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Mitarbeiter ähnelt.*

 - static string [Setting_RoleStudent](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Student ähnelt.*

 - static string [Setting_User](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Profileinstellungen ähnelt.*

 - static string [Setting_UserCampus](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Campus ähnelt.*

 - static string [Setting_UserCourse](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.*

 - static string [Setting_UserDegree](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.*

 - static string [Setting_UserProfilAppBarTitle](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Profileinstellungen ähnelt.*

 - static string [Setting_UserRole](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Rolle ähnelt.*

 - static string [Setting_UserSemester](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.*

 - static string [Time_Day_Friday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Freitag ähnelt.*

 - static string [Time_Day_Monday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Montag ähnelt.*

 - static string [Time_Day_Saturday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Samstag ähnelt.*

 - static string [Time_Day_Sunday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Sonntag ähnelt.*

 - static string [Time_Day_Thursday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Donnerstag ähnelt.*

 - static string [Time_Day_Tuesday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Dienstag ähnelt.*

 - static string [Time_Day_Wednesday](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Mittwoch ähnelt.*

 - static string [TimeTableApp_Title](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Stundenplan ähnelt.*

 - static string [UpdateBtn](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Aktualisieren ähnelt.*

 - static string [WelcomeString](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Willkommen zur BTU-CampusApp WP8 ähnelt.*

5.2.1 Detailed Description

Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.

5.2.2 Property Documentation

5.2.2.1 `string CampusAppWP8.Resources.AppResources.Add` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Hinzufügen ähnelt.

5.2.2.2 `string CampusAppWP8.Resources.AppResources.AppBarButtonText` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Hinzufügen ähnelt.

5.2.2.3 `string CampusAppWP8.Resources.AppResources.AppBarMenuItemText` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Menübefehl ähnelt.

5.2.2.4 `string CampusAppWP8.Resources.AppResources.ApplicationTitle` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die BTU CampusApp ähnelt.

5.2.2.5 `string CampusAppWP8.Resources.AppResources.Building` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Gebäude ähnelt.

5.2.2.6 `string CampusAppWP8.Resources.AppResources.Campus_CBMain` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Cottbus Hauptcampus ähnelt.

5.2.2.7 `string CampusAppWP8.Resources.AppResources.Campus_CBNorth` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Cottbus Nordcampus ähnelt.

5.2.2.8 `string CampusAppWP8.Resources.AppResources.Campus_CBSouth` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Cottbus Südcampus ähnelt.

5.2.2.9 `string CampusAppWP8.Resources.AppResources.Campus_SFBMain` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Senftenberg Hauptcampus ähnelt.

5.2.2.10 `string CampusAppWP8.Resources.AppResources.CampusMapApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Campusplan ähnelt.

5.2.2.11 `global.System.Globalization.CultureInfo CampusAppWP8.Resources.AppResources.Culture` `[static], [get], [set]`

Überschreibt die `CurrentUICulture`-Eigenschaft des aktuellen Threads für alle Ressourcenzuordnungen, die diese stark typisierte Ressourcenklasse verwenden.

5.2.2.12 `string CampusAppWP8.Resources.AppResources.Degree_Bachelor` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Bachelor ähnelt.

5.2.2.13 `string CampusAppWP8.Resources.AppResources.Degree_Diploma` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Diplom ähnelt.

5.2.2.14 `string CampusAppWP8.Resources.AppResources.Degree_Master` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Master ähnelt.

5.2.2.15 `string CampusAppWP8.Resources.AppResources.Delete` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Löschen ähnelt.

5.2.2.16 `string CampusAppWP8.Resources.AppResources.DeleteFailed` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Löschung ist fehlgeschlagen ähnelt.

5.2.2.17 `string CampusAppWP8.Resources.AppResources.DeleteSucceeded` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Löschung war erfolgreich ähnelt.

5.2.2.18 `string CampusAppWP8.Resources.AppResources.DepartmentApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Lehrstühle ähnelt.

5.2.2.19 `string CampusAppWP8.Resources.AppResources.EventApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Events ähnelt.

5.2.2.20 `string CampusAppWP8.Resources.AppResources.Faculty` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Fakultät ähnelt.

5.2.2.21 `string CampusAppWP8.Resources.AppResources.Favorites` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Favoriten ähnelt.

5.2.2.22 `string CampusAppWP8.Resources.AppResources.Hint` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Hinweis ähnelt.

5.2.2.23 `string CampusAppWP8.Resources.AppResources.HomeworkApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Hausaufgaben ähnelt.

5.2.2.24 `string CampusAppWP8.Resources.AppResources.HomeworkApp_Title2` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Hausaufgaben ähnelt.

5.2.2.25 `string CampusAppWP8.Resources.AppResources.Info` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Details ähnelt.

5.2.2.26 `string CampusAppWP8.Resources.AppResources.LectureApp_Course` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.

5.2.2.27 `string CampusAppWP8.Resources.AppResources.LectureApp_Courses` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Studiengänge ähnelt.

5.2.2.28 `string CampusAppWP8.Resources.AppResources.LectureApp_Degree` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.

5.2.2.29 `string CampusAppWP8.Resources.AppResources.LectureApp_Department` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Lehrstuhl ähnelt.

5.2.2.30 `string CampusAppWP8.Resources.AppResources.LectureApp_DetailsHeader` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Vorlesungen - Details ähnelt.

5.2.2.31 `string CampusAppWP8.Resources.AppResources.LectureApp_LectureName` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Veranstaltungsname ähnelt.

5.2.2.32 `string CampusAppWP8.Resources.AppResources.LectureApp_LectureTopic` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Lehrinhalt ähnelt.

5.2.2.33 `string CampusAppWP8.Resources.AppResources.LectureApp_Officer` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Verantwortlicher ähnelt.

5.2.2.34 `string CampusAppWP8.Resources.AppResources.LectureApp_Semester` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.

5.2.2.35 `string CampusAppWP8.Resources.AppResources.LectureApp_Term` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Fachsemester ähnelt.

5.2.2.36 `string CampusAppWP8.Resources.AppResources.LectureApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Vorlesungen ähnelt.

5.2.2.37 `string CampusAppWP8.Resources.AppResources.LectureApp_Type` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Veranstaltungsart ähnelt.

5.2.2.38 `string CampusAppWP8.Resources.AppResources.LinkApp_ClubLinks` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die stud. Vereine ähnelt.

5.2.2.39 `string CampusAppWP8.Resources.AppResources.LinkApp_CommonLinks` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die allg. Links ähnelt.

5.2.2.40 `string CampusAppWP8.Resources.AppResources.LinkApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Links ähnelt.

5.2.2.41 `string CampusAppWP8.Resources.AppResources.ListPickerHeaderCampus` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Campusauswahl ähnelt.

5.2.2.42 `string CampusAppWP8.Resources.AppResources.ListPickerHeaderCourse` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Studiengangsauswahl ähnelt.

5.2.2.43 `string CampusAppWP8.Resources.AppResources.ListPickerHeaderDegree` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Abschlussauswahl ähnelt.

5.2.2.44 `string CampusAppWP8.Resources.AppResources.ListPickerHeaderRole` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Rollenauswahl ähnelt.

5.2.2.45 `string CampusAppWP8.Resources.AppResources.ListPickerHeaderSemester` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Semesterauswahl ähnelt.

5.2.2.46 `string CampusAppWP8.Resources.AppResources.MailApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Webmail ähnelt.

5.2.2.47 `string CampusAppWP8.Resources.AppResources.MensaApp_Action` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Aktion ähnelt.

5.2.2.48 `string CampusAppWP8.Resources.AppResources.MensaApp_Bio` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Bio ähnelt.

5.2.2.49 `string CampusAppWP8.Resources.AppResources.MensaApp_Dinner1` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Essen 1 ähnelt.

5.2.2.50 `string CampusAppWP8.Resources.AppResources.MensaApp_Dinner2` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Essen 2 ähnelt.

5.2.2.51 `string CampusAppWP8.Resources.AppResources.MensaApp_Dinner3` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Essen 3 ähnelt.

5.2.2.52 `string CampusAppWP8.Resources.AppResources.MensaApp_Dinner4` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Essen 4 ähnelt.

5.2.2.53 `string CampusAppWP8.Resources.AppResources.MensaApp_Dinner5` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Essen 5 ähnelt.

5.2.2.54 `string CampusAppWP8.Resources.AppResources.MensaApp_DinnerLabelW` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die 84 ähnelt.

5.2.2.55 `string CampusAppWP8.Resources.AppResources.MensaApp_NotToday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Heute nicht im Angebot ähnelt.

5.2.2.56 `string CampusAppWP8.Resources.AppResources.MensaApp_Soup` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Suppe ähnelt.

5.2.2.57 `string CampusAppWP8.Resources.AppResources.MensaApp_Title` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Mensaplan ähnelt.

5.2.2.58 `string CampusAppWP8.Resources.AppResources.MsgBox_ErrorCampusLoc` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Der aktuelle Campus konnte nicht ermittelt werden. Es wird der im Profil festgelegten Campus verwendet. ähnelt.

5.2.2.59 `string CampusAppWP8.Resources.AppResources.MsgBox_ErrorHeader` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Fehler ähnelt.

5.2.2.60 `string CampusAppWP8.Resources.AppResources.MsgBox_ErrorMainModelLoad` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Beim Laden des Inhaltes ist ein Fehler aufgetreten ähnelt.

5.2.2.61 `string CampusAppWP8.Resources.AppResources.MsgBox_ErrorMainModelLoadFile` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Datei konnte nicht geladen werden ähnelt.

5.2.2.62 `string CampusAppWP8.Resources.AppResources.MsgBox_ErrorMainModelLoadWeb` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Es konnte kein neuer Inhalt aus den Web geladen werden ähnelt.

5.2.2.63 `string CampusAppWP8.Resources.AppResources.MsgBox_GeoWatchOptInHeader` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Ortung ähnelt.

5.2.2.64 `string CampusAppWP8.Resources.AppResources.MsgBox_GeoWatchOptInText` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Dürfen Positionsdaten erhoben und verwendet werden? ähnelt.

5.2.2.65 `string CampusAppWP8.Resources.AppResources.NewsApp_Title` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die News ähnelt.

5.2.2.66 `string CampusAppWP8.Resources.AppResources.NewsHomeBtn` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die zur Übersicht ähnelt.

5.2.2.67 `string CampusAppWP8.Resources.AppResources.NewsLinkBtn` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Link ähnelt.

5.2.2.68 `string CampusAppWP8.Resources.AppResources.OpenHoursApp_Title` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Öffnungszeiten ähnelt.

5.2.2.69 `string CampusAppWP8.Resources.AppResources.OpenHoursApp_Title2` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Öffnungs- zeiten ähnelt.

5.2.2.70 `string CampusAppWP8.Resources.AppResources.OSAApp_Title` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Fachschaften ähnelt.

5.2.2.71 `string CampusAppWP8.Resources.AppResources.Professorship_chairs` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Lehrstühle ähnelt.

5.2.2.72 `string CampusAppWP8.Resources.AppResources.ResourceFlowDirection` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die LeftToRight ähnelt.

5.2.2.73 `string CampusAppWP8.Resources.AppResources.ResourceLanguage` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die de-de ähnelt.

5.2.2.74 `global.System.Resources.ResourceManager CampusAppWP8.Resources.AppResources.ResourceManager`
[static],[get]

Gibt die zwischengespeicherte ResourceManager-Instanz zurück, die von dieser Klasse verwendet wird.

5.2.2.75 `string CampusAppWP8.Resources.AppResources.Room` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Raum ähnelt.

5.2.2.76 `string CampusAppWP8.Resources.AppResources.SampleProperty` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Beispielwert für die Laufzeiteigenschaft ähnelt.

5.2.2.77 `string CampusAppWP8.Resources.AppResources.Setting_App` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Appereinstellungen ähnelt.

5.2.2.78 `string CampusAppWP8.Resources.AppResources.Setting_AppGeoWatch` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Ortung ähnelt.

5.2.2.79 `string CampusAppWP8.Resources.AppResources.Setting_AplAppBarTitle` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Appereinstellungen ähnelt.

5.2.2.80 `string CampusAppWP8.Resources.AppResources.Setting_RoleStaff` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Mitarbeiter ähnelt.

5.2.2.81 `string CampusAppWP8.Resources.AppResources.Setting_RoleStudent` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Student ähnelt.

5.2.2.82 `string CampusAppWP8.Resources.AppResources.Setting_User` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Profileinstellungen ähnelt.

5.2.2.83 `string CampusAppWP8.Resources.AppResources.Setting_UserCampus` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Campus ähnelt.

5.2.2.84 `string CampusAppWP8.Resources.AppResources.Setting_UserCourse` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.

5.2.2.85 `string CampusAppWP8.Resources.AppResources.Setting_UserDegree` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.

5.2.2.86 `string CampusAppWP8.Resources.AppResources.Setting_UserProfilAppBarTitle` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Profileinstellungen ähnelt.

5.2.2.87 `string CampusAppWP8.Resources.AppResources.Setting_UserRole` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Rolle ähnelt.

5.2.2.88 `string CampusAppWP8.Resources.AppResources.Setting_UserSemester` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.

5.2.2.89 `string CampusAppWP8.Resources.AppResources.Time_Day_Friday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Freitag ähnelt.

5.2.2.90 `string CampusAppWP8.Resources.AppResources.Time_Day_Monday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Montag ähnelt.

5.2.2.91 `string CampusAppWP8.Resources.AppResources.Time_Day_Saturday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Samstag ähnelt.

5.2.2.92 `string CampusAppWP8.Resources.AppResources.Time_Day_Sunday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Sonntag ähnelt.

5.2.2.93 `string CampusAppWP8.Resources.AppResources.Time_Day_Thursday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Donnerstag ähnelt.

5.2.2.94 `string CampusAppWP8.Resources.AppResources.Time_Day_Tuesday` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die Dienstag ähnelt.

5.2.2.95 `string CampusAppWP8.Resources.AppResources.Time_Day_Wednesday` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Mittwoch ähnelt.

5.2.2.96 `string CampusAppWP8.Resources.AppResources.TimeTableApp_Title` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Stundenplan ähnelt.

5.2.2.97 `string CampusAppWP8.Resources.AppResources.UpdateBtn` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Aktualisieren ähnelt.

5.2.2.98 `string CampusAppWP8.Resources.AppResources.WelcomeString` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Willkommen zur BTU-CampusApp WP8 ähnelt.


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Resources/AppResources.-Designer.cs`

5.3 CampusAppWP8.Pages.Setting.AppSettingPage Class Reference

Class for the [AppSettingPage](#)

Inheritance diagram for `CampusAppWP8.Pages.Setting.AppSettingPage`:



Public Member Functions

- [AppSettingPage](#) ()
Initializes a new instance of the [AppSettingPage](#) class.

Protected Member Functions

- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the [OnNavigatedFrom](#) method

5.3.1 Detailed Description

Class for the [AppSettingPage](#)

5.3.2 Constructor & Destructor Documentation

5.3.2.1 CampusAppWP8.Pages.Setting.AppSettingsPage.AppSettingsPage ()

Initializes a new instance of the [AppSettingPage](#) class.

5.3.3 Member Function Documentation

5.3.3.1 override void CampusAppWP8.Pages.Setting.AppSettingsPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Setting/AppSettingPage.xaml.cs

5.4 CampusAppWP8.Model.Setting.AppSettings Class Reference

[Model](#) for settings of the app

Properties

- bool [GeoWatchEnable](#) [get, set]
Gets or sets a value indicating whether the GeoWatch-Flag
- bool [InitApp](#) [get, set]
Gets or sets a value indicating whether the InitializationApp-Flag

5.4.1 Detailed Description

[Model](#) for settings of the app

5.4.2 Property Documentation

5.4.2.1 bool CampusAppWP8.Model.Setting.AppSettings.GeoWatchEnable [get], [set]

Gets or sets a value indicating whether the GeoWatch-Flag

5.4.2.2 bool CampusAppWP8.Model.Setting.AppSettings.InitApp [get], [set]

Gets or sets a value indicating whether the InitializationApp-Flag


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Setting/AppSettings.-cs

5.5 CampusAppWP8.Model.Utility.CampusListPickerItemListModel Class Reference

This Class creates a list of degrees

Inheritance diagram for CampusAppWP8.Model.Utility.CampusListPickerItemListModel:



Public Member Functions

- [CampusListPickerItemListModel \(\)](#)
Initializes a new instance of the [DegreeListPickerItemListModel](#) class.

Protected Member Functions

- override void [LoadList \(\)](#)
Overrides the LoadList-Method [ListPickerItemListModel](#)

Additional Inherited Members

5.5.1 Detailed Description

This Class creates a list of degrees

5.5.2 Constructor & Destructor Documentation

5.5.2.1 CampusAppWP8.Model.Utility.CampusListPickerItemListModel.CampusListPickerItemListModel ()

Initializes a new instance of the [DegreeListPickerItemListModel](#) class.

5.5.3 Member Function Documentation

5.5.3.1 override void CampusAppWP8.Model.Utility.CampusListPickerItemListModel.LoadList () [protected], [virtual]

Overrides the LoadList-Method [ListPickerItemListModel](#)

Reimplemented from [CampusAppWP8.Model.Utility.ListPickerItemListModel](#).


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/CampusList-PickerItemListModel.cs

5.6 CampusAppWP8.Pages.Campusmap.CampusMapPage Class Reference

Class for the campusMap page

Inheritance diagram for CampusAppWP8.Pages.Campusmap.CampusMapPage:



Public Member Functions

- [CampusMapPage](#) ()
Initializes a new instance of the [CampusMapPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Methods overrides the OnNavigatedTo-Method

5.6.1 Detailed Description

Class for the campusMap page

5.6.2 Constructor & Destructor Documentation

5.6.2.1 CampusAppWP8.Pages.Campusmap.CampusMapPage.CampusMapPage ()

Initializes a new instance of the [CampusMapPage](#) class.

5.6.3 Member Function Documentation

5.6.3.1 override void CampusAppWP8.Pages.Campusmap.CampusMapPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Methods overrides the OnNavigatedTo-Method

Parameters

<i>e</i>	some NavigationEventArgs
----------	--------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Campusmap/Campus-MapPage.xaml.cs

5.7 CampusAppWP8.Feed.GeoApi.CampusSpsApi Class Reference

Class for SPSAPI

Inheritance diagram for CampusAppWP8.Feed.GeoApi.CampusSpsApi:

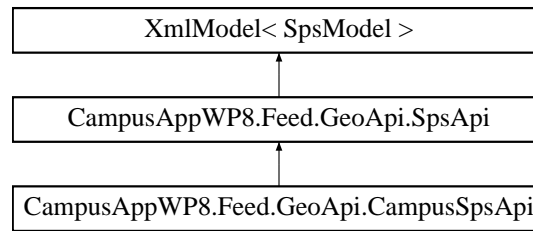

Public Member Functions

- [CampusSpsApi \(\)](#)
Initializes a new instance of the [CampusSpsApi](#) class.
- void [SetupCampusRequest](#) (string lat, string log)
Method set the UriParameter of a campusRequest for a given latitude and longitude
- void [SetupCurrentCampusRequest](#) ()
Method set the UriParameter of a campusRequest for the actualPosition
- [CampusAppWP8.Model.Setting.UserProfilModel.Campus GetCampus](#) ()
Method return the campus of the placeList

5.7.1 Detailed Description

Class for SPSAPI

5.7.2 Constructor & Destructor Documentation

5.7.2.1 CampusAppWP8.Feed.GeoApi.CampusSpsApi.CampusSpsApi ()

Initializes a new instance of the [CampusSpsApi](#) class.

5.7.3 Member Function Documentation

5.7.3.1 CampusAppWP8.Model.Setting.UserProfilModel.Campus CampusAppWP8.Feed.GeoApi.CampusSpsApi.-GetCampus ()

Method return the campus of the placeList

Returns

actual campus

5.7.3.2 void CampusAppWP8.Feed.GeoApi.CampusSpsApi.SetupCampusRequest (string lat, string log)

Method set the UriParameter of a campusRequest for a given latitude and longitude

Parameters

<i>lat</i>	latitude parameter
<i>log</i>	longitude parameter

5.7.3.3 void CampusAppWP8.Feed.GeoApi.CampusSpsApi.SetupCurrentCampusRequest ()

Method set the UriParameter of a campusRequest for the actualPosition


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Api/GeoApi/CampusSps-Api.cs

5.8 CampusAppWP8.Model.Campusmap.CBMainMapModel Class Reference

Class for the [MapModel](#) of the mainCampus of cottbus

Inheritance diagram for CampusAppWP8.Model.Campusmap.CBMainMapModel:



Public Member Functions

- [CBMainMapModel](#) ()
Initializes a new instance of the [CBMainMapModel](#) class.

Additional Inherited Members

5.8.1 Detailed Description

Class for the [MapModel](#) of the mainCampus of cottbus

5.8.2 Constructor & Destructor Documentation

5.8.2.1 CampusAppWP8.Model.Campusmap.CBMainMapModel.CBMainMapModel ()

Initializes a new instance of the [CBMainMapModel](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Campusmap/CB-MainMapModel.cs

5.9 CampusAppWP8.Model.Departments.ChairModel Class Reference

Class to hold information about a professorship chair.

Public Member Functions

- [ChairModel](#) ()
Initializes a new instance of the [ChairModel](#) class.

- [ChairModel](#) (string name)
Initializes a new instance of the [ChairModel](#) class.

Properties

- string [NameDE](#) [get, set]
Gets or sets the german name of the chair.
- string [NameEN](#) [get, set]
Gets or sets the english name of the chair.
- string [Url](#) [get, set]
Gets or sets the url of the chair homepage.
- string [Name](#) [get]
Gets the localized name of the chair.

5.9.1 Detailed Description

Class to hold information about a professorship chair.

5.9.2 Constructor & Destructor Documentation

5.9.2.1 CampusAppWP8.Model.Departments.ChairModel.ChairModel ()

Initializes a new instance of the [ChairModel](#) class.

5.9.2.2 CampusAppWP8.Model.Departments.ChairModel.ChairModel (string name)

Initializes a new instance of the [ChairModel](#) class.

Parameters

<i>name</i>	name of the chair
-------------	-------------------

5.9.3 Property Documentation

5.9.3.1 string CampusAppWP8.Model.Departments.ChairModel.Name [get]

Gets the localized name of the chair.

5.9.3.2 string CampusAppWP8.Model.Departments.ChairModel.NameDE [get], [set]

Gets or sets the german name of the chair.

5.9.3.3 string CampusAppWP8.Model.Departments.ChairModel.NameEN [get], [set]

Gets or sets the english name of the chair.

5.9.3.4 string CampusAppWP8.Model.Departments.ChairModel.Url [get], [set]

Gets or sets the url of the chair homepage.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Departments/Chair-Model.cs

5.10 CampusAppWP8.Model.Utility.CleanUrlParamModel Class Reference

This class is a [Model](#) for the URLParameter like GET-Parameter

Inheritance diagram for CampusAppWP8.Model.Utility.CleanUrlParamModel:



Public Member Functions

- [CleanUrlParamModel](#) (string [key](#))
Initializes a new instance of the [UriParamModel](#) class.
- [CleanUrlParamModel](#) (string [key](#), string value)
Initializes a new instance of the [UriParamModel](#) class.
- override string [ToString](#) ()
Method return a formatted string like Key=Value

Properties

- override string [ParamToken](#) [get]
Gets the token, which indicate that the parameterList started

Additional Inherited Members

5.10.1 Detailed Description

This class is a [Model](#) for the URLParameter like GET-Parameter

5.10.2 Constructor & Destructor Documentation

5.10.2.1 CampusAppWP8.Model.Utility.CleanUrlParamModel.CleanUrlParamModel (string [key](#))

Initializes a new instance of the [UriParamModel](#) class.

Parameters

key	the key for the parameter
---------------------	---------------------------

5.10.2.2 CampusAppWP8.Model.Utility.CleanUrlParamModel.CleanUrlParamModel (string [key](#), string [value](#))

Initializes a new instance of the [UriParamModel](#) class.

Parameters

<i>key</i>	the key for the parameter
------------	---------------------------

>

Parameters

<i>value</i>	value of the parameter
--------------	------------------------

5.10.3 Member Function Documentation

5.10.3.1 override string CampusAppWP8.Model.Utility.CleanUrlParamModel.ToString ()

Method return a formatted string like Key=Value

Returns

return formatted string

5.10.4 Property Documentation

5.10.4.1 override string CampusAppWP8.Model.Utility.CleanUrlParamModel.ParamToken [get]

Gets the token, which indicate that the parameterList started


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/CleanUrlParamModel.cs

5.11 CampusAppWP8.Feed.Link.ClubLinkFeed Class Reference

This Class is for ClubLinkFeeds

Inheritance diagram for CampusAppWP8.Feed.Link.ClubLinkFeed:



Public Member Functions

- [ClubLinkFeed \(\)](#)

Initializes a new instance of the [ClubLinkFeed](#) class.

5.11.1 Detailed Description

This Class is for ClubLinkFeeds

5.11.2 Constructor & Destructor Documentation

5.11.2.1 CampusAppWP8.Feed.Link.ClubLinkFeed.ClubLinkFeed ()

Initializes a new instance of the [ClubLinkFeed](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Link/ClubLinkFeed.cs

5.12 CampusAppWP8.Feed.Link.CommonLinkFeed Class Reference

This Class is for CommonLinkFeeds

Inheritance diagram for CampusAppWP8.Feed.Link.CommonLinkFeed:



Public Member Functions

- [CommonLinkFeed](#) ()
Initializes a new instance of the [CommonLinkFeed](#) class.

5.12.1 Detailed Description

This Class is for CommonLinkFeeds

5.12.2 Constructor & Destructor Documentation

5.12.2.1 CampusAppWP8.Feed.Link.CommonLinkFeed.CommonLinkFeed ()

Initializes a new instance of the [CommonLinkFeed](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Link/CommonLinkFeed.cs

5.13 CampusAppWP8.Const Class Reference

Access to Constants.rex

Properties

- [Constants Constants](#) [get]
Gets the resource object.

5.13.1 Detailed Description

Access to Constants.rex

5.13.2 Property Documentation

5.13.2.1 Constants CampusAppWP8.Const.Constants [get]

Gets the resource object.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Const.cs

5.14 CampusAppWP8.Resources.Constants Class Reference

Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.

Properties

- static
global::System.Resources.ResourceManager [ResourceManager](#) [get]
Gibt die zwischengespeicherte ResourceManager-Instanz zurück, die von dieser Klasse verwendet wird.
- static
global::System.Globalization.CultureInfo [Culture](#) [get, set]
Überschreibt die CurrentUICulture-Eigenschaft des aktuellen Threads für alle Ressourcenzuordnungen, die diese stark typisierte Ressourcenklasse verwenden.
- static string [AppSetting_GeoWatchEnable](#) [get]
Sucht eine lokalisierte Zeichenfolge, die AppSetting.GeoWatchEnable ähnelt.
- static string [AppSetting_InitApp](#) [get]
Sucht eine lokalisierte Zeichenfolge, die AppSetting.InitApp ähnelt.
- static string [FileDepartment_Favorite_Name](#) [get]
Sucht eine lokalisierte Zeichenfolge, die DepartmentFavoriteFeed.xml ähnelt.
- static string [FileDepartment_Name](#) [get]
Sucht eine lokalisierte Zeichenfolge, die DepartmentFeed.xml ähnelt.
- static string [FileEvents_Name](#) [get]
Sucht eine lokalisierte Zeichenfolge, die EventsFeed.xml ähnelt.
- static string [FileLink_ClubLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die ClubLinks.xml ähnelt.
- static string [FileLink_CommonLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die CommonLinks.xml ähnelt.
- static string [FileMensa_Shedule](#) [get]
Sucht eine lokalisierte Zeichenfolge, die MensaFeed.xml ähnelt.
- static string [FileMensa_Shedule_CBMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBMain.xml ähnelt.
- static string [FileMensa_Shedule_CBNorth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBMain.xml ähnelt.
- static string [FileMensa_Shedule_CBSouth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBSouth.xml ähnelt.
- static string [FileMensa_Shedule_SBFMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die MensaFeed_SFBMain.xml ähnelt.

- static string [FileNews_Name](#) [get]
Sucht eine lokalisierte Zeichenfolge, die NewsFeed.xml ähnelt.
- static string [FileOpeningHours_OpeningHours](#) [get]
Sucht eine lokalisierte Zeichenfolge, die OpeninghoursFeed.xml ähnelt.
- static string [FileProfil_User](#) [get]
Sucht eine lokalisierte Zeichenfolge, die user.xml ähnelt.
- static string [FileStudentCouncil_StudentCouncils](#) [get]
Sucht eine lokalisierte Zeichenfolge, die StudentCouncils.xml ähnelt.
- static string [GeoWatch_CurrentPosition_Lat](#) [get]
Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Lat ähnelt.
- static string [GeoWatch_CurrentPosition_Long](#) [get]
Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Long ähnelt.
- static string [GeoWatch_CurrentPosition_Time](#) [get]
Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Time ähnelt.
- static string [IsolatedStorage_DepartmentFavoriteModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_DepartmentFavoriteModel ähnelt.
- static string [IsolatedStorage_DepartmentModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_DepartmentModel ähnelt.
- static string [IsolatedStorage_EventRSSModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_EventRSSModel ähnelt.
- static string [IsolatedStorage_LectureModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die LectureModel ähnelt.
- static string [IsolatedStorage_LecturePageModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_LecturePageModel ähnelt.
- static string [IsolatedStorage_NewsRSSModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_NewsRSSModel ähnelt.
- static string [IsolatedStorage_OpeninghoursModel](#) [get]
Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_OpeninghoursModel ähnelt.
- static string [LectureXmlValidRootName](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Isf_auszug ähnelt.
- static string [MeallconName_Cow](#) [get]
Sucht eine lokalisierte Zeichenfolge, die RIND ähnelt.
- static string [MeallconName_CowPig](#) [get]
Sucht eine lokalisierte Zeichenfolge, die RINDSCHWEIN ähnelt.
- static string [MeallconName_Fish](#) [get]
Sucht eine lokalisierte Zeichenfolge, die FISCH ähnelt.
- static string [MeallconName_Fowl](#) [get]
Sucht eine lokalisierte Zeichenfolge, die GEFL ähnelt.
- static string [MeallconName_Free](#) [get]
Sucht eine lokalisierte Zeichenfolge, die FREI ähnelt.
- static string [MeallconName_Lamb](#) [get]
Sucht eine lokalisierte Zeichenfolge, die LAMM ähnelt.
- static string [MeallconName_Pig](#) [get]
Sucht eine lokalisierte Zeichenfolge, die SCHWEIN ähnelt.
- static string [MeallconName_Vegetarian](#) [get]
Sucht eine lokalisierte Zeichenfolge, die CAROTTE ähnelt.
- static string [MeallconName_Wild](#) [get]
Sucht eine lokalisierte Zeichenfolge, die WILD ähnelt.
- static string [ParamGetLecture_Course](#) [get]
Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.
- static string [ParamGetLecture_Degree](#) [get]

- Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.*

 - static string [ParamGetLecture_From](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Von ähnelt.*

 - static string [ParamGetLecture_Semester](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.*

 - static string [ParamGetLecture_To](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Bis ähnelt.*

 - static string [ParamModelLecture_ActivityId](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die ActivityId ähnelt.*

 - static string [ParamModelLecture_ModulNumber](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die ModulNumber ähnelt.*

 - static string [ParamPivotIndex](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die pivotindex ähnelt.*

 - static string [ParamUrl](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die Url ähnelt.*

 - static string [PathCampusmap_Campusmap](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Campusmap/CampusMapPage.xaml ähnelt.*

 - static string [PathDepartment_DepartmentFavoritePage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentFavoritePage.xaml ähnelt.*

 - static string [PathDepartment_DepartmentIndexPathPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentIndexPathPage.xaml ähnelt.*

 - static string [PathDepartment_DepartmentInfoPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentInfoPage.xaml ähnelt.*

 - static string [PathDepartment_DepartmentPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentPage.xaml ähnelt.*

 - static string [PathEvent_EventPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Events/EventPage.xaml ähnelt.*

 - static string [PathEvents_EventsIndexPathPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Events/EventIndexPathPage.xaml ähnelt.*

 - static string [PathLecture_LecturePage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Lecture/LecturePage.xaml ähnelt.*

 - static string [PathLecture_ModulWebPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Lecture/ModulWebPage.xaml ähnelt.*

 - static string [PathLecture_ResultDetailPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Lecture/ResultDetailPage.xaml ähnelt.*

 - static string [PathLecture_ResultPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Lecture/ResultPage.xaml ähnelt.*

 - static string [PathLinks_LinkPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Links/LinkPage.xaml ähnelt.*

 - static string [PathMail_WebMailPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Webmail/WebmailPage.xaml ähnelt.*

 - static string [PathMensa_MensaPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Mensa/MensaPage.xaml ähnelt.*

 - static string [PathNews_NewsIndexPathPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/News/NewsIndexPathPage.xaml ähnelt.*

 - static string [PathNews_NewsPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/News/NewsPage.xaml ähnelt.*

 - static string [PathOpeninghours_OpeninghoursPage](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Openinghours/OpeninghoursPage.xaml ähnelt.*

 - static string [PathSetting_App](#) [get]
- Sucht eine lokalisierte Zeichenfolge, die /Pages/Setting/AppSettingPage.xaml ähnelt.*

- static string [PathSetting_User](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `/Pages/Setting/UserProfil.xaml` ähnelt.
- static string [PathStudentCouncil_StudentCouncilPage](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `/Pages/StudentCouncil/StudentCouncilPage.xaml` ähnelt.
- static string [Setting_DefaultCourseNumber](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `767` ähnelt.
- static string [Setting_DefaultSemester](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `20131` ähnelt.
- static string [SpsApi_CampusDomain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `3` ähnelt.
- static string [SpsApi_DomainParaKey](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `domain` ähnelt.
- static string [SpsApi_LatitudeParaKey](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `latitude` ähnelt.
- static string [SpsApi_LongitudeParaKey](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `longitude` ähnelt.
- static string [ToggleContent](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `ToggleContent` ähnelt.
- static string [UrlDepartment_Addr](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/professorships.-xml` ähnelt.
- static string [UrlEvents_Addr](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/oracle-gateway/php/rss2feed-_veranstaltungen.php` ähnelt.
- static string [UrlLecture_ApiBaseAddr](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.zv.tu-cottbus.de/LSFveranst/LSF4` ähnelt.
- static string [UrlLecture_ModulBaseAddr](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `https://www.tu-cottbus.de/modul/` ähnelt.
- static string [UrlLink_ClubLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=clubs&app=2&appversion=1` ähnelt.
- static string [UrlLink_CommonLinks](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=links&app=2&appversion=1` ähnelt.
- static string [UrlMensa_Week](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1` ähnelt.
- static string [UrlMensa_Week_CBMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1` ähnelt.
- static string [UrlMensa_Week_CBNorth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1` ähnelt.
- static string [UrlMensa_Week_CBSouth](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusHL&v=1` ähnelt.
- static string [UrlMensa_Week_SBFMain](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=Senftenberg&v=1` ähnelt.
- static string [UrlNews_Addr](#) [get]
Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/oracle-gateway/php/rss2feed-_aktuelles.php` ähnelt.
- static string [UrlOpeningHours_OpeningHours](#) [get]

- Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=openinghours&app=2&appversion=1> ähnelt.*
- static string `UrlSpsService` [get]
 - Sucht eine lokalisierte Zeichenfolge, die <http://141.43.76.140/service/sps> ähnelt.*
- static string `UrlStudentCouncil_StudentCouncils` [get]
 - Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=studentcouncils&app=2&appversion=1> ähnelt.*
- static string `UrlWebMail_Addr` [get]
 - Sucht eine lokalisierte Zeichenfolge, die <https://webmail.tu-cottbus.de> ähnelt.*
- static string `UserSettings_Course` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `UserSettings.Course` ähnelt.*
- static string `UserSettings_DefaultCampus` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `UserSettings.DefaultCampus` ähnelt.*
- static string `UserSettings_Degree` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `UserSettings.Degree` ähnelt.*
- static string `UserSettings_Role` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `UserSettings.Role` ähnelt.*
- static string `UserSettings_Semester` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `UserSettings.Semester` ähnelt.*
- static string `Valid_FirstSemseter` [get]
 - Sucht eine lokalisierte Zeichenfolge, die 20121 ähnelt.*
- static string `Valid_LastSemseter` [get]
 - Sucht eine lokalisierte Zeichenfolge, die 20502 ähnelt.*
- static string `Valid_MaxCourseNumber` [get]
 - Sucht eine lokalisierte Zeichenfolge, die 999 ähnelt.*
- static string `XMLRootElementName` [get]
 - Sucht eine lokalisierte Zeichenfolge, die `root` ähnelt.*

5.14.1 Detailed Description

Eine stark typisierte Ressourcenklasse zum Suchen von lokalisierten Zeichenfolgen usw.

5.14.2 Property Documentation

5.14.2.1 `string CampusAppWP8.Resources.Constants.AppSetting_GeoWatchEnable` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die `AppSetting.GeoWatchEnable` ähnelt.

5.14.2.2 `string CampusAppWP8.Resources.Constants.AppSetting_InitApp` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die `AppSetting.InitApp` ähnelt.

5.14.2.3 `global.System.Globalization.CultureInfo CampusAppWP8.Resources.Constants.Culture` [static],[get],[set]

Überschreibt die `CurrentUICulture`-Eigenschaft des aktuellen Threads für alle Ressourcenzuordnungen, die diese stark typisierte Ressourcenklasse verwenden.

5.14.2.4 `string CampusAppWP8.Resources.Constants.FileDepartment_Favorite_Name` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die `DepartmentFavoriteFeed.xml` ähnelt.

5.14.2.5 `string CampusAppWP8.Resources.Constants.FileDepartment_Name` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die DepartmentFeed.xml ähnelt.

5.14.2.6 `string CampusAppWP8.Resources.Constants.FileEvents_Name` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die EventsFeed.xml ähnelt.

5.14.2.7 `string CampusAppWP8.Resources.Constants.FileLink_ClubLinks` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die ClubLinks.xml ähnelt.

5.14.2.8 `string CampusAppWP8.Resources.Constants.FileLink_CommonLinks` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die CommonLinks.xml ähnelt.

5.14.2.9 `string CampusAppWP8.Resources.Constants.FileMensa_Shedule` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die MensaFeed.xml ähnelt.

5.14.2.10 `string CampusAppWP8.Resources.Constants.FileMensa_Shedule_CBMain` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBMain.xml ähnelt.

5.14.2.11 `string CampusAppWP8.Resources.Constants.FileMensa_Shedule_CBNorth` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBMain.xml ähnelt.

5.14.2.12 `string CampusAppWP8.Resources.Constants.FileMensa_Shedule_CBSouth` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die MensaFeed_CBSouth.xml ähnelt.

5.14.2.13 `string CampusAppWP8.Resources.Constants.FileMensa_Shedule_SBFMain` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die MensaFeed_SFBMain.xml ähnelt.

5.14.2.14 `string CampusAppWP8.Resources.Constants.FileNews_Name` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die NewsFeed.xml ähnelt.

5.14.2.15 `string CampusAppWP8.Resources.Constants.FileOpeningHours_OpeningHours` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die OpeninghoursFeed.xml ähnelt.

5.14.2.16 `string CampusAppWP8.Resources.Constants.FileProfil_User` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die user.xml ähnelt.

5.14.2.17 `string CampusAppWP8.Resources.Constants.FileStudentCouncil_StudentCouncils` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die StudentCouncils.xml ähnelt.

5.14.2.18 `string CampusAppWP8.Resources.Constants.GeoWatch_CurrentPosition_Lat` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Lat ähnelt.

5.14.2.19 `string CampusAppWP8.Resources.Constants.GeoWatch_CurrentPosition_Long` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Long ähnelt.

5.14.2.20 `string CampusAppWP8.Resources.Constants.GeoWatch_CurrentPosition_Time` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die CurrentPosition.Time ähnelt.

5.14.2.21 `string CampusAppWP8.Resources.Constants.IsolatedStorage_DepartmentFavoriteModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_DepartmentFavoriteModel ähnelt.

5.14.2.22 `string CampusAppWP8.Resources.Constants.IsolatedStorage_DepartmentModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_DepartmentModel ähnelt.

5.14.2.23 `string CampusAppWP8.Resources.Constants.IsolatedStorage_EventRSSModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_EventRSSModel ähnelt.

5.14.2.24 `string CampusAppWP8.Resources.Constants.IsolatedStorage_LectureModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die LectureModel ähnelt.

5.14.2.25 `string CampusAppWP8.Resources.Constants.IsolatedStorage_LecturePageModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_LecturePageModel ähnelt.

5.14.2.26 `string CampusAppWP8.Resources.Constants.IsolatedStorage_NewsRSSModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_NewsRSSModel ähnelt.

5.14.2.27 `string CampusAppWP8.Resources.Constants.IsolatedStorage_OpeninghoursModel` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die IsolatedStorage_OpeninghoursModel ähnelt.

5.14.2.28 `string CampusAppWP8.Resources.Constants.LectureXmlValidRootName` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die Isf_auszug ähnelt.

5.14.2.29 `string CampusAppWP8.Resources.Constants.MeallconName_Cow` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die RIND ähnelt.

5.14.2.30 `string CampusAppWP8.Resources.Constants.MeallconName_CowPig` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die RINDSCHWEIN ähnelt.

5.14.2.31 `string CampusAppWP8.Resources.Constants.MeallconName_Fish` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die FISCH ähnelt.

5.14.2.32 `string CampusAppWP8.Resources.Constants.MeallconName_Fowl` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die GEFL ähnelt.

5.14.2.33 `string CampusAppWP8.Resources.Constants.MeallconName_Free` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die FREI ähnelt.

5.14.2.34 `string CampusAppWP8.Resources.Constants.MeallconName_Lamb` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die LAMM ähnelt.

5.14.2.35 `string CampusAppWP8.Resources.Constants.MeallconName_Pig` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die SCHWEIN ähnelt.

5.14.2.36 `string CampusAppWP8.Resources.Constants.MeallconName_Vegetarian` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die CAROTTE ähnelt.

5.14.2.37 `string CampusAppWP8.Resources.Constants.MeallconName_Wild` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die WILD ähnelt.

5.14.2.38 `string CampusAppWP8.Resources.Constants.ParamGetLecture_Course` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die Studiengang ähnelt.

5.14.2.39 `string CampusAppWP8.Resources.Constants.ParamGetLecture_Degree` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die Abschluss ähnelt.

5.14.2.40 `string CampusAppWP8.Resources.Constants.ParamGetLecture_From` [static], [get]

Sucht eine lokalisierte Zeichenfolge, die Von ähnelt.

5.14.2.41 `string CampusAppWP8.Resources.Constants.ParamGetLecture_Semester` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die Semester ähnelt.

5.14.2.42 `string CampusAppWP8.Resources.Constants.ParamGetLecture_To` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die Bis ähnelt.

5.14.2.43 `string CampusAppWP8.Resources.Constants.ParamModelLecture_ActivityId` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die ActivityId ähnelt.

5.14.2.44 `string CampusAppWP8.Resources.Constants.ParamModelLecture_ModulNumber` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die ModulNumber ähnelt.

5.14.2.45 `string CampusAppWP8.Resources.Constants.ParamPivotIndex` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die pivotindex ähnelt.

5.14.2.46 `string CampusAppWP8.Resources.Constants.ParamUrl` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die Url ähnelt.

5.14.2.47 `string CampusAppWP8.Resources.Constants.PathCampusmap_Campusmap` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Campusmap/CampusMapPage.xaml ähnelt.

5.14.2.48 `string CampusAppWP8.Resources.Constants.PathDepartment_DepartmentFavoritePage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentFavoritePage.xaml ähnelt.

5.14.2.49 `string CampusAppWP8.Resources.Constants.PathDepartment_DepartmentIndexPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentIndexPage.xaml ähnelt.

5.14.2.50 `string CampusAppWP8.Resources.Constants.PathDepartment_DepartmentInfoPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentInfoPage.xaml ähnelt.

5.14.2.51 `string CampusAppWP8.Resources.Constants.PathDepartment_DepartmentPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Departments/DepartmentPage.xaml ähnelt.

5.14.2.52 `string CampusAppWP8.Resources.Constants.PathEvent_EventPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die /Pages/Events/EventPage.xaml ähnelt.

5.14.2.53 `string CampusAppWP8.Resources.Constants.PathEvents_EventsIndexPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Events/EventIndexPage.xaml` ähnelt.

5.14.2.54 `string CampusAppWP8.Resources.Constants.PathLecture_LecturePage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Lecture/LecturePage.xaml` ähnelt.

5.14.2.55 `string CampusAppWP8.Resources.Constants.PathLecture_ModulWebPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Lecture/ModulWebPage.xaml` ähnelt.

5.14.2.56 `string CampusAppWP8.Resources.Constants.PathLecture_ResultDetailPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Lecture/ResultDetailPage.xaml` ähnelt.

5.14.2.57 `string CampusAppWP8.Resources.Constants.PathLecture_ResultPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Lecture/ResultPage.xaml` ähnelt.

5.14.2.58 `string CampusAppWP8.Resources.Constants.PathLinks_LinkPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Links/LinkPage.xaml` ähnelt.

5.14.2.59 `string CampusAppWP8.Resources.Constants.PathMail_WebMailPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Webmail/WebmailPage.xaml` ähnelt.

5.14.2.60 `string CampusAppWP8.Resources.Constants.PathMensa_MensaPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Mensa/MensaPage.xaml` ähnelt.

5.14.2.61 `string CampusAppWP8.Resources.Constants.PathNews_NewsIndexPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/News/NewsIndexPage.xaml` ähnelt.

5.14.2.62 `string CampusAppWP8.Resources.Constants.PathNews_NewsPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/News/NewsPage.xaml` ähnelt.

5.14.2.63 `string CampusAppWP8.Resources.Constants.PathOpeninghours_OpeninghoursPage` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Openinghours/OpeninghoursPage.xaml` ähnelt.

5.14.2.64 `string CampusAppWP8.Resources.Constants.PathSetting_App` `[static],[get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Setting/AppSettingPage.xaml` ähnelt.

5.14.2.65 `string CampusAppWP8.Resources.Constants.PathSetting_User` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/Setting/UserProfil.xaml` ähnelt.

5.14.2.66 `string CampusAppWP8.Resources.Constants.PathStudentCouncil_StudentCouncilPage` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `/Pages/StudentCouncil/StudentCouncilPage.xaml` ähnelt.

5.14.2.67 `global.System.Resources.ResourceManager CampusAppWP8.Resources.Constants.ResourceManager`
`[static], [get]`

Gibt die zwischengespeicherte `ResourceManager`-Instanz zurück, die von dieser Klasse verwendet wird.

5.14.2.68 `string CampusAppWP8.Resources.Constants.Setting_DefaultCourseNumber` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `767` ähnelt.

5.14.2.69 `string CampusAppWP8.Resources.Constants.Setting_DefaultSemester` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `20131` ähnelt.

5.14.2.70 `string CampusAppWP8.Resources.Constants.SpsApi_CampusDomain` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `3` ähnelt.

5.14.2.71 `string CampusAppWP8.Resources.Constants.SpsApi_DomainParaKey` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `domain` ähnelt.

5.14.2.72 `string CampusAppWP8.Resources.Constants.SpsApi_LatitudeParaKey` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `latitude` ähnelt.

5.14.2.73 `string CampusAppWP8.Resources.Constants.SpsApi_LongitudeParaKey` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `longitude` ähnelt.

5.14.2.74 `string CampusAppWP8.Resources.Constants.ToggleContent` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `ToggleContent` ähnelt.

5.14.2.75 `string CampusAppWP8.Resources.Constants.UrlDepartment_Addr` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/campusapp-data/professorships.xml` ähnelt.

5.14.2.76 `string CampusAppWP8.Resources.Constants.UrlEvents_Addr` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die `http://www.tu-cottbus.de/oracle-gateway/php/rss2feed-_veranstaltungen.php` ähnelt.

5.14.2.77 `string CampusAppWP8.Resources.Constants.UrlLecture_ApiBaseAddr` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.zv.tu-cottbus.de/LSFveranst/LSF4> ähnelt.

5.14.2.78 `string CampusAppWP8.Resources.Constants.UrlLecture_ModulBaseAddr` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <https://www.tu-cottbus.de/modul/> ähnelt.

5.14.2.79 `string CampusAppWP8.Resources.Constants.UrlLink_ClubLinks` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=clubs&app=2&appversion=1> ähnelt.

5.14.2.80 `string CampusAppWP8.Resources.Constants.UrlLink_CommonLinks` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=links&app=2&appversion=1> ähnelt.

5.14.2.81 `string CampusAppWP8.Resources.Constants.UrlMensa_Week` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1> ähnelt.

5.14.2.82 `string CampusAppWP8.Resources.Constants.UrlMensa_Week_CBMain` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1> ähnelt.

5.14.2.83 `string CampusAppWP8.Resources.Constants.UrlMensa_Week_CBNorth` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusBTU&v=1> ähnelt.

5.14.2.84 `string CampusAppWP8.Resources.Constants.UrlMensa_Week_CBSouth` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=CottbusHL&v=1> ähnelt.

5.14.2.85 `string CampusAppWP8.Resources.Constants.UrlMensa_Week_SBFMain` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/Studentenwerk/index.-php?mensa=Senftenberg&v=1> ähnelt.

5.14.2.86 `string CampusAppWP8.Resources.Constants.UrlNews_Addr` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die http://www.tu-cottbus.de/oracle-gateway/php/rss2feed-_aktuelles.php ähnelt.

5.14.2.87 `string CampusAppWP8.Resources.Constants.UrlOpeningHours_OpeningHours` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=openinghours&app=2&appversion=1> ähnelt.

5.14.2.88 `string CampusAppWP8.Resources.Constants.UrlSpsService` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://141.43.76.140/service/sps> ähnelt.

5.14.2.89 `string CampusAppWP8.Resources.Constants.UrlStudentCouncil_StudentCouncils` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <http://www.tu-cottbus.de/campusapp-data/getdata.-php?db=studentcouncils&app=2&appversion=1> ähnelt.

5.14.2.90 `string CampusAppWP8.Resources.Constants.UrlWebMail_Addr` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die <https://webmail.tu-cottbus.de> ähnelt.

5.14.2.91 `string CampusAppWP8.Resources.Constants.UserSettings_Course` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die UserSettings.Course ähnelt.

5.14.2.92 `string CampusAppWP8.Resources.Constants.UserSettings_DefaultCampus` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die UserSettings.DefaultCampus ähnelt.

5.14.2.93 `string CampusAppWP8.Resources.Constants.UserSettings_Degree` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die UserSettings.Degree ähnelt.

5.14.2.94 `string CampusAppWP8.Resources.Constants.UserSettings_Role` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die UserSettings.Role ähnelt.

5.14.2.95 `string CampusAppWP8.Resources.Constants.UserSettings_Semester` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die UserSettings.Semester ähnelt.

5.14.2.96 `string CampusAppWP8.Resources.Constants.Valid_FirstSemseter` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die 20121 ähnelt.

5.14.2.97 `string CampusAppWP8.Resources.Constants.Valid_LastSemseter` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die 20502 ähnelt.

5.14.2.98 `string CampusAppWP8.Resources.Constants.Valid_MaxCourseNumber` [static],[get]

Sucht eine lokalisierte Zeichenfolge, die 999 ähnelt.

5.14.2.99 `string CampusAppWP8.Resources.Constants.XMLRootElementName` `[static], [get]`

Sucht eine lokalisierte Zeichenfolge, die root ähnelt.


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Resources/Constants.-Designer.cs`

5.15 CampusAppWP8.Model.Utility.CourseListPickerItemListModel Class Reference

This is a class for the courseList

Inheritance diagram for `CampusAppWP8.Model.Utility.CourseListPickerItemListModel`:



Public Member Functions

- `CourseListPickerItemListModel ()`
Initializes a new instance of the `CourseListPickerItemListModel` class.

Protected Member Functions

- `override void LoadList ()`
Overrides the LoadList-Method `ListPickerItemListModel`

Additional Inherited Members

5.15.1 Detailed Description

This is a class for the courseList

5.15.2 Constructor & Destructor Documentation

5.15.2.1 `CampusAppWP8.Model.Utility.CourseListPickerItemListModel.CourseListPickerItemListModel ()`

Initializes a new instance of the `CourseListPickerItemListModel` class.

5.15.3 Member Function Documentation

5.15.3.1 `override void CampusAppWP8.Model.Utility.CourseListPickerItemListModel.LoadList ()` `[protected], [virtual]`

Overrides the LoadList-Method `ListPickerItemListModel`

Reimplemented from `CampusAppWP8.Model.Utility.ListPickerItemListModel`.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/CourseList-PickerItemListModel.cs

5.16 CampusAppWP8.Model.Utility.DegreeListPickerItemListModel Class Reference

This Class creates a list of degrees

Inheritance diagram for CampusAppWP8.Model.Utility.DegreeListPickerItemListModel:



Public Member Functions

- [DegreeListPickerItemListModel \(\)](#)
Initializes a new instance of the [DegreeListPickerItemListModel](#) class.

Protected Member Functions

- override void [LoadList \(\)](#)
Overrides the LoadList-Method [ListPickerItemListModel](#)

Additional Inherited Members

5.16.1 Detailed Description

This Class creates a list of degrees

5.16.2 Constructor & Destructor Documentation

5.16.2.1 CampusAppWP8.Model.Utility.DegreeListPickerItemListModel.DegreeListPickerItemListModel ()

Initializes a new instance of the [DegreeListPickerItemListModel](#) class.

5.16.3 Member Function Documentation

5.16.3.1 override void CampusAppWP8.Model.Utility.DegreeListPickerItemListModel.LoadList () [protected], [virtual]

Overrides the LoadList-Method [ListPickerItemListModel](#)

Reimplemented from [CampusAppWP8.Model.Utility.ListPickerItemListModel](#).


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/DegreeList-PickerItemListModel.cs

5.17 CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed Class Reference

[Feed](#) object to handle favorite department feeds.

Inheritance diagram for CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed:



Public Member Functions

- [DepartmentFavoriteFeed](#) (bool autoLoad=true)
Initializes a new instance of the [DepartmentFavoriteFeed](#) class.

5.17.1 Detailed Description

[Feed](#) object to handle favorite department feeds.

5.17.2 Constructor & Destructor Documentation

5.17.2.1 CampusAppWP8.Feed.Departments.DepartmentFavoriteFeed.DepartmentFavoriteFeed (bool autoLoad = true)

Initializes a new instance of the [DepartmentFavoriteFeed](#) class.

Parameters

<i>autoLoad</i>	automatic loading of the data
-----------------	-------------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Departments/Department-FavoriteFeed.cs

5.18 CampusAppWP8.Pages.Departments.DepartmentFavoritePage Class Reference

Page to visualize the favorite department list.

Inheritance diagram for CampusAppWP8.Pages.Departments.DepartmentFavoritePage:



Public Member Functions

- [DepartmentFavoritePage](#) ()
Initializes a new instance of the [DepartmentFavoritePage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page. Initialize the list source.
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom function.

5.18.1 Detailed Description

Page to visualize the favorite department list.

5.18.2 Constructor & Destructor Documentation

5.18.2.1 CampusAppWP8.Pages.Departments.DepartmentFavoritePage.DepartmentFavoritePage ()

Initializes a new instance of the [DepartmentFavoritePage](#) class.

5.18.3 Member Function Documentation

5.18.3.1 override void CampusAppWP8.Pages.Departments.DepartmentFavoritePage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom function.

Parameters

<i>e</i>	event args
----------	------------

5.18.3.2 override void CampusAppWP8.Pages.Departments.DepartmentFavoritePage.OnNavigatedTo (NavigationEventArgs e) [protected]

On navigation to this page. Initialize the list source.

Parameters

<i>e</i>	event args
----------	------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Departments/DepartmentFavoritePage.xaml.cs

5.19 CampusAppWP8.Feed.Departments.DepartmentFeed Class Reference

[Feed](#) class for the department information.

Inheritance diagram for CampusAppWP8.Feed.Departments.DepartmentFeed:



Public Member Functions

- [DepartmentFeed](#) (bool autoLoad=true)
Initializes a new instance of the [DepartmentFeed](#) class.

5.19.1 Detailed Description

[Feed](#) class for the department information.

5.19.2 Constructor & Destructor Documentation

5.19.2.1 CampusAppWP8.Feed.Departments.DepartmentFeed.DepartmentFeed (bool autoLoad = true)

Initializes a new instance of the [DepartmentFeed](#) class.

Parameters

<i>autoLoad</i>	automatic loading of the data
-----------------	-------------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Departments/Department-Feed.cs

5.20 CampusAppWP8.Pages.Departments.DepartmentIndexPage Class Reference

Page with a list of the faculties.

Inheritance diagram for CampusAppWP8.Pages.Departments.DepartmentIndexPage:



Public Member Functions

- [DepartmentIndexPage](#) ()
Initializes a new instance of the [DepartmentIndexPage](#) class.

Static Public Member Functions

- static [DepartmentFeed](#) [GetFeed](#) ()
Return the feed object of the departments.
- static [DepartmentFavoriteFeed](#) [GetFavoriteFeed](#) ()
Return the feed object of the favorite departments.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page. Initialize the feed loading.

- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
On navigation from this page. Store the favorite list.

Properties

- static [DepartmentFeed Feed](#) [get, set]
Gets or sets the feed object.
- static [DepartmentFavoriteFeed FavoriteFeed](#) [get, set]
Gets or sets the favorite feed object.

5.20.1 Detailed Description

Page with a list of the faculties.

5.20.2 Constructor & Destructor Documentation

5.20.2.1 CampusAppWP8.Pages.Departments.DepartmentIndexPage.DepartmentIndexPage ()

Initializes a new instance of the [DepartmentIndexPage](#) class.

5.20.3 Member Function Documentation

5.20.3.1 static [DepartmentFavoriteFeed](#) CampusAppWP8.Pages.Departments.DepartmentIndexPage.GetFavoriteFeed () [static]

Return the feed object of the favorite departments.

Returns

feed object

5.20.3.2 static [DepartmentFeed](#) CampusAppWP8.Pages.Departments.DepartmentIndexPage.GetFeed () [static]

Return the feed object of the departments.

Returns

feed object

5.20.3.3 override void CampusAppWP8.Pages.Departments.DepartmentIndexPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

On navigation from this page. Store the favorite list.

Parameters

<i>e</i>	event args
----------	------------

5.20.3.4 override void CampusAppWP8.Pages.Departments.DepartmentIndexPage.OnNavigatedTo (NavigationEventArgs e) [protected]

On navigation to this page. Initialize the feed loading.

Parameters

<i>e</i>	event args
----------	------------

5.20.4 Property Documentation

5.20.4.1 `DepartmentFavoriteFeed` `CampusAppWP8.Pages.Departments.DepartmentIndexPage.FavoriteFeed` `[static], [get], [set]`

Gets or sets the favorite feed object.

5.20.4.2 `DepartmentFeed` `CampusAppWP8.Pages.Departments.DepartmentIndexPage.Feed` `[static], [get], [set]`

Gets or sets the feed object.


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Departments/DepartmentIndexPage.xaml.cs`

5.21 `CampusAppWP8.Pages.Departments.DepartmentInfoPage` Class Reference

Info page of a chair.

Inheritance diagram for `CampusAppWP8.Pages.Departments.DepartmentInfoPage`:



Public Member Functions

- [DepartmentInfoPage](#) ()
Initializes a new instance of the [DepartmentInfoPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (`NavigationEventArgs e`)
On navigation to this page. Initialize the page headline text.

5.21.1 Detailed Description

Info page of a chair.

5.21.2 Constructor & Destructor Documentation

5.21.2.1 `CampusAppWP8.Pages.Departments.DepartmentInfoPage.DepartmentInfoPage` ()

Initializes a new instance of the [DepartmentInfoPage](#) class.

5.21.3 Member Function Documentation

5.21.3.1 override void CampusAppWP8.Pages.Departments.DepartmentInfoPage.OnNavigatedTo (NavigationEventArgs e) [protected]

On navigation to this page. Initialize the page headline text.

Parameters

e	event args
---	------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Departments/Department-InfoPage.xaml.cs

5.22 CampusAppWP8.Model.Departments.DepartmentModel Class Reference

View model for department page.

Public Member Functions

- [DepartmentModel](#) ()
Initializes a new instance of the [DepartmentModel](#) class.
- bool [HasChanged](#) ()
Check if the content of the faculty lists has changed since the last call of this function.

Properties

- ObservableCollection
< [FacultyModel](#) > [Faculties](#) [get, set]
Gets or sets the faculty list.
- DateTime [CreateTime](#) [get]
Gets the creation time.

5.22.1 Detailed Description

View model for department page.

5.22.2 Constructor & Destructor Documentation

5.22.2.1 CampusAppWP8.Model.Departments.DepartmentModel.DepartmentModel ()

Initializes a new instance of the [DepartmentModel](#) class.

5.22.3 Member Function Documentation

5.22.3.1 bool CampusAppWP8.Model.Departments.DepartmentModel.HasChanged ()

Check if the content of the faculty lists has changed since the last call of this function.

Returns

true, if changes happen since last request, otherwise false

5.22.4 Property Documentation**5.22.4.1 DateTime CampusAppWP8.Model.Departments.DepartmentModel.CreateTime [get]**

Gets the creation time.

5.22.4.2 ObservableCollection<FacultyModel> CampusAppWP8.Model.Departments.DepartmentModel.Faculties [get], [set]

Gets or sets the faculty list.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Departments/Department-Model.cs

5.23 CampusAppWP8.Pages.Departments.DepartmentPage Class Reference

Pivot page with list of the chairs of the faculties.

Inheritance diagram for CampusAppWP8.Pages.Departments.DepartmentPage:

**Public Member Functions**

- [DepartmentPage \(\)](#)
Initializes a new instance of the [DepartmentPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page. Initialize the feed loading.
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom function.

5.23.1 Detailed Description

Pivot page with list of the chairs of the faculties.

5.23.2 Constructor & Destructor Documentation**5.23.2.1 CampusAppWP8.Pages.Departments.DepartmentPage.DepartmentPage ()**

Initializes a new instance of the [DepartmentPage](#) class.

5.23.3 Member Function Documentation

5.23.3.1 override void CampusAppWP8.Pages.Departments.DepartmentPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom function.

Parameters

<i>e</i>	event args
----------	------------

5.23.3.2 override void CampusAppWP8.Pages.Departments.DepartmentPage.OnNavigatedTo (NavigationEventArgs e) [protected]

On navigation to this page. Initialize the feed loading.

Parameters

<i>e</i>	event args
----------	------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Departments/Department-Page.xaml.cs

5.24 CampusAppWP8.Utility.Lui.Button.EmailButton Class Reference

This class create an [Button](#) which start the Email-Client

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.EmailButton:



Public Member Functions

- [EmailButton \(\)](#)
Initializes a new instance of the [EmailButton](#) class.

Static Public Attributes

- static readonly DependencyProperty [EmailProperty](#) = DependencyProperty.Register("EmailAddress", typeof(object), typeof([EmailButton](#)), new PropertyMetadata(false))
Register the EmailProperty

Protected Member Functions

- override void [OnClick \(\)](#)
Overrides the OnClick-Method from button

Properties

- object [EmailAddress](#) [get, set]
Gets or sets the EmailAddress

5.24.1 Detailed Description

This class create an [Button](#) which start the Email-Client

5.24.2 Constructor & Destructor Documentation

5.24.2.1 CampusAppWP8.Utility.Lui.Button.EmailButton.EmailButton ()

Initializes a new instance of the [EmailButton](#) class.

5.24.3 Member Function Documentation

5.24.3.1 override void CampusAppWP8.Utility.Lui.Button.EmailButton.OnClick () [protected]

Overrides the OnClick-Method from button
now method start the EmailComposeTask

5.24.4 Member Data Documentation

5.24.4.1 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.EmailButton.EmailProperty = DependencyProperty.Register("EmailAddress", typeof(object), typeof(EmailButton), new PropertyMetadata(false)) [static]

Register the EmailProperty

5.24.5 Property Documentation

5.24.5.1 object CampusAppWP8.Utility.Lui.Button.EmailButton.EmailAddress [get], [set]

Gets or sets the EmailAddress


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/Email-Button.cs

5.25 CampusAppWP8.Feed.Events.EventFeed Class Reference

Event [Feed](#).

Inheritance diagram for CampusAppWP8.Feed.Events.EventFeed:



Public Member Functions

- [EventFeed](#) (bool autoLoad=true)
Initializes a new instance of the [EventFeed](#) class.

5.25.1 Detailed Description

Event [Feed](#).

5.25.2 Constructor & Destructor Documentation

5.25.2.1 CampusAppWP8.Feed.Events.EventFeed.EventFeed (bool autoLoad = true)

Initializes a new instance of the [EventFeed](#) class.

Parameters

<i>autoLoad</i>	automatic loading of the data
-----------------	-------------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Events/EventFeed.cs

5.26 CampusAppWP8.Pages.Events.EventIndexPage Class Reference

Overview page of all events.

Inheritance diagram for CampusAppWP8.Pages.Events.EventIndexPage:



Public Member Functions

- [EventIndexPage](#) ()
Initializes a new instance of the [EventIndexPage](#) class.

Static Public Member Functions

- static [EventFeed](#) [GetEventFeed](#) ()
Return the eventFeed object.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page, creates a FeedEventHandler and load the RSS feed data.

Properties

- static [EventFeed Feed](#) [get, set]
Gets or sets the feed object.

5.26.1 Detailed Description

Overview page of all events.

5.26.2 Constructor & Destructor Documentation

5.26.2.1 [CampusAppWP8.Pages.Events.EventIndexPage.EventIndexPage](#) ()

Initializes a new instance of the [EventIndexPage](#) class.

5.26.3 Member Function Documentation

5.26.3.1 static [EventFeed CampusAppWP8.Pages.Events.EventIndexPage.GetEventFeed](#) () [static]

Return the eventFeed object.

Returns

event feed object

5.26.3.2 override void [CampusAppWP8.Pages.Events.EventIndexPage.OnNavigatedTo](#) ([NavigationEventArgs e](#)) [protected]

On navigation to this page, creates a [FeedEventHandler](#) and load the RSS feed data.

Parameters

<i>e</i>	event args
----------	------------

5.26.4 Property Documentation

5.26.4.1 [EventFeed CampusAppWP8.Pages.Events.EventIndexPage.Feed](#) [static],[get],[set]

Gets or sets the feed object.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Events/EventIndexPage.xaml.cs

5.27 [CampusAppWP8.Pages.Events.EventPage](#) Class Reference

[EventPage](#), where every event fees has his own PivotItem.

Inheritance diagram for [CampusAppWP8.Pages.Events.EventPage](#):



Public Member Functions

- [EventPage](#) ()
Initializes a new instance of the [EventPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page. The PivotItem source will be set, if it wasn't before. Navigating to the submitted index of the chosen PivotItem page.
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom function.

5.27.1 Detailed Description

[EventPage](#), where every event fees has his own PivotItem.

5.27.2 Constructor & Destructor Documentation

5.27.2.1 CampusAppWP8.Pages.Events.EventPage.EventPage ()

Initializes a new instance of the [EventPage](#) class.

5.27.3 Member Function Documentation

5.27.3.1 override void CampusAppWP8.Pages.Events.EventPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom function.

Parameters

<i>e</i>	event args
----------	------------

5.27.3.2 override void CampusAppWP8.Pages.Events.EventPage.OnNavigatedTo (NavigationEventArgs e) [protected]

On navigation to this page. The PivotItem source will be set, if it wasn't before. Navigating to the submitted index of the chosen PivotItem page.

Parameters

e	Event Args
---	------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Events/EventPage.-xaml.cs

5.28 CampusAppWP8.Model.Departments.FacultyModel Class Reference

[Model](#) for holding the faculty information.

Public Member Functions

- [FacultyModel](#) ()
Initializes a new instance of the [FacultyModel](#) class.
- [FacultyModel](#) (string name)
Initializes a new instance of the [FacultyModel](#) class.
- bool [RemoveChair](#) (string chairName)
Remove a chair model from the list.
- bool [AddChair](#) ([ChairModel](#) chairModel)
Add a chair to the list, if it does not already exist.
- bool [AddChair](#) (string nameDE, string nameEN, string url)
Create a chair model and add it to the list, if it does not already exist.
- [ChairModel](#) [GetChairModel](#) (string name)
Return the chair model of the chair with the specified name.
- bool [HasChanged](#) (bool reset=true)
Return true if there were changes in the chair list, otherwise false.

Properties

- [ObservableCollection](#)< [ChairModel](#) > [Chairs](#) [get, set]
Gets or sets the list of the chairs containing to this faculty.
- string [Name](#) [get]
Gets the name of the faculty.
- string [Id](#) [get, set]
Gets or sets the id of the faculty.

5.28.1 Detailed Description

[Model](#) for holding the faculty information.

5.28.2 Constructor & Destructor Documentation

5.28.2.1 CampusAppWP8.Model.Departments.FacultyModel.FacultyModel ()

Initializes a new instance of the [FacultyModel](#) class.

5.28.2.2 CampusAppWP8.Model.Departments.FacultyModel.FacultyModel (string name)

Initializes a new instance of the [FacultyModel](#) class.

Parameters

<i>name</i>	name of the faculty
-------------	---------------------

5.28.3 Member Function Documentation

5.28.3.1 `bool CampusAppWP8.Model.Departments.FacultyModel.AddChair (ChairModel chairModel)`

Add a chair to the list, if it does not already exist.

Parameters

<i>chairModel</i>	chair model to add
-------------------	--------------------

Returns

true, is succeeded

5.28.3.2 `bool CampusAppWP8.Model.Departments.FacultyModel.AddChair (string nameDE, string nameEN, string url)`

Create a chair model and add it to the list, if it does not already exist.

Parameters

<i>nameDE</i>	german name of the chair
<i>nameEN</i>	english name of the chair
<i>url</i>	url of the chair home page

Returns

true, if succeeded

5.28.3.3 `ChairModel CampusAppWP8.Model.Departments.FacultyModel.GetChairModel (string name)`

Return the chair model of the chair with the specified name.

Parameters

<i>name</i>	name of the chair
-------------	-------------------

Returns

chair model, if succeeded, otherwise null

5.28.3.4 `bool CampusAppWP8.Model.Departments.FacultyModel.HasChanged (bool reset = true)`

Return true if there were changes in the chair list, otherwise false.

Parameters

<i>reset</i>	when true, the hasChanged flag will be reset
--------------	--

Returns

true, when changed, otherwise false

5.28.3.5 `bool CampusAppWP8.Model.Departments.FacultyModel.RemoveChair (string chairName)`

Remove a chair model from the lost.

Parameters

<i>chairName</i>	name of the chair
------------------	-------------------

Returns

true, if succeeded

5.28.4 Property Documentation

5.28.4.1 `ObservableCollection<ChairModel> CampusAppWP8.Model.Departments.FacultyModel.Chairs` [get], [set]

Gets or sets the list of the chairs containing to this faculty.

5.28.4.2 `string CampusAppWP8.Model.Departments.FacultyModel.Id` [get], [set]

Gets or sets the id of the faculty.

5.28.4.3 `string CampusAppWP8.Model.Departments.FacultyModel.Name` [get]

Gets the name of the faculty.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Departments/Faculty-Model.cs

5.29 CampusAppWP8.Utility.File Class Reference

[File](#) class.

Public Types

- enum [IOTypeRead](#) { [IOTypeRead.INVALID](#) = 0, [IOTypeRead.ReadSync](#) = 1, [IOTypeRead.ReadAsync](#) = 2 }
IO read type ENUM.
- enum [IOTypeWrite](#) { [IOTypeWrite.INVALID](#) = 0, [IOTypeWrite.WriteSync](#) = 1, [IOTypeWrite.WriteAsync](#) = 2, [IOTypeWrite.ReadOnly](#) = 3 }
IO write type ENUM.

Public Member Functions

- [File](#) (string filename, [IOTypeRead](#) read, [IOTypeWrite](#) write)
Initializes a new instance of the File class.
- delegate void [WriteCallbackFunc](#) ()
Delegation of the write callback function prototype.
- string [ReadFile](#) ([IOTypeRead](#) ioType=[IOTypeRead.INVALID](#))
Read data from file to a string.
- void [WriteFile](#) (byte[] data, [WriteCallbackFunc](#) onSavedCallback, [WriteCallbackFunc](#) onFailedCallback, [IOTypeWrite](#) ioType=[IOTypeWrite.INVALID](#))
Write bytes to the file.
- FileInfo [GetFileInfo](#) ()

Return a info object of the file.

- bool `Exist ()`

Check if a file is existing.

5.29.1 Detailed Description

`File` class.

5.29.2 Member Enumeration Documentation

5.29.2.1 enum `CampusAppWP8.Utility.File.IOTypeRead`

IO read type ENUM.

Enumerator

INVALID Invalid/unset state.

ReadSync Sync read.

ReadAsync Async read.

5.29.2.2 enum `CampusAppWP8.Utility.File.IOTypeWrite`

IO write type ENUM.

Enumerator

INVALID Invalid/unset state.

WriteSync Sync write.

WriteAsync Async write.

ReadOnly Read only, no writing.

5.29.3 Constructor & Destructor Documentation

5.29.3.1 `CampusAppWP8.Utility.File.File (string filename, IOTypeRead read, IOTypeWrite write)`

Initializes a new instance of the `File` class.

Parameters

<i>filename</i>	file name
<i>read</i>	read type
<i>write</i>	write type

5.29.4 Member Function Documentation

5.29.4.1 `bool CampusAppWP8.Utility.File.Exist ()`

Check if a file is existing.

Returns

true, if file exists, otherwise false

5.29.4.2 FileInfo CampusAppWP8.Utility.File.GetFileInfo ()

Return a info object of the file.

Returns

info of the file

5.29.4.3 string CampusAppWP8.Utility.File.ReadFile (IOTypeRead ioType = IOTypeRead.INVALID)

Read data from file to a string.

Parameters

<i>ioType</i>	read type
---------------	-----------

Returns

data string

5.29.4.4 delegate void CampusAppWP8.Utility.File.WriteCallbackFunc ()

Delegation of the write callback function prototype.

5.29.4.5 void CampusAppWP8.Utility.File.WriteFile (byte[] data, WriteCallbackFunc onSavedCallback, WriteCallbackFunc onFailedCallback, IOTypeWrite ioType = IOTypeWrite.INVALID)

Write bytes to the file.

Parameters

<i>data</i>	data byte array
<i>ioType</i>	write type


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/File.cs

5.30 CampusAppWP8.Utility.Lui.Button.GoToMapButton Class Reference

This class create an [Button](#) which open a Map

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.GoToMapButton:



Public Member Functions

- [GoToMapButton](#) ()

Initializes a new instance of the [GoToMapButton](#) class.

Static Public Attributes

- static readonly DependencyProperty [SearchTermProperty](#) = DependencyProperty.Register("SearchTerm", typeof(object), typeof([GoToMapButton](#)), new PropertyMetadata(false))

Register the SearchTermProperty

Protected Member Functions

- override void [OnClick](#) ()

Overrides the OnClick-Method from button

Properties

- object [SearchTerm](#) [get, set]

Gets or sets the Url

5.30.1 Detailed Description

This class create an [Button](#) which open a Map

5.30.2 Constructor & Destructor Documentation

5.30.2.1 CampusAppWP8.Utility.Lui.Button.GoToMapButton.GoToMapButton ()

Initializes a new instance of the [GoToMapButton](#) class.

5.30.3 Member Function Documentation

5.30.3.1 override void CampusAppWP8.Utility.Lui.Button.GoToMapButton.OnClick () [protected]

Overrides the OnClick-Method from button

now method start the MapTask

5.30.4 Member Data Documentation

5.30.4.1 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.GoToMapButton.SearchTermProperty = DependencyProperty.Register("SearchTerm", typeof(object), typeof([GoToMapButton](#)), new PropertyMetadata(false)) [static]

Register the SearchTermProperty

5.30.5 Property Documentation

5.30.5.1 object CampusAppWP8.Utility.Lui.Button.GoToMapButton.SearchTerm [get], [set]

Gets or sets the Url

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/GoToMap-Button.cs

5.31 CampusAppWP8.Utility.HttpRequest Class Reference

Class realize the access of restful [HttpRequest](#)

Public Member Functions

- [HttpRequest](#) ()
Initializes a new instance of the [HttpRequest](#) class.
- [HttpRequest](#) (Uri apiBaseAddress)
Initializes a new instance of the [HttpRequest](#) class.
- void [HttpGet](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-get-method resource
- Uri [CreateGetUrl](#) (List< [UriParamModel](#) > parameters)
Method create the Url for the http-get-method
- void [HttpDelete](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-delete-method
- void [HttpHead](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-head-method
- void [HttpOptions](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-options-method
- void [HttpConnect](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-connect-method
- void [HttpTrace](#) (Uri url, Action< object, DownloadStringCompletedEventArgs > action)
Method realize the http-trace-method
- void [HttpPost](#) (Uri url, Action< object, UploadStringCompletedEventArgs > action, string postData)
Method realize the http-post-method
- void [HttpPut](#) (Uri url, Action< object, UploadStringCompletedEventArgs > action, string putData)
Method realize the http-put-method
- void [HttpPatch](#) (Uri url, Action< object, UploadStringCompletedEventArgs > action, string patchData)
Method realize the http-patch-method

5.31.1 Detailed Description

Class realize the access of restful [HttpRequest](#)

5.31.2 Constructor & Destructor Documentation

5.31.2.1 CampusAppWP8.Utility.HttpRequest.HttpRequest ()

Initializes a new instance of the [HttpRequest](#) class.

5.31.2.2 CampusAppWP8.Utility.HttpRequest.HttpRequest (Uri apiBaseAddress)

Initializes a new instance of the [HttpRequest](#) class.

Parameters

<i>apiBaseAddress</i>	the url of the HttpRequest base address
-----------------------	---

5.31.3 Member Function Documentation

5.31.3.1 Uri CampusAppWP8.Utility.HttpRequest.CreateGetUrl (List< UriParamModel > *parameters*)

Method create the Url for the http-get-method

Parameters

<i>parameters</i>	list of parameters
-------------------	--------------------

Returns

absolute API-Url include GetParameter

5.31.3.2 void CampusAppWP8.Utility.HttpRequest.HttpConnect (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-connect-method

is not supported by WebClient

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

5.31.3.3 void CampusAppWP8.Utility.HttpRequest.HttpDelete (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-delete-method

is not supported by WebClient

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

5.31.3.4 void CampusAppWP8.Utility.HttpRequest.HttpGet (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-get-method resource

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

5.31.3.5 void CampusAppWP8.Utility.HttpRequest.HttpHead (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-head-method

is not supported by WebClient

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

5.31.3.6 void CampusAppWP8.Utility.HttpRequest.HttpOptions (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-options-method

is not supported by WebClient

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

5.31.3.7 void CampusAppWP8.Utility.HttpRequest.HttpPatch (Uri *url*, Action< object, UploadStringCompletedEventArgs > *action*, string *patchData*)

Method realize the http-patch-method

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method
<i>patchData</i>	Data which are sending via patch to the HttpRequest

5.31.3.8 void CampusAppWP8.Utility.HttpRequest.HttpPost (Uri *url*, Action< object, UploadStringCompletedEventArgs > *action*, string *postData*)

Method realize the http-post-method

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method
<i>postData</i>	Data which are sending via post to the HttpRequest

5.31.3.9 void CampusAppWP8.Utility.HttpRequest.HttpPut (Uri *url*, Action< object, UploadStringCompletedEventArgs > *action*, string *putData*)

Method realize the http-put-method

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method
<i>putData</i>	Data which are sending via put to the HttpRequest

5.31.3.10 void CampusAppWP8.Utility.HttpRequest.HttpTrace (Uri *url*, Action< object, DownloadStringCompletedEventArgs > *action*)

Method realize the http-trace-method

is not supported by WebClient

Parameters

<i>url</i>	Url of the resource
<i>action</i>	callback method

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/HttpRequest.cs

5.32 CampusAppWP8.Resources.Icons Class Reference

[Icons](#) uri string.

Properties

- static string [Add](#) [get]
Gets the uri string of the Add icon.
- static string [Campus](#) [get]
Gets the uri string of the Campus icon.
- static string [Cow](#) [get]
Gets the uri string of the Cow icon.
- static string [CowPig](#) [get]
Gets the uri string of the CowPig icon.
- static string [Delete](#) [get]
Gets the uri string of the Delete icon.
- static string [Departments](#) [get]
Gets the uri string of the Departments icon.
- static string [Favorite](#) [get]
Gets the uri string of the Favorite icon.
- static string [Fish](#) [get]
Gets the uri string of the Fish icon.
- static string [Fowl](#) [get]
Gets the uri string of the Fowl icon.
- static string [Free](#) [get]
Gets the uri string of the Free icon.
- static string [Homework](#) [get]
Gets the uri string of the Homework icon.
- static string [Info](#) [get]
Gets the uri string of the Info icon.
- static string [Lamb](#) [get]
Gets the uri string of the Lamb icon.
- static string [Lectures](#) [get]
Gets the uri string of the Lectures icon.
- static string [Link](#) [get]
Gets the uri string of the Link icon.
- static string [Mensa](#) [get]
Gets the uri string of the Mensa icon.
- static string [News](#) [get]
Gets the uri string of the News icon.
- static string [Openhours](#) [get]
Gets the uri string of the Openhours icon.

- static string [Phone](#) [get]
Gets the uri string of the Phone icon.
- static string [Pig](#) [get]
Gets the uri string of the Pig icon.
- static string [Schedule](#) [get]
Gets the uri string of the Schedule icon.
- static string [Search](#) [get]
Gets the uri string of the Search icon.
- static string [StudentCouncil](#) [get]
Gets the uri string of the StudentCouncil icon.
- static string [Update](#) [get]
Gets the uri string of the Update icon.
- static string [Vegetarian](#) [get]
Gets the uri string of the Vegetarian icon.
- static string [WebMail](#) [get]
Gets the uri string of the WebMail icon.
- static string [Wild](#) [get]
Gets the uri string of the Wild icon.

5.32.1 Detailed Description

[Icons](#) uri string.

5.32.2 Property Documentation

5.32.2.1 `string CampusAppWP8.Resources.Icons.Add` [static],[get]

Gets the uri string of the Add icon.

5.32.2.2 `string CampusAppWP8.Resources.Icons.Campus` [static],[get]

Gets the uri string of the Campus icon.

5.32.2.3 `string CampusAppWP8.Resources.Icons.Cow` [static],[get]

Gets the uri string of the Cow icon.

5.32.2.4 `string CampusAppWP8.Resources.Icons.CowPig` [static],[get]

Gets the uri string of the CowPig icon.

5.32.2.5 `string CampusAppWP8.Resources.Icons.Delete` [static],[get]

Gets the uri string of the Delete icon.

5.32.2.6 `string CampusAppWP8.Resources.Icons.Departments` [static],[get]

Gets the uri string of the Departments icon.

5.32.2.7 `string CampusAppWP8.Resources.Icons.Favorite` `[static], [get]`

Gets the uri string of the Favorite icon.

5.32.2.8 `string CampusAppWP8.Resources.Icons.Fish` `[static], [get]`

Gets the uri string of the Fish icon.

5.32.2.9 `string CampusAppWP8.Resources.Icons.Fowl` `[static], [get]`

Gets the uri string of the Fowl icon.

5.32.2.10 `string CampusAppWP8.Resources.Icons.Free` `[static], [get]`

Gets the uri string of the Free icon.

5.32.2.11 `string CampusAppWP8.Resources.Icons.Homework` `[static], [get]`

Gets the uri string of the Homework icon.

5.32.2.12 `string CampusAppWP8.Resources.Icons.Info` `[static], [get]`

Gets the uri string of the Info icon.

5.32.2.13 `string CampusAppWP8.Resources.Icons.Lamb` `[static], [get]`

Gets the uri string of the Lamb icon.

5.32.2.14 `string CampusAppWP8.Resources.Icons.Lectures` `[static], [get]`

Gets the uri string of the Lectures icon.

5.32.2.15 `string CampusAppWP8.Resources.Icons.Link` `[static], [get]`

Gets the uri string of the Link icon.

5.32.2.16 `string CampusAppWP8.Resources.Icons.Mensa` `[static], [get]`

Gets the uri string of the Mensa icon.

5.32.2.17 `string CampusAppWP8.Resources.Icons.News` `[static], [get]`

Gets the uri string of the News icon.

5.32.2.18 `string CampusAppWP8.Resources.Icons.Openhours` `[static], [get]`

Gets the uri string of the Openhours icon.

5.32.2.19 `string CampusAppWP8.Resources.Icons.Phone` `[static],[get]`

Gets the uri string of the Phone icon.

5.32.2.20 `string CampusAppWP8.Resources.Icons.Pig` `[static],[get]`

Gets the uri string of the Pig icon.

5.32.2.21 `string CampusAppWP8.Resources.Icons.Schedule` `[static],[get]`

Gets the uri string of the Schedule icon.

5.32.2.22 `string CampusAppWP8.Resources.Icons.Search` `[static],[get]`

Gets the uri string of the Search icon.

5.32.2.23 `string CampusAppWP8.Resources.Icons.StudentCouncil` `[static],[get]`

Gets the uri string of the StudentCouncil icon.

5.32.2.24 `string CampusAppWP8.Resources.Icons.Update` `[static],[get]`

Gets the uri string of the Update icon.

5.32.2.25 `string CampusAppWP8.Resources.Icons.Vegetarian` `[static],[get]`

Gets the uri string of the Vegetarian icon.

5.32.2.26 `string CampusAppWP8.Resources.Icons.WebMail` `[static],[get]`

Gets the uri string of the WebMail icon.

5.32.2.27 `string CampusAppWP8.Resources.Icons.Wild` `[static],[get]`

Gets the uri string of the Wild icon.

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Resources/Icons.cs`

5.33 CampusAppWP8.Model.Lecture.LectureActivity Class Reference

[Model](#) for a Activity

Public Member Functions

- [LectureActivity](#) ()
Initializes a new instance of the [LectureActivity](#) class.
- void [CreateLectureString](#) ()

Method create a formatted string of the LecturerList

- void [CreateCourseString](#) ()

Method create a formatted string of the CourseList

Properties

- string [Type](#) [get, set]
Gets or sets the type of the activity
- int [Id](#) [get, set]
Gets or sets the id of the activity
- int [Semester](#) [get, set]
Gets or sets semester of the activity
- string [SWS](#) [get, set]
Gets or sets the contact hour
- [LectureModule Modul](#) [get, set]
Gets or sets [LectureModule](#)
- string [Title](#) [get, set]
Gets or sets [LectureTitle](#)
- [ObservableCollection](#)
< [LectureLecturer](#) > [Lecturer](#) [get, set]
Gets or sets the lecturers
- string [LecturerString](#) [get, set]
Gets or sets the formatted string of the lecturers
- string [CourseString](#) [get, set]
Gets or sets formatted string of the courses
- [ObservableCollection](#)
< [LectureCourse](#) > [Course](#) [get, set]
Gets or sets the courses
- [ObservableCollection](#)< [LectureDate](#) > [Dates](#) [get, set]
Gets or sets the dates of the activity
- string [Department](#) [get, set]
Gets or sets the [Department](#)
- string [Topic](#) [get, set]
Gets or sets the topic of the [Lecture](#)

5.33.1 Detailed Description

[Model](#) for a Activity

5.33.2 Constructor & Destructor Documentation

5.33.2.1 CampusAppWP8.Model.Lecture.LectureActivity.LectureActivity ()

Initializes a new instance of the [LectureActivity](#) class.

5.33.3 Member Function Documentation

5.33.3.1 void CampusAppWP8.Model.Lecture.LectureActivity.CreateCourseString ()

Method create a formatted string of the CourseList

5.33.3.2 void CampusAppWP8.Model.Lecture.LectureActivity.CreateLectureString ()

Method create a formatted string of the LecturerList

5.33.4 Property Documentation

5.33.4.1 `ObservableCollection<LectureCourse> CampusAppWP8.Model.Lecture.LectureActivity.Course` [get], [set]

Gets or sets the courses

5.33.4.2 `string CampusAppWP8.Model.Lecture.LectureActivity.CourseString` [get], [set]

Gets or sets formatted string of the courses

5.33.4.3 `ObservableCollection<LectureDate> CampusAppWP8.Model.Lecture.LectureActivity.Dates` [get], [set]

Gets or sets the dates of the activity

5.33.4.4 `string CampusAppWP8.Model.Lecture.LectureActivity.Department` [get], [set]

Gets or sets the Department

5.33.4.5 `int CampusAppWP8.Model.Lecture.LectureActivity.Id` [get], [set]

Gets or sets the id of the activity

5.33.4.6 `ObservableCollection<LectureLecturer> CampusAppWP8.Model.Lecture.LectureActivity.Lecturer` [get], [set]

Gets or sets the lecturers

5.33.4.7 `string CampusAppWP8.Model.Lecture.LectureActivity.LecturerString` [get], [set]

Gets or sets the formatted string of the lecturers

5.33.4.8 `LectureModule CampusAppWP8.Model.Lecture.LectureActivity.Modul` [get], [set]

Gets or sets [LectureModule](#)

5.33.4.9 `int CampusAppWP8.Model.Lecture.LectureActivity.Semester` [get], [set]

Gets or sets semester of the activity

5.33.4.10 `string CampusAppWP8.Model.Lecture.LectureActivity.SWS` [get], [set]

Gets or sets the contact hour

5.33.4.11 string CampusAppWP8.Model.Lecture.LectureActivity.Title [get], [set]

Gets or sets LectureTitle

5.33.4.12 string CampusAppWP8.Model.Lecture.LectureActivity.Topic [get], [set]

Gets or sets the topic of the [Lecture](#)

5.33.4.13 string CampusAppWP8.Model.Lecture.LectureActivity.Type [get], [set]

Gets or sets the type of the activity


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/Lecture-Activity.cs

5.34 CampusAppWP8.Feed.Lecture.LectureApi Class Reference

Class for the feed of the [Lecture](#)

Inheritance diagram for CampusAppWP8.Feed.Lecture.LectureApi:



Public Member Functions

- [LectureApi](#) ()
Initializes a new instance of the [LectureApi](#) class.

5.34.1 Detailed Description

Class for the feed of the [Lecture](#)

need the XmlAPI

5.34.2 Constructor & Destructor Documentation

5.34.2.1 CampusAppWP8.Feed.Lecture.LectureApi.LectureApi ()

Initializes a new instance of the [LectureApi](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Api/Lecture/LectureApi.cs

5.35 CampusAppWP8.Model.Lecture.LectureCourse Class Reference

[Model](#) for a course

Public Member Functions

- [LectureCourse](#) ()
Initializes a new instance of the [LectureCourse](#) class.

Properties

- string [Title](#) [get, set]
Gets or sets the title of the course

5.35.1 Detailed Description

[Model](#) for a course

5.35.2 Constructor & Destructor Documentation

5.35.2.1 CampusAppWP8.Model.Lecture.LectureCourse.LectureCourse ()

Initializes a new instance of the [LectureCourse](#) class.

5.35.3 Property Documentation

5.35.3.1 string CampusAppWP8.Model.Lecture.LectureCourse.Title [get], [set]

Gets or sets the title of the course

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/LectureCourse.cs

5.36 CampusAppWP8.Model.Lecture.LectureDate Class Reference

[Model](#) for the date of an activity

Public Member Functions

- [LectureDate](#) ()
Initializes a new instance of the [LectureDate](#) class.

Properties

- string [WeekDay](#) [get, set]
Gets or sets WeekDay
- string [From](#) [get, set]
Gets or sets From
- string [To](#) [get, set]
Gets or sets To
- string [Interval](#) [get, set]
Gets or sets Interval

- string [Room](#) [get, set]
Gets or sets Room
- string [StartDate](#) [get, set]
Gets or sets StartDate
- string [EndDate](#) [get, set]
Gets or sets EndDate

5.36.1 Detailed Description

[Model](#) for the date of an activity

5.36.2 Constructor & Destructor Documentation

5.36.2.1 CampusAppWP8.Model.Lecture.LectureDate.LectureDate ()

Initializes a new instance of the [LectureDate](#) class.

5.36.3 Property Documentation

5.36.3.1 string CampusAppWP8.Model.Lecture.LectureDate.EndDate [get], [set]

Gets or sets EndDate

5.36.3.2 string CampusAppWP8.Model.Lecture.LectureDate.From [get], [set]

Gets or sets From

5.36.3.3 string CampusAppWP8.Model.Lecture.LectureDate.Interval [get], [set]

Gets or sets Interval

5.36.3.4 string CampusAppWP8.Model.Lecture.LectureDate.Room [get], [set]

Gets or sets Room

5.36.3.5 string CampusAppWP8.Model.Lecture.LectureDate.StartDate [get], [set]

Gets or sets StartDate

5.36.3.6 string CampusAppWP8.Model.Lecture.LectureDate.To [get], [set]

Gets or sets To

5.36.3.7 string CampusAppWP8.Model.Lecture.LectureDate.WeekDay [get], [set]

Gets or sets WeekDay

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/Lecture-Date.cs

5.37 CampusAppWP8.Model.Lecture.LectureLecturer Class Reference

Model for a lecturer

Public Member Functions

- [LectureLecturer](#) ()
Initializes a new instance of the [LectureLecturer](#) class.
- override string [ToString](#) ()
Method overrides the base [ToString\(\)](#) and create an formatted string of the lecturer

Properties

- string [FirstName](#) [get, set]
Gets or sets the [FirstName](#) of a lecturer
- string [LastName](#) [get, set]
Gets or sets the [LastName](#) of a lecturer
- string [Title](#) [get, set]
Gets or sets the [title](#) of a lecturer
- string [Responsibility](#) [get, set]
Gets or sets the [Responsibility](#) of a lecturer

5.37.1 Detailed Description

Model for a lecturer

5.37.2 Constructor & Destructor Documentation

5.37.2.1 CampusAppWP8.Model.Lecture.LectureLecturer.LectureLecturer ()

Initializes a new instance of the [LectureLecturer](#) class.

5.37.3 Member Function Documentation

5.37.3.1 override string CampusAppWP8.Model.Lecture.LectureLecturer.ToString ()

Method overrides the base [ToString\(\)](#) and create an formatted string of the lecturer

Returns

returns a string like: [Title] FirstName LastName [(Responsibility)]

5.37.4 Property Documentation

5.37.4.1 string CampusAppWP8.Model.Lecture.LectureLecturer.FirstName [get], [set]

Gets or sets the [FirstName](#) of a lecturer

5.37.4.2 string CampusAppWP8.Model.Lecture.LectureLecturer.LastName [get], [set]

Gets or sets the [LastName](#) of a lecturer

5.37.4.3 `string CampusAppWP8.Model.Lecture.LectureLecturer.Responsibility` [get], [set]

Gets or sets the Responsibility of a lecturer

5.37.4.4 `string CampusAppWP8.Model.Lecture.LectureLecturer.Title` [get], [set]

Gets or sets the title of a lecturer

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/LectureLecturer.cs

5.38 CampusAppWP8.Model.Lecture.LectureList Class Reference

[Model](#) for a List of [LectureActivity](#)

Public Member Functions

- [LectureList](#) ()
Initializes a new instance of the [LectureList](#) class.
- [LectureActivity GetActivity](#) (int id)
Method return a certain activity

Properties

- `ObservableCollection`
< [LectureActivity](#) > [Activities](#) [get, set]
Gets or sets List of the activities

5.38.1 Detailed Description

[Model](#) for a List of [LectureActivity](#)

5.38.2 Constructor & Destructor Documentation

5.38.2.1 `CampusAppWP8.Model.Lecture.LectureList.LectureList ()`

Initializes a new instance of the [LectureList](#) class.

5.38.3 Member Function Documentation

5.38.3.1 `LectureActivity CampusAppWP8.Model.Lecture.LectureList.GetActivity (int id)`

Method return a certain activity

Parameters

<i>id</i>	id of the activity
-----------	--------------------

Returns

the activity (FirstOrDefault)

5.38.4 Property Documentation**5.38.4.1 ObservableCollection<LectureActivity> CampusAppWP8.Model.Lecture.LectureList.Activities** [get], [set]

Gets or sets List of the activities

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/LectureList.-cs

5.39 CampusAppWP8.Model.Lecture.LectureModule Class Reference

[Model](#) for the module of an lecture

Public Member Functions

- [LectureModule](#) ()
Initializes a new instance of the [LectureModule](#) class.

Properties

- string [Title](#) [get, set]
Gets or sets the title of the module
- int [Number](#) [get, set]
Gets or sets the number of the module and create the URL
- Uri [Url](#) [get]
Gets the URL of the module

5.39.1 Detailed Description

[Model](#) for the module of an lecture

5.39.2 Constructor & Destructor Documentation**5.39.2.1 CampusAppWP8.Model.Lecture.LectureModule.LectureModule ()**

Initializes a new instance of the [LectureModule](#) class.

5.39.3 Property Documentation**5.39.3.1 int CampusAppWP8.Model.Lecture.LectureModule.Number** [get], [set]

Gets or sets the number of the module and create the URL

5.39.3.2 `string CampusAppWP8.Model.Lecture.LectureModule.Title` [get], [set]

Gets or sets the title of the module

5.39.3.3 `Uri CampusAppWP8.Model.Lecture.LectureModule.Url` [get]

Gets the URL of the module


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/Lecture-Module.cs

5.40 CampusAppWP8.Pages.Lecture.LecturePage Class Reference

Class for the [LecturePage](#)

Inheritance diagram for CampusAppWP8.Pages.Lecture.LecturePage:



Public Member Functions

- [LecturePage](#) ()
Initializes a new instance of the [LecturePage](#) class.

Protected Member Functions

- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Methods overrides the OnNavigatedFrom-Method

5.40.1 Detailed Description

Class for the [LecturePage](#)

5.40.2 Constructor & Destructor Documentation

5.40.2.1 `CampusAppWP8.Pages.Lecture.LecturePage.LecturePage ()`

Initializes a new instance of the [LecturePage](#) class.

5.40.3 Member Function Documentation

5.40.3.1 `override void CampusAppWP8.Pages.Lecture.LecturePage.OnNavigatedFrom (NavigationEventArgs e)`
[protected]

Methods overrides the OnNavigatedFrom-Method

Parameters

e	some NavigationEventArgs
---	--------------------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Lecture/LecturePage.xaml.cs

5.41 CampusAppWP8.Model.Lecture.LecturePageModel Class Reference

[Model](#) for the LecturePage

Public Member Functions

- [LecturePageModel](#) ()
Initializes a new instance of the [LecturePageModel](#) class.
- void [LoadLists](#) ()
Load all ListPickerLists
- void [LoadFromNumberList](#) ()
Load the NumberList
- void [LoadToNumberList](#) ()
Load the NumberList

Public Attributes

- int [selectCourseIndex](#)
Variable for the courseIndex
- int [selectDegreeIndex](#)
Variable for the degreeIndex
- int [selectSemesterIndex](#)
Variable for the semesterIndex
- int [selectFromIndex](#)
Variable for the fromIndex
- int [selectToIndex](#)
Variable for the toIndex

Properties

- int [SelectCourseIndex](#) [get, set]
Gets or sets the selected course index
- int [SelectDegreeIndex](#) [get, set]
Gets or sets the selected degree index
- int [SelectSemesterIndex](#) [get, set]
Gets or sets the selected semester-index
- int [SelectFromIndex](#) [get, set]
Gets or sets the selected from-index
- int [SelectToIndex](#) [get, set]
Gets or sets the selected to-index
- [ListPickerItemListModel CourseList](#) [get]

- Gets List for the courses of the BTU*

 - [ListPickerListModel DegreeList](#) [get]

Gets List of the degrees
- [ListPickerListModel SemesterList](#) [get]

Gets List of the semester
- [ListPickerListModel FromNumberList](#) [get]

Gets List for the number of semester
- [ListPickerListModel ToNumberList](#) [get]

Gets the NumberList

5.41.1 Detailed Description

[Model](#) for the LecturePage

5.41.2 Constructor & Destructor Documentation

5.41.2.1 CampusAppWP8.Model.Lecture.LecturePageModel.LecturePageModel ()

Initializes a new instance of the [LecturePageModel](#) class.

5.41.3 Member Function Documentation

5.41.3.1 void CampusAppWP8.Model.Lecture.LecturePageModel.LoadFromNumberList ()

Load the NumberList

5.41.3.2 void CampusAppWP8.Model.Lecture.LecturePageModel.LoadLists ()

Load all ListPickerLists

5.41.3.3 void CampusAppWP8.Model.Lecture.LecturePageModel.LoadToNumberList ()

Load the NumberList

5.41.4 Member Data Documentation

5.41.4.1 int CampusAppWP8.Model.Lecture.LecturePageModel.selectCourseIndex

Variable for the courseIndex

5.41.4.2 int CampusAppWP8.Model.Lecture.LecturePageModel.selectDegreeIndex

Variable for the degreeIndex

5.41.4.3 int CampusAppWP8.Model.Lecture.LecturePageModel.selectFromIndex

Variable for the fromIndex

5.41.4.4 `int CampusAppWP8.Model.Lecture.LecturePageModel.selectSemesterIndex`

Variable for the semesterIndex

5.41.4.5 `int CampusAppWP8.Model.Lecture.LecturePageModel.selectToIndex`

Variable for the toIndex

5.41.5 Property Documentation

5.41.5.1 `ListPickerListModel CampusAppWP8.Model.Lecture.LecturePageModel.CourseList` `[get]`

Gets List for the courses of the BTU

5.41.5.2 `ListPickerListModel CampusAppWP8.Model.Lecture.LecturePageModel.DegreeList` `[get]`

Gets List of the degrees

5.41.5.3 `ListPickerListModel CampusAppWP8.Model.Lecture.LecturePageModel.FromNumberList` `[get]`

Gets List for the number of semester

5.41.5.4 `int CampusAppWP8.Model.Lecture.LecturePageModel.SelectCourseIndex` `[get]`, `[set]`

Gets or sets the selected course index

5.41.5.5 `int CampusAppWP8.Model.Lecture.LecturePageModel.SelectDegreeIndex` `[get]`, `[set]`

Gets or sets the selected degree index

5.41.5.6 `int CampusAppWP8.Model.Lecture.LecturePageModel.SelectFromIndex` `[get]`, `[set]`

Gets or sets the selected from-index

5.41.5.7 `int CampusAppWP8.Model.Lecture.LecturePageModel.SelectSemesterIndex` `[get]`, `[set]`

Gets or sets the selected semester-index

5.41.5.8 `int CampusAppWP8.Model.Lecture.LecturePageModel.SelectToIndex` `[get]`, `[set]`

Gets or sets the selected to-index

5.41.5.9 `ListPickerListModel CampusAppWP8.Model.Lecture.LecturePageModel.SemesterList` `[get]`

Gets List of the semester

5.41.5.10 ListPickerItemListModel CampusAppWP8.Model.Lecture.LecturePageModel.ToNumberList [get]

Gets the NumberList


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Lecture/Lecture-PageModel.cs

5.42 CampusAppWP8.Utility.Lui.Button.LinkButton Class Reference

This class create an [Button](#) which start the WebBrowser, which an certain url

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.LinkButton:



Public Member Functions

- [LinkButton](#) ()
Initializes a new instance of the [LinkButton](#) class.

Static Public Attributes

- static readonly DependencyProperty [LinkProperty](#) = DependencyProperty.Register("Url", typeof(object), typeof([LinkButton](#)), new PropertyMetadata(false))
Register the EmailProperty

Protected Member Functions

- override void [OnClick](#) ()
Overrides the OnClick-Method from button

Properties

- object [Url](#) [get, set]
Gets or sets the Url

5.42.1 Detailed Description

This class create an [Button](#) which start the WebBrowser, which an certain url

5.42.2 Constructor & Destructor Documentation

5.42.2.1 CampusAppWP8.Utility.Lui.Button.LinkButton.LinkButton ()

Initializes a new instance of the [LinkButton](#) class.

5.42.3 Member Function Documentation

5.42.3.1 override void CampusAppWP8.Utility.Lui.Button.LinkButton.OnClick () [protected]

Overrides the OnClick-Method from button
now method start the WebBrowserTask

5.42.4 Member Data Documentation

5.42.4.1 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.LinkButton.LinkProperty = DependencyProperty.Register("Url", typeof(object), typeof(LinkButton), new PropertyMetadata(false)) [static]

Register the EmailProperty

5.42.5 Property Documentation

5.42.5.1 object CampusAppWP8.Utility.Lui.Button.LinkButton.Url [get], [set]

Gets or sets the Url

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/Link-Button.cs

5.43 CampusAppWP8.Model.Link.LinkListModel Class Reference

[Model](#) for a list of links.

Public Member Functions

- [LinkListModel](#) ()
Initializes a new instance of the [LinkListModel](#) class.

Properties

- ObservableCollection< [LinkModel](#) > [Links](#) [get, set]
Gets or sets feed information item list.
- DateTime [CreateTime](#) [get]
Gets the creation time of the model.

5.43.1 Detailed Description

[Model](#) for a list of links.

5.43.2 Constructor & Destructor Documentation

5.43.2.1 CampusAppWP8.Model.Link.LinkListModel.LinkListModel ()

Initializes a new instance of the [LinkListModel](#) class.

5.43.3 Property Documentation

5.43.3.1 DateTime CampusAppWP8.Model.Link.LinkListModel.CreateTime [get]

Gets the creation time of the model.

5.43.3.2 ObservableCollection<LinkModel> CampusAppWP8.Model.Link.LinkListModel.Links [get], [set]

Gets or sets feed information item list.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Link/LinkListModel.-cs

5.44 CampusAppWP8.Model.Link.LinkModel Class Reference

[Model](#) for menu

Public Member Functions

- [LinkModel](#) ()
Initializes a new instance of the [LinkModel](#) class.

Properties

- string [Title_DE](#) [get, set]
Gets or sets the german title of the link.
- string [Title_EN](#) [get, set]
Gets or sets the english title of the link.
- string [Link_DE](#) [get, set]
Gets or sets the german link.
- string [Link_EN](#) [get, set]
Gets or sets the english link.
- string [Title](#) [get]
Gets the localized title. If the phone is set to german language, the german title will be returned otherwise the english title.
- string [Link](#) [get]
Gets the localized link. If the phone is set to german language, the german comment will be returned otherwise the english link.

5.44.1 Detailed Description

[Model](#) for menu

5.44.2 Constructor & Destructor Documentation

5.44.2.1 CampusAppWP8.Model.Link.LinkModel.LinkModel ()

Initializes a new instance of the [LinkModel](#) class.

5.44.3 Property Documentation

5.44.3.1 `string CampusAppWP8.Model.Link.LinkModel.Link` [get]

Gets the localized link. if the phone is set to german language, the german comment will be returned otherwise the english link.

5.44.3.2 `string CampusAppWP8.Model.Link.LinkModel.Link_DE` [get], [set]

Gets or sets the german link.

5.44.3.3 `string CampusAppWP8.Model.Link.LinkModel.Link_EN` [get], [set]

Gets or sets the english link.

5.44.3.4 `string CampusAppWP8.Model.Link.LinkModel.Title` [get]

Gets the localized title. If the phone is set to german language, the german title will be returned otherwise the english title.

5.44.3.5 `string CampusAppWP8.Model.Link.LinkModel.Title_DE` [get], [set]

Gets or sets the german title of the link.

5.44.3.6 `string CampusAppWP8.Model.Link.LinkModel.Title_EN` [get], [set]

Gets or sets the english title of the link.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Link/LinkModel.cs

5.45 CampusAppWP8.Pages.Links.LinkPage Class Reference

Class for the [LinkPage](#)

Inheritance diagram for CampusAppWP8.Pages.Links.LinkPage:



Public Member Functions

- [LinkPage](#) ()

Initializes a new instance of the [LinkPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the OnNavigatedTo method
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom method

5.45.1 Detailed Description

Class for the [LinkPage](#)

5.45.2 Constructor & Destructor Documentation

5.45.2.1 CampusAppWP8.Pages.Links.LinkPage.LinkPage ()

Initializes a new instance of the [LinkPage](#) class.

5.45.3 Member Function Documentation

5.45.3.1 override void CampusAppWP8.Pages.Links.LinkPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

5.45.3.2 override void CampusAppWP8.Pages.Links.LinkPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the OnNavigatedTo method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Links/LinkPage.-xaml.cs

5.46 CampusAppWP8.Model.Utility.ListPickerListModel Class Reference

Class for a List of ListPickerItems

Inheritance diagram for CampusAppWP8.Model.Utility.ListPickerListModel:



Public Member Functions

- [ListPickerListModel](#) ()

- Initializes a new instance of the [ListPickerItemListModel](#) class.*
- virtual int [GetIndexOrDefault](#) (string value)
Method return a the Index of an item which has a certain value
- void [AddItem](#) (string value, string text)
add an new item to the list
- void [AddItem](#) ([ListPickerItemModel](#) item)
add an new item to the list
- bool [RemoveItem](#) (string value, string text)
remove an item
- bool [RemoveItem](#) ([ListPickerItemModel](#) item)
remove an item

Protected Member Functions

- virtual void [LoadList](#) ()
Method load an default list

Properties

- List< [ListPickerItemModel](#) > [List](#) [get, set]
Gets or sets the ItemList

5.46.1 Detailed Description

Class for a List of ListPickerItems

5.46.2 Constructor & Destructor Documentation

5.46.2.1 CampusAppWP8.Model.Utility.ListPickerItemListModel.ListPickerItemListModel ()

Initializes a new instance of the [ListPickerItemListModel](#) class.

5.46.3 Member Function Documentation

5.46.3.1 void CampusAppWP8.Model.Utility.ListPickerItemListModel.AddItem (string value, string text)

add an new item to the list

Parameters

<i>value</i>	value of the item
<i>text</i>	text of the item

5.46.3.2 void CampusAppWP8.Model.Utility.ListPickerItemListModel.AddItem (ListPickerItemModel item)

add an new item to the list

Parameters

<i>item</i>	new item of the list
-------------	----------------------

5.46.3.3 `virtual int CampusAppWP8.Model.Utility.ListPickerItemListModel.GetIndexOrDefault (string value) [virtual]`

Method return a the Index of an item which has a certain value

Parameters

<i>value</i>	a certain value
--------------	-----------------

Returns

return index of value or default(0)

5.46.3.4 `virtual void CampusAppWP8.Model.Utility.ListPickerItemListModel.LoadList () [protected],[virtual]`

Method load an default list

load an empty list

Reimplemented in [CampusAppWP8.Model.Utility.CampusListPickerItemListModel](#), [CampusAppWP8.Model.Utility.-CourseListPickerItemListModel](#), [CampusAppWP8.Model.Utility.DegreeListPickerItemListModel](#), [CampusAppWP8.-Model.Utility.RoleListPickerItemListModel](#), and [CampusAppWP8.Model.Utility.SemesterListPickerItemListModel](#).

5.46.3.5 `bool CampusAppWP8.Model.Utility.ListPickerItemListModel.RemoveItem (string value, string text)`

remove an item

Parameters

<i>value</i>	value of the item
<i>text</i>	text of the item

Returns

true if removing was successful, otherwise false

5.46.3.6 `bool CampusAppWP8.Model.Utility.ListPickerItemListModel.RemoveItem (ListPickerItemModel item)`

remove an item

Parameters

<i>item</i>	item which has to be remove
-------------	-----------------------------

Returns

true if removing was successful, otherwise false

5.46.4 Property Documentation

5.46.4.1 `List<ListPickerItemModel> CampusAppWP8.Model.Utility.ListPickerItemListModel.List [get],[set]`

Gets or sets the ItemList

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/ListPickerItemModel.cs

5.47 CampusAppWP8.Model.Utility.ListPickerItemModel Class Reference

Model for the ListPickerItems

Public Member Functions

- [ListPickerItemModel](#) ()
Initializes a new instance of the [ListPickerItemModel](#) class.
- [ListPickerItemModel](#) (string value, string text)
Initializes a new instance of the [ListPickerItemModel](#) class.

Properties

- string [Value](#) [get, set]
Gets or sets the Value of an Item
- string [Text](#) [get, set]
Gets or sets the Text (caption) of an Item

5.47.1 Detailed Description

Model for the ListPickerItems

5.47.2 Constructor & Destructor Documentation

5.47.2.1 CampusAppWP8.Model.Utility.ListPickerItemModel.ListPickerItemModel ()

Initializes a new instance of the [ListPickerItemModel](#) class.

5.47.2.2 CampusAppWP8.Model.Utility.ListPickerItemModel.ListPickerItemModel (string value, string text)

Initializes a new instance of the [ListPickerItemModel](#) class.

Parameters

<i>value</i>	string for the value property of an item
<i>text</i>	string for the text property of an item

5.47.3 Property Documentation

5.47.3.1 string CampusAppWP8.Model.Utility.ListPickerItemModel.Text [get], [set]

Gets or sets the Text (caption) of an Item

5.47.3.2 `string CampusAppWP8.Model.Utility.ListPickerItemModel.Value` `[get]`, `[set]`

Gets or sets the Value of an Item

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/ListPickerItemModel.cs`

5.48 CampusAppWP8.LocalizedStrings Class Reference

Bietet Zugriff auf Zeichenfolgenressourcen.

Properties

- [AppResources](#) **LocalizedResources** `[get]`

5.48.1 Detailed Description

Bietet Zugriff auf Zeichenfolgenressourcen.

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/LocalizedStrings.cs`

5.49 CampusAppWP8.Utility.Logger Class Reference

This Class creates logs for the app

Static Public Member Functions

- static void [LogException](#) (Exception exception)
Method log a Exception
- static void [LogMsg](#) (string msg)
Log a message.

5.49.1 Detailed Description

This Class creates logs for the app

5.49.2 Member Function Documentation

5.49.2.1 `static void CampusAppWP8.Utility.Logger.LogException (Exception exception)` `[static]`

Method log a Exception

Parameters

<i>exception</i>	exception which has to log
------------------	----------------------------

5.49.2.2 static void CampusAppWP8.Utility.Logger.LogMsg (string msg) [static]

Log a message.

Parameters

<i>msg</i>	to be logged message
------------	----------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Logger.cs

5.50 CampusAppWP8.MainModel< T > Class Template Reference

Base model io handling class.

Inheritance diagram for CampusAppWP8.MainModel< T >:

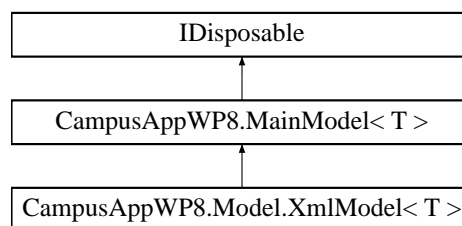

Public Types

- enum [ModelType](#) { [ModelType.INVALID](#) = 0, [ModelType.File](#) = 1, [ModelType.Feed](#) = 2, [ModelType.FileAndFeed](#) = 3 }

Specifies the I/O type of the model.

Public Member Functions

- [MainModel](#) ([ModelType](#) modelType, string fileName, string url)
Initializes a new instance of the MainModel{T} class.
- [MainModel](#) ([ModelType](#) modelType, string sourceName)
Initializes a new instance of the MainModel{T} class.
- delegate void [OnLoading](#) ()
Delegate of the OnLoading callback function.
- delegate void [OnLoaded](#) ()
Delegate of the OnLoaded callback function.
- delegate void [OnSaving](#) ()
Delegate of the OnSaving callback function.
- delegate void [OnSaved](#) ()
Delegate of the OnSaved callback function.
- delegate void [OnFailed](#) ()
Delegate of the OnFailed(File/Web) callback function.
- delegate bool [IsModelUpToDate](#) (T model)

- Delegate of the IsModelUpToDate callback function.*
- delegate bool [IsFileUpToDate](#) (T model, FileInfo fileInfo)
 - Delegate of the IsFileUpToDate callback function.*
- void [Dispose](#) ()
 - Called before finalizing. Can maybe be removed.*
- void [ForceWebUpdate](#) ()
 - Forces a update from web.*
- void [ForceReadFile](#) ()
 - Forces a update from file.*
- void [LoadData](#) ()
 - Load the data if necessary, from web or from file, regarding if the file data is up to date.*
- void [SaveData](#) (bool force=false)
 - Save the model data if necessary.*
- [ModelType](#) [GetModelType](#) ()
 - Return the model io type.*
- T [GetModel](#) ()
 - Return the model.*
- void [SetUriParams](#) (List< [UriParamModel](#) > parameters)
 - Create the parameterized uri.*
- void [ClearUriParams](#) ()
 - Clear the parameterized uri.*

Protected Member Functions

- abstract bool [DeserializeModel](#) (byte[] modelData)
 - Abstract declaration of the model deserialize function.*
- abstract byte[] [SerializeModel](#) ()
 - Abstract declaration of the model serialize function.*
- bool [IsFile](#) ()
 - Check if the model io type is file.*
- bool [IsHttpApi](#) ()
 - Check if the model io type is feed.*

Properties

- T [Model](#) [get, set]
 - Gets or sets the [Model](#).*

Events

- [OnLoading](#) [onLoading](#) = null
 - Callback pointer, called before loading.*
- [OnLoaded](#) [onLoaded](#) = null
 - Callback pointer, called after loading.*
- [OnSaving](#) [onSaving](#) = null
 - Callback pointer, called before saving.*
- [OnSaved](#) [onSaved](#) = null
 - Callback pointer, called after saving.*
- [OnFailed](#) [onFailedFile](#) = null
 - Callback pointer, called after failed file loading.*

- **OnFailed onFailedWeb** = null
Callback pointer, called after failed web loading.
- **OnFailed onFailed** = null
Callback pointer, called after failed file or web loading, if there is no specialized onFailed callback set.
- **OnFailed onFailedSave** = null
Callback pointer, called after failed saving data to file.
- **IsFileUpToDate isFileUpToDateOnLoad** = null
Callback pointer, for checking if file is up to date at loading.
- **IsFileUpToDate isFileUpToDateOnSave** = null
Callback pointer, for checking if file is up to date at saving.
- **IsModelUpToDate isModelUpToDateOnLoad** = null
Callback pointer, for checking if model is up to date at loading.
- **IsModelUpToDate isModelUpToDateOnSave** = null
Callback pointer, for checking if model is up to date at saving. (currently unused)

5.50.1 Detailed Description

Base model io handling class.

Template Parameters

<i>T</i>	model type
----------	------------

5.50.2 Member Enumeration Documentation

5.50.2.1 enum CampusAppWP8.MainModel< T >.ModelType

Specifies the I/O type of the model.

Enumerator

INVALID Invalid/unset state.

File File only (01).

Feed **Feed** only (10).

FileAndFeed File and feed (11).

5.50.3 Constructor & Destructor Documentation

5.50.3.1 CampusAppWP8.MainModel< T >.MainModel (ModelType modelType, string fileName, string url)

Initializes a new instance of the MainModel{T} class.

Parameters

<i>modelType</i>	Model IO type
<i>fileName</i>	name of the file
<i>url</i>	url of the feed

5.50.3.2 CampusAppWP8.MainModel< T >.MainModel (ModelType modelType, string sourceName)

Initializes a new instance of the MainModel{T} class.

Parameters

<i>modelType</i>	Model IO type
<i>sourceName</i>	name of the file or the url of the feed

5.50.4 Member Function Documentation

5.50.4.1 void CampusAppWP8.MainModel< T >.ClearUriParams ()

Clear the parameterized uri.

5.50.4.2 abstract bool CampusAppWP8.MainModel< T >.DeserializeModel (byte[] *modelData*) [protected], [pure virtual]

Abstract declaration of the model deserialize function.

Parameters

<i>modelData</i>	model data as byte array
------------------	--------------------------

Returns

true, is succeeded

Implemented in [CampusAppWP8.Model.XmlModel< T >](#).

5.50.4.3 void CampusAppWP8.MainModel< T >.Dispose ()

Called before finalizing. Can maybe be removed.

5.50.4.4 void CampusAppWP8.MainModel< T >.ForceReadFile ()

Forces a update from file.

5.50.4.5 void CampusAppWP8.MainModel< T >.ForceWebUpdate ()

Forces a update from web.

5.50.4.6 T CampusAppWP8.MainModel< T >.GetModel ()

Return the model.

Returns

model object

5.50.4.7 ModelType CampusAppWP8.MainModel< T >.GetModelType ()

Return the model io type.

Returns

model io type

5.50.4.8 `bool CampusAppWP8.MainModel< T >.IsFile ()` [protected]

Check if the model io type is file.

Returns

true, if the model io type has file.

5.50.4.9 `delegate bool CampusAppWP8.MainModel< T >.IsFileUpToDate (T model, FileInfo fileInfo)`

Delegate of the IsFileUpToDate callback function.

Parameters

<i>model</i>	data model
<i>fileInfo</i>	info of the file

Returns

true, is file is up to date

5.50.4.10 `bool CampusAppWP8.MainModel< T >.IsHttpApi ()` [protected]

Check if the model io type is feed.

Returns

true if the model io type has feed.

5.50.4.11 `delegate bool CampusAppWP8.MainModel< T >.IsModelUpToDate (T model)`

Delegate of the IsModelUpToDate callback function.

Parameters

<i>model</i>	data model
--------------	------------

Returns

true, model is up to date

5.50.4.12 `void CampusAppWP8.MainModel< T >.LoadData ()`

Load the data if necessary, from web or from file, regarding if the file data is up to date.

5.50.4.13 `delegate void CampusAppWP8.MainModel< T >.OnFailed ()`

Delegate of the OnFailed(File/Web) callback function.

5.50.4.14 `delegate void CampusAppWP8.MainModel< T >.OnLoaded ()`

Delegate of the OnLoaded callback function.

5.50.4.15 `delegate void CampusAppWP8.MainModel< T >.OnLoading ()`

Delegate of the OnLoading callback function.

5.50.4.16 `delegate void CampusAppWP8.MainModel< T >.OnSaved ()`

Delegate of the OnSaved callback function.

5.50.4.17 `delegate void CampusAppWP8.MainModel< T >.OnSaving ()`

Delegate of the OnSaving callback function.

5.50.4.18 `void CampusAppWP8.MainModel< T >.SaveData (bool force = false)`

Save the model data if necessary.

Parameters

<i>force</i>	force saving. DEFAULT: false
--------------	------------------------------

5.50.4.19 `abstract byte [] CampusAppWP8.MainModel< T >.SerializeModel () [protected],[pure virtual]`

Abstract declaration of the model serialize function.

Returns

model data as byte array

Implemented in [CampusAppWP8.Model.XmlModel< T >](#).

5.50.4.20 `void CampusAppWP8.MainModel< T >.SetUriParams (List< UriParamModel > parameters)`

Create the parameterized uri.

Parameters

<i>parameters</i>	uri parameter list
-------------------	--------------------

5.50.5 Property Documentation

5.50.5.1 `T CampusAppWP8.MainModel< T >.Model [get],[set]`

Gets or sets the [Model](#).

5.50.6 Event Documentation

5.50.6.1 `IsFileUpToDate CampusAppWP8.MainModel< T >.isFileUpToDateOnLoad = null`

Callback pointer, for checking if file is up to date at loading.

5.50.6.2 `IsFileUpToDate CampusAppWP8.MainModel< T >.isFileUpToDateOnSave = null`

Callback pointer, for checking if file is up to date at saving.

5.50.6.3 IsModelUpToDate CampusAppWP8.MainModel< T >.isModelUpToDateOnLoad = null

Callback pointer, for checking if model is up to date at loading.

5.50.6.4 IsModelUpToDate CampusAppWP8.MainModel< T >.isModelUpToDateOnSave = null

Callback pointer, for checking if model is up to date at saving. (currently unused)

5.50.6.5 OnFailed CampusAppWP8.MainModel< T >.onFailed = null

Callback pointer, called after failed file or web loading, if there is no specialized onFailed callback set.

5.50.6.6 OnFailed CampusAppWP8.MainModel< T >.onFailedFile = null

Callback pointer, called after failed file loading.

5.50.6.7 OnFailed CampusAppWP8.MainModel< T >.onFailedSave = null

Callback pointer, called after failed saving data to file.

5.50.6.8 OnFailed CampusAppWP8.MainModel< T >.onFailedWeb = null

Callback pointer, called after failed web loading.

5.50.6.9 OnLoaded CampusAppWP8.MainModel< T >.onLoaded = null

Callback pointer, called after loading.

5.50.6.10 OnLoading CampusAppWP8.MainModel< T >.onLoading = null

Callback pointer, called before loading.

5.50.6.11 OnSaved CampusAppWP8.MainModel< T >.onSaved = null

Callback pointer, called after saving.

5.50.6.12 OnSaving CampusAppWP8.MainModel< T >.onSaving = null

Callback pointer, called before saving.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/MainModel.cs

5.51 CampusAppWP8.Model.Campusmap.MapModel Class Reference

This Class manage the properties of a Map

Inheritance diagram for CampusAppWP8.Model.Campusmap.MapModel:



Public Member Functions

- [MapModel](#) ()
Initializes a new instance of the [MapModel](#) class.
- Point [GetScrollPoint](#) (Point point)
Method calculate the coordinates of ScrollToOffsets point
- Point [GetScrollPoint](#) (double x, double y)
Method calculate the coordinates of ScrollToOffsets point
- Image [AddPin](#) (double x, double y)
Method create in image, which can show at a certain position
- Image [AddPinFromRefPoint](#) (double x, double y)
Method create in image, which can show at a certain position depend of the [RefPoint](#)
- Image [AddPinFromRefPoint](#) (Point position)
Method create in image, which can show at a certain position depend of the [RefPoint](#)
- Image [AddPin](#) (Point position)
Method create in image, which can show at a certain position
- Point [ConvertToPixelPoint](#) (double x, double y)
Convert a coordinates to coordinates which address pixels
- Point [ConvertToPixelPoint](#) (Point point)
Convert a coordinates to coordinates which address pixels
- Point [ConvertToMapPoint](#) (double x, double y)
Convert a coordinates to coordinates which address mapPoint
- Point [ConvertToMapPoint](#) (Point point)
Convert a coordinates to coordinates which address mapPoint

Properties

- string [ImageSource](#) [get, set]
Gets or sets the ImageSource of the map
- double [ImageWidth](#) [get, set]
Gets or sets the ImageWidth of the map
- double [ImageHeight](#) [get, set]
Gets or sets the ImageHeight of the map
- double [MapImageOffsetX](#) [get, set]
Gets or sets the ImageOffsetX of the map
- double [MapImageOffsetY](#) [get, set]
Gets or sets the ImageOffsetY of the map
- double [GeoOffsetX](#) [get, set]
Gets or sets the GeoOffsetX of the map
- double [GeoOffsetY](#) [get, set]
Gets or sets the GeoOffsetY of the map
- double [ScaleX](#) [get, set]
Gets or sets the Scale (to pixel) of the map
- double [ScaleY](#) [get, set]

Gets or sets the Scale (to pixel) of the map

- Point [RefPoint](#) [get, set]

Gets or sets the reference point

5.51.1 Detailed Description

This Class manage the properties of a Map

5.51.2 Constructor & Destructor Documentation

5.51.2.1 CampusAppWP8.Model.Campusmap.MapModel.MapModel ()

Initializes a new instance of the [MapModel](#) class.

5.51.3 Member Function Documentation

5.51.3.1 Image CampusAppWP8.Model.Campusmap.MapModel.AddPin (double x, double y)

Method create in image, which can show at a certain position

Parameters

<i>x</i>	the x- coordinate
<i>y</i>	the y-coordinate

Returns

image of the pin

5.51.3.2 Image CampusAppWP8.Model.Campusmap.MapModel.AddPin (Point *position*)

Method create in image, which can show at a certain position

Parameters

<i>position</i>	input point
-----------------	-------------

Returns

image of the pin

5.51.3.3 Image CampusAppWP8.Model.Campusmap.MapModel.AddPinFromRefPoint (double x, double y)

Method create in image, which can show at a certain position depend of the [RefPoint](#)

Parameters

<i>x</i>	the x-coordinate
<i>y</i>	the y-coordinate

Returns

image of the pin

5.51.3.4 Image CampusAppWP8.Model.Campusmap.MapModel.AddPinFromRefPoint (Point *position*)

Method create in image, which can show at a certain position depend of the [RefPoint](#)

Parameters

<i>position</i>	input point
-----------------	-------------

Returns

image of the pin

5.51.3.5 Point CampusAppWP8.Model.Campusmap.MapModel.ConvertToMapPoint (double x, double y)

Convert a coordinates to coordinates which address mapPoint

Parameters

<i>x</i>	the x-coordinate
<i>y</i>	the y-coordinate

Returns

Point in pixel-size

5.51.3.6 Point CampusAppWP8.Model.Campusmap.MapModel.ConvertToMapPoint (Point point)

Convert a coordinates to coordinates which address mapPoint

Parameters

<i>point</i>	not scaled point
--------------	------------------

Returns

Point in pixel-size

5.51.3.7 Point CampusAppWP8.Model.Campusmap.MapModel.ConvertToPixelPoint (double x, double y)

Convert a coordinates to coordinates which address pixels

Parameters

<i>x</i>	the x-coordinate
<i>y</i>	the y-coordinate

Returns

Point in pixel-size

5.51.3.8 Point CampusAppWP8.Model.Campusmap.MapModel.ConvertToPixelPoint (Point point)

Convert a coordinates to coordinates which address pixels

Parameters

<i>point</i>	not scaled point
--------------	------------------

d

Returns

Point in pixel-size

5.51.3.9 Point CampusAppWP8.Model.Campusmap.MapModel.GetScrollPoint (Point *point*)

Method calculate the coordinates of ScrollToOffsets point

Parameters

<i>point</i>	input point
--------------	-------------

Returns

point (in pixel)

5.51.3.10 Point CampusAppWP8.Model.Campusmap.MapModel.GetScrollPoint (double *x*, double *y*)

Method calculate the coordinates of ScrollToOffsets point

the input-point will be shown in the center

Parameters

<i>x</i>	x - coordinate
<i>y</i>	y - coordinate

Returns

point (in pixel)

5.51.4 Property Documentation

5.51.4.1 double CampusAppWP8.Model.Campusmap.MapModel.GeoOffsetX [get], [set]

Gets or sets the GeoOffsetX of the map

5.51.4.2 double CampusAppWP8.Model.Campusmap.MapModel.GeoOffsetY [get], [set]

Gets or sets the GeoOffsetY of the map

5.51.4.3 double CampusAppWP8.Model.Campusmap.MapModel.ImageHeight [get], [set]

Gets or sets the ImageHeight of the map

5.51.4.4 string CampusAppWP8.Model.Campusmap.MapModel.ImageSource [get], [set]

Gets or sets the ImageSource of the map

5.51.4.5 double CampusAppWP8.Model.Campusmap.MapModel.ImageWidth [get], [set]

Gets or sets the ImageWidth of the map

5.51.4.6 double `CampusAppWP8.Model.Campusmap.MapModel.MapImageOffsetX` [get], [set]

Gets or sets the ImageOffsetX of the map

5.51.4.7 double `CampusAppWP8.Model.Campusmap.MapModel.MapImageOffsetY` [get], [set]

Gets or sets the ImageOffsetY of the map

5.51.4.8 Point `CampusAppWP8.Model.Campusmap.MapModel.RefPoint` [get], [set]

Gets or sets the reference point

5.51.4.9 double `CampusAppWP8.Model.Campusmap.MapModel.ScaleX` [get], [set]

Gets or sets the Scale (to pixel) of the map

5.51.4.10 double `CampusAppWP8.Model.Campusmap.MapModel.ScaleY` [get], [set]

Gets or sets the Scale (to pixel) of the map

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Campusmap/Map-Model.cs

5.52 CampusAppWP8.Model.Campusmap.MapPinModel Class Reference

This Class manage the properties of a MapPin

Public Member Functions

- [MapPinModel](#) ()
Initializes a new instance of the [MapPinModel](#) class.

Properties

- string [ImageSource](#) [get, set]
Gets or sets the ImageSource of the pin
- double [ImageWidth](#) [get, set]
Gets or sets the ImageWidth of the pin
- double [ImageHeight](#) [get, set]
Gets or sets the ImageHeight of the pin
- double [PinImageOffsetX](#) [get, set]
Gets or sets the ImageOffsetX of the pin
- double [PinImageOffsetY](#) [get, set]
Gets or sets the ImageOffsetY of the pin
- Point [Position](#) [get, set]
Gets or sets position of the pin

5.52.1 Detailed Description

This Class manage the properties of a MapPin

5.52.2 Constructor & Destructor Documentation

5.52.2.1 CampusAppWP8.Model.Campusmap.MapPinModel.MapPinModel ()

Initializes a new instance of the [MapPinModel](#) class.

5.52.3 Property Documentation

5.52.3.1 double CampusAppWP8.Model.Campusmap.MapPinModel.ImageHeight [get], [set]

Gets or sets the ImageHeight of the pin

5.52.3.2 string CampusAppWP8.Model.Campusmap.MapPinModel.ImageSource [get], [set]

Gets or sets the ImageSource of the pin

5.52.3.3 double CampusAppWP8.Model.Campusmap.MapPinModel.ImageWidth [get], [set]

Gets or sets the ImageWidth of the pin

5.52.3.4 double CampusAppWP8.Model.Campusmap.MapPinModel.PinImageOffsetX [get], [set]

Gets or sets the ImageOffsetX of the pin

5.52.3.5 double CampusAppWP8.Model.Campusmap.MapPinModel.PinImageOffsetY [get], [set]

Gets or sets the ImageOffsetY of the pin

5.52.3.6 Point CampusAppWP8.Model.Campusmap.MapPinModel.Position [get], [set]

Gets or sets position of the pin

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Campusmap/MapPinModel.cs

5.53 CampusAppWP8.Model.Mensa.MealModel Class Reference

[Model](#) for a meal

Properties

- int [MealId](#) [get, set]
Gets or sets the mealId
- string [MealName](#) [get]

Gets the mealName

- string `IconName` [get, set]

Gets or sets the iconName

- string `IconUrl` [get]

Gets the iconUrl

- string `MealDesc` [get, set]

Gets or sets the mealDescription

5.53.1 Detailed Description

[Model](#) for a meal

5.53.2 Property Documentation

5.53.2.1 string `CampusAppWP8.Model.Mensa.MealModel.IconName` [get], [set]

Gets or sets the iconName

5.53.2.2 string `CampusAppWP8.Model.Mensa.MealModel.IconUrl` [get]

Gets the iconUrl

5.53.2.3 string `CampusAppWP8.Model.Mensa.MealModel.MealDesc` [get], [set]

Gets or sets the mealDescription

5.53.2.4 int `CampusAppWP8.Model.Mensa.MealModel.MealId` [get], [set]

Gets or sets the mealId

ValueRange : 0 - 7

5.53.2.5 string `CampusAppWP8.Model.Mensa.MealModel.MealName` [get]

Gets the mealName


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Mensa/MealModel.-cs

5.54 CampusAppWP8.Feed.Mensa.MensaFeed Class Reference

This Class is for MensaFeeds

Inheritance diagram for `CampusAppWP8.Feed.Mensa.MensaFeed`:



Static Public Member Functions

- static [MensaFeed](#) `CreateCampusMensaFeed` (`CampusAppWP8.Model.Setting.UserProfilModel.Campus campus`)

Method creates a [MensaFeed](#) depends of certain Campus

Protected Member Functions

- [MensaFeed](#) (`string fileName, string feedUrl`)

Initializes a new instance of the [MensaFeed](#) class.

5.54.1 Detailed Description

This Class is for MensaFeeds

5.54.2 Constructor & Destructor Documentation

5.54.2.1 `CampusAppWP8.Feed.Mensa.MensaFeed.MensaFeed (string fileName, string feedUrl)` [protected]

Initializes a new instance of the [MensaFeed](#) class.

Parameters

<i>fileName</i>	name of the file
<i>feedUrl</i>	url of the feed

5.54.3 Member Function Documentation

5.54.3.1 `static MensaFeed CampusAppWP8.Feed.Mensa.MensaFeed.CreateCampusMensaFeed (CampusAppWP8.Model.Setting.UserProfilModel.Campus campus)` [static]

Method creates a [MensaFeed](#) depends of certain Campus

Parameters

<i>campus</i>	camus parameter
---------------	-----------------

Returns

the correct mensaFeed


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Mensa/MensaFeed.-cs`

5.55 CampusAppWP8.Feed.Mensa.MensaFeedCBMain Class Reference

[MensaFeed](#) for main campus of cottbus

Inheritance diagram for `CampusAppWP8.Feed.Mensa.MensaFeedCBMain`:

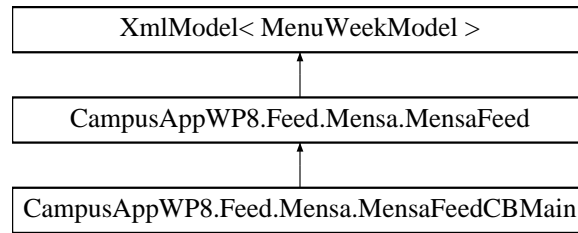

Public Member Functions

- [MensaFeedCBMain \(\)](#)

Initializes a new instance of the [MensaFeedCBMain](#) class.

Additional Inherited Members

5.55.1 Detailed Description

[MensaFeed](#) for main campus of cottbus

5.55.2 Constructor & Destructor Documentation

5.55.2.1 CampusAppWP8.Feed.Mensa.MensaFeedCBMain.MensaFeedCBMain ()

Initializes a new instance of the [MensaFeedCBMain](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Mensa/MensaFeedCBMain.cs

5.56 CampusAppWP8.Feed.Mensa.MensaFeedCBNorth Class Reference

[MensaFeed](#) for main campus of cottbus

Inheritance diagram for CampusAppWP8.Feed.Mensa.MensaFeedCBNorth:

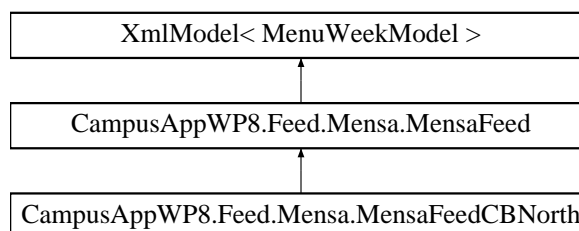

Public Member Functions

- [MensaFeedCBNorth \(\)](#)

Initializes a new instance of the [MensaFeedCBNorth](#) class.

Additional Inherited Members

5.56.1 Detailed Description

[MensaFeed](#) for main campus of cottbus

5.56.2 Constructor & Destructor Documentation

5.56.2.1 CampusAppWP8.Feed.Mensa.MensaFeedCBNorth.MensaFeedCBNorth ()

Initializes a new instance of the [MensaFeedCBNorth](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Mensa/MensaFeedCBNorth.cs

5.57 CampusAppWP8.Feed.Mensa.MensaFeedCBSouth Class Reference

[MensaFeed](#) for main campus of cottbus

Inheritance diagram for CampusAppWP8.Feed.Mensa.MensaFeedCBSouth:

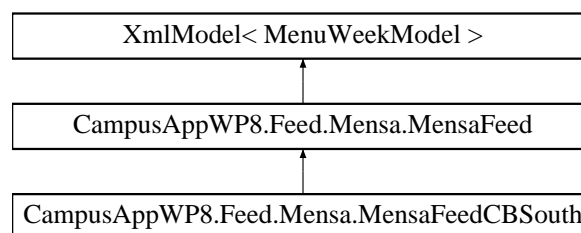

Public Member Functions

- [MensaFeedCBSouth](#) ()
Initializes a new instance of the [MensaFeedCBSouth](#) class.

Additional Inherited Members

5.57.1 Detailed Description

[MensaFeed](#) for main campus of cottbus

5.57.2 Constructor & Destructor Documentation

5.57.2.1 CampusAppWP8.Feed.Mensa.MensaFeedCBSouth.MensaFeedCBSouth ()

Initializes a new instance of the [MensaFeedCBSouth](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Mensa/MensaFeedCBSouth.cs

5.58 CampusAppWP8.Feed.Mensa.MensaFeedSBFMain Class Reference

[MensaFeed](#) for main campus of cottbus

Inheritance diagram for CampusAppWP8.Feed.Mensa.MensaFeedSBFMain:

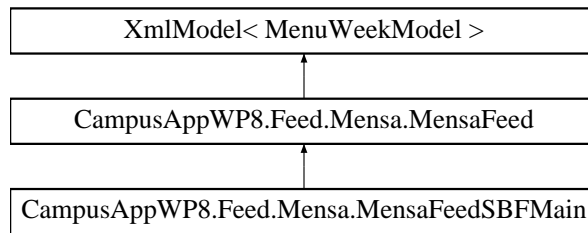

Public Member Functions

- [MensaFeedSBFMain](#) ()
Initializes a new instance of the [MensaFeedSBFMain](#) class.

Additional Inherited Members

5.58.1 Detailed Description

[MensaFeed](#) for main campus of cottbus

5.58.2 Constructor & Destructor Documentation

5.58.2.1 CampusAppWP8.Feed.Mensa.MensaFeedSBFMain.MensaFeedSBFMain ()

Initializes a new instance of the [MensaFeedSBFMain](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Mensa/MensaFeedSBFMain.cs

5.59 CampusAppWP8.Pages.Mensa.MensaPage Class Reference

Class for the [MensaPage](#)

Inheritance diagram for CampusAppWP8.Pages.Mensa.MensaPage:



Public Member Functions

- [MensaPage](#) ()
Initializes a new instance of the [MensaPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the OnNavigatedTo method
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom method

5.59.1 Detailed Description

Class for the [MensaPage](#)

5.59.2 Constructor & Destructor Documentation

5.59.2.1 CampusAppWP8.Pages.Mensa.MensaPage.MensaPage ()

Initializes a new instance of the [MensaPage](#) class.

5.59.3 Member Function Documentation

5.59.3.1 override void CampusAppWP8.Pages.Mensa.MensaPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

5.59.3.2 override void CampusAppWP8.Pages.Mensa.MensaPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the OnNavigatedTo method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Mensa/MensaPage.xaml.cs

5.60 CampusAppWP8.Model.Mensa.MenuModel Class Reference

[Model](#) for menu

Public Member Functions

- [MenuModel](#) ()
Initializes a new instance of the [MenuModel](#) class.

Properties

- `ObservableCollection< MealModel > Meals` [get, set]
Gets or sets the menus for the week
- `string Day` [get, set]
Gets or sets the WeekDay
- `string Date` [get, set]
Gets or sets of Date

5.60.1 Detailed Description

[Model](#) for menu

5.60.2 Constructor & Destructor Documentation

5.60.2.1 `CampusAppWP8.Model.Mensa.MenuModel.MenuModel ()`

Initializes a new instance of the [MenuModel](#) class.

5.60.3 Property Documentation

5.60.3.1 `string CampusAppWP8.Model.Mensa.MenuModel.Date` [get], [set]

Gets or sets of Date

5.60.3.2 `string CampusAppWP8.Model.Mensa.MenuModel.Day` [get], [set]

Gets or sets the WeekDay

5.60.3.3 `ObservableCollection<MealModel> CampusAppWP8.Model.Mensa.MenuModel.Meals` [get], [set]

Gets or sets the menus for the week

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Mensa/MenuModel.-cs`

5.61 CampusAppWP8.Model.Mensa.MenuWeekModel Class Reference

[Model](#) for menus in one week

Public Member Functions

- `MenuWeekModel ()`
Initializes a new instance of the [MenuWeekModel](#) class.

Static Public Member Functions

- `static DateTime CalcFirstWeekDay ()`
Method calculate this day of the week, which its gets new menus

Properties

- `ObservableCollection< MenuModel > Menus` [get, set]
Gets or sets the menus for the week
- `DateTime CreateTime` [get]
Gets the creation time of the model

5.61.1 Detailed Description

[Model](#) for menus in one week

5.61.2 Constructor & Destructor Documentation

5.61.2.1 `CampusAppWP8.Model.Mensa.MenuWeekModel.MenuWeekModel ()`

Initializes a new instance of the [MenuWeekModel](#) class.

5.61.3 Member Function Documentation

5.61.3.1 `static DateTime CampusAppWP8.Model.Mensa.MenuWeekModel.CalcFirstWeekDay ()` [static]

Method calculate this day of the week, which its gets new menus

Returns

Date of NewMenuWeekDay

5.61.4 Property Documentation

5.61.4.1 `DateTime CampusAppWP8.Model.Mensa.MenuWeekModel.CreateTime` [get]

Gets the creation time of the model

5.61.4.2 `ObservableCollection<MenuModel> CampusAppWP8.Model.Mensa.MenuWeekModel.Menus` [get], [set]

Gets or sets the menus for the week

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Mensa/MenuWeek-Model.cs`

5.62 CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes Class Reference

Class creates some [MessageBoxes](#)

Static Public Member Functions

- `static MessageBoxResult ShowGoeWatchOptInBox ()`
Method show the MessageBox for the GeoWatch-OptIn
- `static MessageBoxResult ShowMainModelErrorMessageBox (string text)`
Method show the MessageBox for the ErrorMessageBox

5.62.1 Detailed Description

Class creates some [MessageBoxes](#)

5.62.2 Member Function Documentation

5.62.2.1 `static MessageBoxResult CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes.ShowGoeWatchOptInBox ()`
`[static]`

Method show the MessageBox for the GeoWatch-OptIn

Returns

result of the UserInteraction

5.62.2.2 `static MessageBoxResult CampusAppWP8.Utility.Lui.MessageBoxes.MessageBoxes.ShowMainModelErrorMessageBox (string text)` `[static]`

Method show the MessageBox for the ErrorMessageBox

Parameters

<i>text</i>	custom text for the box
-------------	-------------------------

Returns

result of the UserInteraction


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/MessageBoxes/MessageBoxes.cs

5.63 CampusAppWP8.Pages.Lecture.ModulWebPage Class Reference

Class for the page which shows Webpages from the BaseAddress [Constants.UrlLecture_ModulBaseAddr](#)

Inheritance diagram for CampusAppWP8.Pages.Lecture.ModulWebPage:



Public Member Functions

- [ModulWebPage](#) ()
Initializes a new instance of the [ModulWebPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the [OnNavigatedTo](#) method

5.63.1 Detailed Description

Class for the page which shows Webpages from the BaseAddress [Constants.UrlLecture_ModulBaseAddr](#)

5.63.2 Constructor & Destructor Documentation

5.63.2.1 CampusAppWP8.Pages.Lecture.ModulWebPage.ModulWebPage ()

Initializes a new instance of the [ModulWebPage](#) class.

5.63.3 Member Function Documentation

5.63.3.1 override void CampusAppWP8.Pages.Lecture.ModulWebPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the OnNavigatedTo method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Lecture/ModulWebPage.xaml.cs

5.64 CampusAppWP8.Utility.Lui.Button.NavigateButton Class Reference

This class create an [Button](#) which navigate to a certain page

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.NavigateButton:



Public Member Functions

- [NavigateButton](#) ()
Initializes a new instance of the [NavigateButton](#) class.

Static Public Attributes

- static readonly DependencyProperty [NavigateProperty](#) = DependencyProperty.Register("Url", typeof(object), typeof([NavigateButton](#)), new PropertyMetadata(false))
Register the UrlProperty
- static readonly DependencyProperty [QueryValueProperty](#) = DependencyProperty.Register("QueryString-Value", typeof(object), typeof([NavigateButton](#)), new PropertyMetadata(false))
Register the QueryValueProperty
- static readonly DependencyProperty [QueryNameProperty](#) = DependencyProperty.Register("QueryString-Name", typeof(object), typeof([NavigateButton](#)), new PropertyMetadata(false))
Register the QueryNameProperty

Protected Member Functions

- override void [OnClick](#) ()
Overrides the OnClick-Method from button

Properties

- object [Url](#) [get, set]
Gets or sets the Url
- object [QueryStringName](#) [get, set]
Gets or sets the QueryStringName
- object [QueryStringValue](#) [get, set]
Gets or sets the QueryStringValue

5.64.1 Detailed Description

This class create an [Button](#) which navigate to a certain page

5.64.2 Constructor & Destructor Documentation

5.64.2.1 CampusAppWP8.Utility.Lui.Button.NavigateButton.NavigateButton ()

Initializes a new instance of the [NavigateButton](#) class.

5.64.3 Member Function Documentation

5.64.3.1 override void CampusAppWP8.Utility.Lui.Button.NavigateButton.OnClick () [protected]

Overrides the OnClick-Method from button

now method navigate to a certain page

5.64.4 Member Data Documentation

5.64.4.1 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.NavigateButton.NavigateProperty = DependencyProperty.Register("Url", typeof(object), typeof(NavigateButton), new PropertyMetadata(false)) [static]

Register the UrlProperty

5.64.4.2 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.NavigateButton.QueryNameProperty = DependencyProperty.Register("QueryStringName", typeof(object), typeof(NavigateButton), new PropertyMetadata(false)) [static]

Register the QueryNameProperty

5.64.4.3 readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.NavigateButton.QueryValueProperty = DependencyProperty.Register("QueryStringValue", typeof(object), typeof(NavigateButton), new PropertyMetadata(false)) [static]

Register the QueryValueProperty

5.64.5 Property Documentation

5.64.5.1 object `CampusAppWP8.Utility.Lui.Button.NavigateButton.QueryStringName` [get], [set]

Gets or sets the `QueryStringName`

5.64.5.2 object `CampusAppWP8.Utility.Lui.Button.NavigateButton.QueryStringValue` [get], [set]

Gets or sets the `QueryStringValue`

5.64.5.3 object `CampusAppWP8.Utility.Lui.Button.NavigateButton.Url` [get], [set]

Gets or sets the `Url`


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/NavigateButton.cs`

5.65 CampusAppWP8.Feed.News.NewsFeed Class Reference

[News Feed](#).

Inheritance diagram for `CampusAppWP8.Feed.News.NewsFeed`:



Public Member Functions

- [NewsFeed](#) (bool `autoLoad`=true)
Initializes a new instance of the [NewsFeed](#) class.

5.65.1 Detailed Description

[News Feed](#).

5.65.2 Constructor & Destructor Documentation

5.65.2.1 `CampusAppWP8.Feed.News.NewsFeed.NewsFeed (bool autoLoad = true)`

Initializes a new instance of the [NewsFeed](#) class.

Parameters

<i>autoLoad</i>	automatic loading of the data
-----------------	-------------------------------


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/News/NewsFeed.cs`

5.66 CampusAppWP8.Pages.News.NewsIndexPage Class Reference

Overview page of all news.

Inheritance diagram for CampusAppWP8.Pages.News.NewsIndexPage:



Public Member Functions

- [NewsIndexPage \(\)](#)
Initializes a new instance of the [NewsIndexPage](#) class.

Static Public Member Functions

- static [NewsFeed GetNewsFeed \(\)](#)
Return the newsFeed object.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page, creates a FeedEventHandler and load the RSS feed data.

Properties

- static [NewsFeed Feed](#) [get, set]
Gets or sets the feed object.

5.66.1 Detailed Description

Overview page of all news.

5.66.2 Constructor & Destructor Documentation

5.66.2.1 CampusAppWP8.Pages.News.NewsIndexPage.NewsIndexPage ()

Initializes a new instance of the [NewsIndexPage](#) class.

5.66.3 Member Function Documentation

5.66.3.1 static NewsFeed CampusAppWP8.Pages.News.NewsIndexPage.GetNewsFeed () [static]

Return the newsFeed object.

Returns

news feed object

5.66.3.2 `override void CampusAppWP8.Pages.News.NewsIndexPage.OnNavigatedTo (NavigationEventArgs e)`
[protected]

On navigation to this page, creates a `FeedEventHandler` and load the RSS feed data.

Parameters

<i>e</i>	event args
----------	------------

5.66.4 Property Documentation

5.66.4.1 NewsFeed CampusAppWP8.Pages.News.NewsIndexPath.Feed [static], [get], [set]

Gets or sets the feed object.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/News/NewsIndexPath.xaml.cs

5.67 CampusAppWP8.Pages.News.NewsPage Class Reference

EventPage, where every news fees has his own PivotItem.

Inheritance diagram for CampusAppWP8.Pages.News.NewsPage:



Public Member Functions

- [NewsPage](#) ()
Initializes a new instance of the [NewsPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
On navigation to this page. The PivotItem source will be set, if it wasn't before. Navigating to the submitted index of the chosen PivotItem page.
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Overrides the OnNavigatedFrom function.

5.67.1 Detailed Description

EventPage, where every news fees has his own PivotItem.

5.67.2 Constructor & Destructor Documentation

5.67.2.1 CampusAppWP8.Pages.News.NewsPage.NewsPage ()

Initializes a new instance of the [NewsPage](#) class.

5.67.3 Member Function Documentation

5.67.3.1 `override void CampusAppWP8.Pages.News.NewsPage.OnNavigatedFrom (NavigationEventArgs e)`
[protected]

Overrides the OnNavigatedFrom function.

Parameters

<i>e</i>	event args
----------	------------

5.67.3.2 override void CampusAppWP8.Pages.News.NewsPage.OnNavigatedTo (NavigationEventArgs *e*) [protected]

On navigation to this page. The PivotItem source will be set, if it wasn't before. Navigating to the submitted index of the chosen PivotItem page.

Parameters

<i>e</i>	Event Args
----------	------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/News/NewsPage.-xaml.cs

5.68 CampusAppWP8.Feed.Openinghours.OpeninghoursFeed Class Reference

This Class is for MesaFeeds

Inheritance diagram for CampusAppWP8.Feed.Openinghours.OpeninghoursFeed:



Public Member Functions

- [OpeninghoursFeed \(\)](#)
Initializes a new instance of the [OpeninghoursFeed](#) class.

5.68.1 Detailed Description

This Class is for MesaFeeds

5.68.2 Constructor & Destructor Documentation

5.68.2.1 CampusAppWP8.Feed.Openinghours.OpeninghoursFeed.OpeninghoursFeed ()

Initializes a new instance of the [OpeninghoursFeed](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/Openinghours/Openinghours-Feed.cs

5.69 CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel Class Reference

[Model](#) for menu

Public Member Functions

- [OpeninghoursInstitutionModel](#) ()
Initializes a new instance of the [OpeninghoursInstitutionModel](#) class.

Properties

- string [Title_DE](#) [get, set]
Gets or sets the german title of the institution.
- string [Title_EN](#) [get, set]
Gets or sets the english title of the institution.
- string [Monday](#) [get, set]
Gets or sets the open hours on monday.
- string [Tuesday](#) [get, set]
Gets or sets the open hours on tuesday.
- string [Wednesday](#) [get, set]
Gets or sets the open hours on wednesday.
- string [Thursday](#) [get, set]
Gets or sets the open hours on thursday.
- string [Friday](#) [get, set]
Gets or sets the open hours on friday.
- string [Saturday](#) [get, set]
Gets or sets the open hours on saturday.
- string [Sunday](#) [get, set]
Gets or sets the open hours on sunday.
- string [EMail](#) [get, set]
Gets or sets the email address of the institution.
- string [Phone](#) [get, set]
Gets or sets the phone number of the institution.
- string [Building](#) [get, set]
Gets or sets the building where the institution is located.
- string [Room](#) [get, set]
Gets or sets the room where the institution is located.
- string [Comment_DE](#) [get, set]
Gets or sets the german comment.
- string [Comment_EN](#) [get, set]
Gets or sets the english comment.
- string [Title](#) [get]
Gets the localized title. If the phone is set to german language, the german title will be returned otherwise the english title.
- string [Comment](#) [get]
Gets the localized comment. if the phone is set to german language, the german comment will be returned otherwise the english comment.
- string [EMailTitle](#) [get]
Gets a string containing the email address and the institution title separated by ':'.

- string [PhoneTitle](#) [get]
Gets a string containing the phone number and the institution title separated by ':
- Visibility [VisibleMonday](#) [get]
Gets the visibility state of the monday TextBlock.
- Visibility [VisibleTuesday](#) [get]
Gets the visibility state of the tuesday TextBlock.
- Visibility [VisibleWednesday](#) [get]
Gets the visibility state of the wednesday TextBlock.
- Visibility [VisibleThursday](#) [get]
Gets the visibility state of the thursday TextBlock.
- Visibility [VisibleFriday](#) [get]
Gets the visibility state of the friday TextBlock.
- Visibility [VisibleSaturday](#) [get]
Gets the visibility state of the saturday TextBlock.
- Visibility [VisibleSunday](#) [get]
Gets the visibility state of the sunday TextBlock.
- Visibility [VisibleComment](#) [get]
Gets the visibility state of the comment.
- Visibility [VisibleEMail](#) [get]
Gets the visibility state of the email address.
- Visibility [VisiblePhone](#) [get]
Gets the visibility state of the phone number.
- Visibility [VisibleRoom](#) [get]
Gets the visibility state of the room.
- Visibility [VisibleBuilding](#) [get]
Gets the visibility state of the building.

5.69.1 Detailed Description

[Model](#) for menu

5.69.2 Constructor & Destructor Documentation

5.69.2.1 `CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.OpeninghoursInstitutionModel ()`

Initializes a new instance of the [OpeninghoursInstitutionModel](#) class.

5.69.3 Property Documentation

5.69.3.1 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Building` [get], [set]

Gets or sets the building where the institution is located.

5.69.3.2 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Comment` [get]

Gets the localized comment. if the phone is set to german language, the german comment will be returned otherwise the english comment.

5.69.3.3 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Comment_DE` [get], [set]

Gets or sets the german comment.

5.69.3.4 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Comment_EN` `[get]`, `[set]`

Gets or sets the english comment.

5.69.3.5 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.EMail` `[get]`, `[set]`

Gets or sets the email address of the institution.

5.69.3.6 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.EMailTitle` `[get]`

Gets a string containing the email address and the institution title separated by ':'.

5.69.3.7 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Friday` `[get]`, `[set]`

Gets or sets the open hours on friday.

5.69.3.8 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Monday` `[get]`, `[set]`

Gets or sets the open hours on monday.

5.69.3.9 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Phone` `[get]`, `[set]`

Gets or sets the phone number of the institution.

5.69.3.10 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.PhoneTitle` `[get]`

Gets a string containing the phone number and the institution title separated by ':'.

5.69.3.11 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Room` `[get]`, `[set]`

Gets or sets the room where the institution is located.

5.69.3.12 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Saturday` `[get]`, `[set]`

Gets or sets the open hours on saturday.

5.69.3.13 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Sunday` `[get]`, `[set]`

Gets or sets the open hours on sunday.

5.69.3.14 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Thursday` `[get]`, `[set]`

Gets or sets the open hours on thursday.

5.69.3.15 `string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Title` `[get]`

Gets the localized title. If the phone is set to german language, the german title will be returned otherwise the english title.

5.69.3.16 string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Title_DE [get], [set]

Gets or sets the german title of the institution.

5.69.3.17 string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Title_EN [get], [set]

Gets or sets the english title of the institution.

5.69.3.18 string CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Tuesday [get], [set]

Gets or sets the open hours on tuesday.

5.69.3.19 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleBuilding [get]

Gets the visibility state of the building.

5.69.3.20 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleComment [get]

Gets the visibility state of the comment.

5.69.3.21 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleEmail [get]

Gets the visibility state of the email address.

5.69.3.22 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleFriday [get]

Gets the visibility state of the friday TextBlock.

5.69.3.23 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleMonday [get]

Gets the visibility state of the monday TextBlock.

5.69.3.24 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisiblePhone [get]

Gets the visibility state of the phone number.

5.69.3.25 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleRoom [get]

Gets the visibility state of the room.

5.69.3.26 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleSaturday [get]

Gets the visibility state of the saturday TextBlock.

5.69.3.27 Visibility CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleSunday [get]

Gets the visibility state of the sunday TextBlock.

5.69.3.28 Visibility `CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleThursday` [get]

Gets the visibility state of the thursday TextBlock.

5.69.3.29 Visibility `CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleTuesday` [get]

Gets the visibility state of the tuesday TextBlock.

5.69.3.30 Visibility `CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.VisibleWednesday` [get]

Gets the visibility state of the wednesday TextBlock.

5.69.3.31 string `CampusAppWP8.Model.Openinghours.OpeninghoursInstitutionModel.Wednesday` [get], [set]

Gets or sets the open hours on wednesday.

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Openinghours/Openinghours-InstitutionModel.cs`

5.70 CampusAppWP8.Model.Openinghours.OpeninghoursModel Class Reference

[Model](#) for opening hours.

Public Member Functions

- [OpeninghoursModel](#) ()
Initializes a new instance of the [OpeninghoursModel](#) class.

Properties

- DateTime [CreateTime](#) [get]
Gets the creation time of the model.
- ObservableCollection
< [OpeninghoursInstitutionModel](#) > [Institutions](#) [get, set]
Gets or sets the Institutions.

5.70.1 Detailed Description

[Model](#) for opening hours.

5.70.2 Constructor & Destructor Documentation

5.70.2.1 `CampusAppWP8.Model.Openinghours.OpeninghoursModel.OpeninghoursModel ()`

Initializes a new instance of the [OpeninghoursModel](#) class.

5.70.3 Property Documentation

5.70.3.1 DateTime CampusAppWP8.Model.Openinghours.OpeninghoursModel.CreateTime [get]

Gets the creation time of the model.

5.70.3.2 ObservableCollection<OpeninghoursInstitutionModel> CampusAppWP8.Model.Openinghours.OpeninghoursModel.Institutions [get], [set]

Gets or sets the Institutions.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Openinghours/Openinghours-Model.cs

5.71 CampusAppWP8.Pages.Openinghours.OpeninghoursPage Class Reference

Opening hours page.

Inheritance diagram for CampusAppWP8.Pages.Openinghours.OpeninghoursPage:



Public Member Functions

- [OpeninghoursPage](#) ()
Initializes a new instance of the [OpeninghoursPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the [OnNavigatedTo](#) method.
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the [OnNavigatedFrom](#) method

5.71.1 Detailed Description

Opening hours page.

5.71.2 Constructor & Destructor Documentation

5.71.2.1 CampusAppWP8.Pages.Openinghours.OpeninghoursPage.OpeninghoursPage ()

Initializes a new instance of the [OpeninghoursPage](#) class.

5.71.3 Member Function Documentation

5.71.3.1 `override void CampusAppWP8.Pages.Openinghours.OpeninghoursPage.OnNavigatedFrom (NavigationEventArgs e)`
[protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

5.71.3.2 override void CampusAppWP8.Pages.Openinghours.OpeninghoursPage.OnNavigatedTo (NavigationEventArgs *e*) [protected]

Override the OnNavigatedTo method.

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Openinghours/Openinghours-Page.xaml.cs

5.72 CampusAppWP8.Utility.Lui.Button.PhoneButton Class Reference

This class create an [Button](#) which start a PhoneCall

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.PhoneButton:



Public Member Functions

- [PhoneButton](#) ()

Initializes a new instance of the [PhoneButton](#) class.

Static Public Attributes

- static readonly DependencyProperty [PhoneProperty](#) = DependencyProperty.Register("Number", typeof(object), typeof([PhoneButton](#)), new PropertyMetadata(false))

Register the PhoneProperty

- static readonly DependencyProperty [DisplayNameProperty](#) = DependencyProperty.Register("DisplayName", typeof(object), typeof([PhoneButton](#)), new PropertyMetadata(false))

Register the DisplayNameProperty

Protected Member Functions

- override void [OnClick](#) ()

Overrides the OnClick-Method from button

Properties

- object `Number` [get, set]
Gets or sets the PhoneNumber
- object `DisplayName` [get, set]
Gets or sets the DisplayName

5.72.1 Detailed Description

This class create an `Button` which start a PhoneCall

5.72.2 Constructor & Destructor Documentation

5.72.2.1 `CampusAppWP8.Utility.Lui.Button.PhoneButton.PhoneButton ()`

Initializes a new instance of the `PhoneButton` class.

5.72.3 Member Function Documentation

5.72.3.1 `override void CampusAppWP8.Utility.Lui.Button.PhoneButton.OnClick ()` [protected]

Overrides the OnClick-Method from button

now method start the PhoneTask

5.72.4 Member Data Documentation

5.72.4.1 `readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.PhoneButton.DisplayNameProperty = DependencyProperty.Register("DisplayName", typeof(object), typeof(PhoneButton), new PropertyMetadata(false))` [static]

Register the DisplayNameProperty

5.72.4.2 `readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.PhoneButton.PhoneProperty = DependencyProperty.Register("Number", typeof(object), typeof(PhoneButton), new PropertyMetadata(false))` [static]

Register the PhoneProperty

5.72.5 Property Documentation

5.72.5.1 `object CampusAppWP8.Utility.Lui.Button.PhoneButton.DisplayName` [get], [set]

Gets or sets the DisplayName

5.72.5.2 `object CampusAppWP8.Utility.Lui.Button.PhoneButton.Number` [get], [set]

Gets or sets the PhoneNumber

The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/PhoneButton.cs`

5.73 CampusAppWP8.Model.GeoDb.PlaceModel Class Reference

[Model](#) for a place of the SPSService

Properties

- string [PlaceId](#) [get, set]
Gets or sets the placeId
- string [ParentId](#) [get, set]
Gets or sets the id of the "parent" of a place
- string [RefPoint](#) [get, set]
Gets or sets the ReferencePoint of a place

5.73.1 Detailed Description

[Model](#) for a place of the SPSService

5.73.2 Property Documentation

5.73.2.1 string `CampusAppWP8.Model.GeoDb.PlaceModel.ParentId` [get], [set]

Gets or sets the id of the "parent" of a place

5.73.2.2 string `CampusAppWP8.Model.GeoDb.PlaceModel.PlaceId` [get], [set]

Gets or sets the placeId

5.73.2.3 string `CampusAppWP8.Model.GeoDb.PlaceModel.RefPoint` [get], [set]

Gets or sets the ReferencePoint of a place


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/GeoDb/Place-Model.cs

5.74 CampusAppWP8.Pages.Lecture.ResultDetailPage Class Reference

Class for the page which shows details of an activity

Inheritance diagram for `CampusAppWP8.Pages.Lecture.ResultDetailPage`:



Public Member Functions

- [ResultDetailPage](#) ()
Initializes a new instance of the [ResultDetailPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the [OnNavigatedTo](#) method

5.74.1 Detailed Description

Class for the page which shows details of an activity

5.74.2 Constructor & Destructor Documentation

5.74.2.1 CampusAppWP8.Pages.Lecture.ResultDetailPage.ResultDetailPage ()

Initializes a new instance of the [ResultDetailPage](#) class.

5.74.3 Member Function Documentation

5.74.3.1 override void CampusAppWP8.Pages.Lecture.ResultDetailPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the [OnNavigatedTo](#) method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Lecture/ResultDetailPage.xaml.cs

5.75 CampusAppWP8.Pages.Lecture.ResultPage Class Reference

Class for the page which shows the results of an LectureRequest

Inheritance diagram for CampusAppWP8.Pages.Lecture.ResultPage:



Public Member Functions

- [ResultPage](#) ()
Initializes a new instance of the [ResultPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the OnNavigatedTo method

5.75.1 Detailed Description

Class for the page which shows the results of an LectureRequest

5.75.2 Constructor & Destructor Documentation

5.75.2.1 CampusAppWP8.Pages.Lecture.ResultPage.ResultPage ()

Initializes a new instance of the [ResultPage](#) class.

5.75.3 Member Function Documentation

5.75.3.1 override void CampusAppWP8.Pages.Lecture.ResultPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the OnNavigatedTo method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Lecture/Result-Page.xaml.cs

5.76 CampusAppWP8.Model.Utility.RoleListPickerItemListModel Class Reference

Class for the RoleList

Inheritance diagram for CampusAppWP8.Model.Utility.RoleListPickerItemListModel:



Public Member Functions

- [RoleListPickerItemListModel](#) ()
Initializes a new instance of the [RoleListPickerItemListModel](#) class.

Protected Member Functions

- override void [LoadList](#) ()
Overrides the LoadList-Method [ListPickerItemListModel](#)

Additional Inherited Members

5.76.1 Detailed Description

Class for the RoleList

5.76.2 Constructor & Destructor Documentation

5.76.2.1 CampusAppWP8.Model.Utility.RoleListPickerItemListModel.RoleListPickerItemListModel ()

Initializes a new instance of the [RoleListPickerItemListModel](#) class.

5.76.3 Member Function Documentation

5.76.3.1 override void CampusAppWP8.Model.Utility.RoleListPickerItemListModel.LoadList () [protected], [virtual]

Overrides the LoadList-Method [ListPickerItemListModel](#)

Reimplemented from [CampusAppWP8.Model.Utility.ListPickerItemListModel](#).


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/RoleList-PickerItemListModel.cs

5.77 CampusAppWP8.Model.events_news.RSSChannelModel Class Reference

Channel [Model](#), which contains the rss feed item list.

Inheritance diagram for CampusAppWP8.Model.events_news.RSSChannelModel:



Public Member Functions

- [RSSChannelModel](#) ()
Default constructor.

Properties

- ObservableCollection< [RSSModel](#) > [item](#) [get, set]
RssFeed information item list.
- ObservableCollection< [RSSModel](#) > [Item](#) [get, set]
Set/Get the rss feed item list.

5.77.1 Detailed Description

Channel [Model](#), which contains the rss feed item list.

5.77.2 Constructor & Destructor Documentation

5.77.2.1 CampusAppWP8.Model.events_news.RSSChannelModel.RSSChannelModel ()

Default constructor.

5.77.3 Property Documentation

5.77.3.1 ObservableCollection<RSSModel> CampusAppWP8.Model.events_news.RSSChannelModel.item [get], [set]

RssFeed information item list.

5.77.3.2 ObservableCollection<RSSModel> CampusAppWP8.Model.events_news.RSSChannelModel.Item [get], [set]

Set/Get the rss feed item list.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Events/RSSChannel-Model.cs

5.78 CampusAppWP8.Model.RSS.RSSChannelModel Class Reference

Channel [Model](#), which contains the [RSS](#) feed item list.

Public Member Functions

- [RSSChannelModel](#) ()
Initializes a new instance of the [RSSChannelModel](#) class.

Properties

- ObservableCollection< [RSSModel](#) > [Item](#) [get, set]
Gets or sets the [RSS](#) feed item list.

5.78.1 Detailed Description

Channel [Model](#), which contains the [RSS](#) feed item list.

5.78.2 Constructor & Destructor Documentation

5.78.2.1 CampusAppWP8.Model.RSS.RSSChannelModel.RSSChannelModel ()

Initializes a new instance of the [RSSChannelModel](#) class.

5.78.3 Property Documentation

5.78.3.1 ObservableCollection<RSSModel> CampusAppWP8.Model.RSS.RSSChannelModel.Item [get], [set]

Gets or sets the [RSS](#) feed item list.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/RSS/RSSChannel-Model.cs

5.79 CampusAppWP8.Model.RSS.RSSModel Class Reference

Contains the [RSS](#) feed information.

Static Public Member Functions

- static int [CompareTimeStamp](#) ([RSSModel](#) item1, [RSSModel](#) item2)
Comparing function for DateTime timestamps. (currently unused)

Properties

- string [Title](#) [get, set]
Gets or sets the title of the feed.
- string [Text](#) [get, set]
Gets or sets the text of the feed.
- string [Timestamp](#) [get, set]
Gets or sets the timestamp of the feed as string.
- DateTime [DTTimestamp](#) [get, set]
Gets or sets the timestamp of the feed as DateTime object.
- string [Date](#) [get]
Gets the date of the timestamp as string. example: Mon, 25.06.2013.
- string [Time](#) [get]
Gets the time of the timestamp as string. example: 12:56 Uhr.
- string [Link](#) [get, set]
Gets or sets the link/url of the feed.
- int [Index](#) [get, set]
Gets or sets the ListIndex.

5.79.1 Detailed Description

Contains the [RSS](#) feed information.

5.79.2 Member Function Documentation

5.79.2.1 static int CampusAppWP8.Model.RSS.RSSModel.CompareTimeStamp ([RSSModel](#) item1, [RSSModel](#) item2) [static]

Comparing function for DateTime timestamps. (currently unused)

Parameters

<i>item1</i>	first item
<i>item2</i>	second item

Returns

-1 if item2 is older then item1, otherwise 0

5.79.3 Property Documentation

5.79.3.1 `string CampusAppWP8.Model.RSS.RSSModel.Date` [get]

Gets the date of the timestamp as string. example: Mon, 25.06.2013.

5.79.3.2 `DateTime CampusAppWP8.Model.RSS.RSSModel.DTTimestamp` [get], [set]

Gets or sets the timestamp of the feed as DateTime object.

5.79.3.3 `int CampusAppWP8.Model.RSS.RSSModel.Index` [get], [set]

Gets or sets the ListIndex.

5.79.3.4 `string CampusAppWP8.Model.RSS.RSSModel.Link` [get], [set]

Gets or sets the link/url of the feed.

5.79.3.5 `string CampusAppWP8.Model.RSS.RSSModel.Text` [get], [set]

Gets or sets the text of the feed.

5.79.3.6 `string CampusAppWP8.Model.RSS.RSSModel.Time` [get]

Gets the time of the timestamp as string. example: 12:56 Uhr.

5.79.3.7 `string CampusAppWP8.Model.RSS.RSSModel.Timestamp` [get], [set]

Gets or sets the timestamp of the feed as string.

5.79.3.8 `string CampusAppWP8.Model.RSS.RSSModel.Title` [get], [set]

Gets or sets the title of the feed.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/RSS/RSSModel.cs

5.80 CampusAppWP8.Model.events_news.RSSModel Class Reference

Contains the rss feed informations.

Inheritance diagram for CampusAppWP8.Model.events_news.RSSModel:



Static Public Member Functions

- static int [CompareTimeStamp](#) (RSSModel item1, RSSModel item2)
Comparing function for Datetime-Timestamps. (currently unused)

Properties

- string [Title](#) [get, set]
Set/Get the title of the feed.
- string [Text](#) [get, set]
Set/Get the text of the feed.
- string [Timestamp](#) [get, set]
Set/Get the timestamp of the feed as string.
- DateTime [DTTimestamp](#) [get, set]
Set/Get the timestamp of the feed as DateTime object.
- string [Date](#) [get]
Return the date of the timestamp as string. example: Mon, 25.06.2013.
- string [Time](#) [get]
Return the time of the timestamp as string. example: 12:56 Uhr.
- int [Index](#) [get, set]
Gets or sets the ListIndex
- string [Link](#) [get, set]
Set/Get the link/url of the feed.

5.80.1 Detailed Description

Contains the rss feed informations.

5.80.2 Member Function Documentation

5.80.2.1 static int CampusAppWP8.Model.events_news.RSSModel.CompareTimeStamp (RSSModel *item1*, RSSModel *item2*) [static]

Comparing function for Datetime-Timestamps. (currently unused)

Parameters

<i>item1</i>	first item
<i>item2</i>	secound item

Returns

5.80.3 Property Documentation

5.80.3.1 `string CampusAppWP8.Model.events_news.RSSModel.Date` [get]

Return the date of the timestamp as string. example: Mon, 25.06.2013.

5.80.3.2 `DateTime CampusAppWP8.Model.events_news.RSSModel.DTTimestamp` [get], [set]

Set/Get the timestamp of the feed as DateTime object.

5.80.3.3 `int CampusAppWP8.Model.events_news.RSSModel.Index` [get], [set]

Gets or sets the ListIndex

5.80.3.4 `string CampusAppWP8.Model.events_news.RSSModel.Link` [get], [set]

Set/Get the link/url of the feed.

5.80.3.5 `string CampusAppWP8.Model.events_news.RSSModel.Text` [get], [set]

Set/Get the text of the feed.

5.80.3.6 `string CampusAppWP8.Model.events_news.RSSModel.Time` [get]

Return the time of the timestamp as string. example: 12:56 Uhr.

5.80.3.7 `string CampusAppWP8.Model.events_news.RSSModel.Timestamp` [get], [set]

Set/Get the timestamp of the feed as string.

5.80.3.8 `string CampusAppWP8.Model.events_news.RSSModel.Title` [get], [set]

Set/Get the title of the feed.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Events/RSSModel.-cs

5.81 CampusAppWP8.Model.RSS.RSSViewModel Class Reference

ViewModel of the [RSS](#) feed, containing the feed/channel object.

Public Member Functions

- [RSSViewModel](#) ()

Initializes a new instance of the [RSSViewModel](#) class.

Properties

- `ObservableCollection`
`< RSSChannelModel > Channel` [get, set]
Gets or sets the channel list.
- `DateTime` `CreateTime` [get]
Gets the creation time.

5.81.1 Detailed Description

ViewModel of the [RSS](#) feed, containing the feed/channel object.

5.81.2 Constructor & Destructor Documentation

5.81.2.1 `CampusAppWP8.Model.RSS.RSSViewModel.RSSViewModel ()`

Initializes a new instance of the [RSSViewModel](#) class.

5.81.3 Property Documentation

5.81.3.1 `ObservableCollection<RSSChannelModel> CampusAppWP8.Model.RSS.RSSViewModel.Channel` [get], [set]

Gets or sets the channel list.

5.81.3.2 `DateTime CampusAppWP8.Model.RSS.RSSViewModel.CreateTime` [get]

Gets the creation time.


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/RSS/RSSView-Model.cs`

5.82 `CampusAppWP8.Model.Utility.SemesterListPickerItemListModel` Class Reference

Class for the SemesterList

Inheritance diagram for `CampusAppWP8.Model.Utility.SemesterListPickerItemListModel`:



Public Member Functions

- `SemesterListPickerItemListModel ()`
Initializes a new instance of the [SemesterListPickerItemListModel](#) class.

Protected Member Functions

- override void [LoadList](#) ()
Overrides the LoadList-Method [ListPickerItemListModel](#)

Additional Inherited Members

5.82.1 Detailed Description

Class for the SemesterList

5.82.2 Constructor & Destructor Documentation

5.82.2.1 CampusAppWP8.Model.Utility.SemesterListPickerItemListModel.SemesterListPickerItemListModel ()

Initializes a new instance of the [SemesterListPickerItemListModel](#) class.

5.82.3 Member Function Documentation

5.82.3.1 override void CampusAppWP8.Model.Utility.SemesterListPickerItemListModel.LoadList () [protected], [virtual]

Overrides the LoadList-Method [ListPickerItemListModel](#)

Reimplemented from [CampusAppWP8.Model.Utility.ListPickerItemListModel](#).


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/SemesterList-PickerItemListModel.cs

5.83 CampusAppWP8.Feed.GeoApi.SpsApi Class Reference

Class for SPSAPI

Inheritance diagram for CampusAppWP8.Feed.GeoApi.SpsApi:

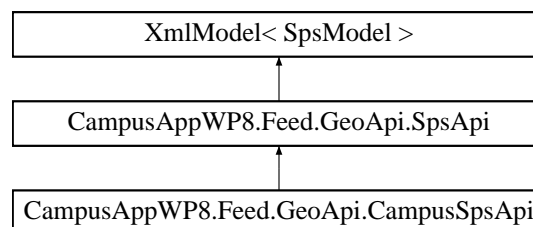

Public Member Functions

- [SpsApi](#) ()
Initializes a new instance of the [SpsApi](#) class.
- void [SetupPlaceRequest](#) (string lat, string log, string domain=null)
Method set the UriParameter of a placeRequest for a given latitude and longitude

5.83.1 Detailed Description

Class for SPSAPI

5.83.2 Constructor & Destructor Documentation

5.83.2.1 CampusAppWP8.Feed.GeoApi.SpsApi.SpsApi ()

Initializes a new instance of the [SpsApi](#) class.

5.83.3 Member Function Documentation

5.83.3.1 void CampusAppWP8.Feed.GeoApi.SpsApi.SetupPlaceRequest (string *lat*, string *log*, string *domian* = null)

Method set the UriParameter of a placeRequest for a given latitude and longitude

Parameters

<i>lat</i>	latitude of the place
<i>log</i>	longitude of the place
<i>domian</i>	request domain

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Api/GeoApi/SpsApi.cs

5.84 CampusAppWP8.Model.GeoDb.SpsModel Class Reference

[Model](#) for a xml-response of the SPSService

Properties

- `ObservableCollection< PlaceModel > Places` [get, set]
Gets or sets a list of places

5.84.1 Detailed Description

[Model](#) for a xml-response of the SPSService

5.84.2 Property Documentation

5.84.2.1 `ObservableCollection<PlaceModel> CampusAppWP8.Model.GeoDb.SpsModel.Places` [get], [set]

Gets or sets a list of places


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/GeoDb/SpsModel.cs

5.85 CampusAppWP8.Pages.StartPage Class Reference

Class for the [StartPage](#)

Inheritance diagram for CampusAppWP8.Pages.StartPage:



Public Member Functions

- [StartPage](#) ()
Initializes a new instance of the [StartPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Methods overrides the OnNavigatedTo-Method

5.85.1 Detailed Description

Class for the [StartPage](#)

5.85.2 Constructor & Destructor Documentation

5.85.2.1 CampusAppWP8.Pages.StartPage.StartPage ()

Initializes a new instance of the [StartPage](#) class.

5.85.3 Member Function Documentation

5.85.3.1 override void CampusAppWP8.Pages.StartPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Methods overrides the OnNavigatedTo-Method

Parameters

<i>e</i>	some NavigationEventArgs
----------	--------------------------


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/StartPage.xaml.cs

5.86 CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed Class Reference

This Class is for [StudentCouncilFeed](#)

Inheritance diagram for CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed:



Public Member Functions

- [StudentCouncilFeed](#) ()
Initializes a new instance of the [StudentCouncilFeed](#) class.

5.86.1 Detailed Description

This Class is for [StudentCouncilFeed](#)

5.86.2 Constructor & Destructor Documentation

5.86.2.1 CampusAppWP8.Feed.StudentCouncil.StudentCouncilFeed.StudentCouncilFeed ()

Initializes a new instance of the [StudentCouncilFeed](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Feed/StudentCouncil/Student-CouncilFeed.cs

5.87 CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel Class Reference

[Model](#) for menus in one week

Public Member Functions

- [StudentCouncilListModel](#) ()
Initializes a new instance of the [StudentCouncilListModel](#) class.
- Dictionary< string, List
< [StudentCouncilModel](#) > > [GetStudentCouncilsGroupByFaculty](#) ()
Method group the [StudentCouncilList](#) by Faculty

Properties

- ObservableCollection
< [StudentCouncilModel](#) > [StudentCouncils](#) [get, set]
Gets or sets the [StudentCouncils](#)
- DateTime [CreateTime](#) [get]
Gets the creation time of the model

5.87.1 Detailed Description

[Model](#) for menus in one week

5.87.2 Constructor & Destructor Documentation

5.87.2.1 CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel.StudentCouncilListModel ()

Initializes a new instance of the [StudentCouncilListModel](#) class.

5.87.3 Member Function Documentation

5.87.3.1 Dictionary<string, List<StudentCouncilModel>> CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel.GetStudentCouncilsGroupByFaculty ()

Method group the StudentCouncilList by Faculty

Returns

a Dictionary, where the Key is name of the Faculty und the value is a List of [StudentCouncil](#)

5.87.4 Property Documentation

5.87.4.1 DateTime CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel.CreateTime [get]

Gets the creation time of the model

5.87.4.2 ObservableCollection<StudentCouncilModel> CampusAppWP8.Model.StudentCouncil.StudentCouncilListModel.StudentCouncils [get], [set]

Gets or sets the StudentCouncils

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/StudentCouncil/StudentCouncilListModel.cs

5.88 CampusAppWP8.Model.StudentCouncil.StudentCouncilModel Class Reference

[Model](#) for menu

Public Member Functions

- [StudentCouncilModel](#) ()
Initializes a new instance of the [StudentCouncilModel](#) class.

Properties

- string [Faculty](#) [get, set]
Gets or sets the faculty of the [StudentCouncil](#).
- string [Name](#) [get, set]
Gets or sets the name of the [StudentCouncil](#).
- string [Url](#) [get, set]
Gets or sets the webpage-url of the [StudentCouncil](#).
- string [Email](#) [get, set]
Gets or sets the email-address of the [StudentCouncil](#).

5.88.1 Detailed Description

[Model](#) for menu

5.88.2 Constructor & Destructor Documentation

5.88.2.1 `CampusAppWP8.Model.StudentCouncil.StudentCouncilModel.StudentCouncilModel ()`

Initializes a new instance of the [StudentCouncilModel](#) class.

5.88.3 Property Documentation

5.88.3.1 `string CampusAppWP8.Model.StudentCouncil.StudentCouncilModel.Email [get], [set]`

Gets or sets the email-address of the [StudentCouncil](#).

5.88.3.2 `string CampusAppWP8.Model.StudentCouncil.StudentCouncilModel.Faculty [get], [set]`

Gets or sets the faculty of the [StudentCouncil](#).

5.88.3.3 `string CampusAppWP8.Model.StudentCouncil.StudentCouncilModel.Name [get], [set]`

Gets or sets the name of the [StudentCouncil](#).

5.88.3.4 `string CampusAppWP8.Model.StudentCouncil.StudentCouncilModel.Url [get], [set]`

Gets or sets the webpage-url of the [StudentCouncil](#).


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/StudentCouncil/Student-CouncilModel.cs

5.89 CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage Class Reference

Class for the [StudentCouncilPage](#)

Inheritance diagram for `CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage`:



Public Member Functions

- [StudentCouncilPage \(\)](#)

Initializes a new instance of the [StudentCouncilPage](#) class.

Protected Member Functions

- override void [OnNavigatedTo](#) (NavigationEventArgs e)
Override the OnNavigatedTo method
- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom method

5.89.1 Detailed Description

Class for the [StudentCouncilPage](#)

5.89.2 Constructor & Destructor Documentation

5.89.2.1 CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage.StudentCouncilPage ()

Initializes a new instance of the [StudentCouncilPage](#) class.

5.89.3 Member Function Documentation

5.89.3.1 override void CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

5.89.3.2 override void CampusAppWP8.Pages.StudentCouncil.StudentCouncilPage.OnNavigatedTo (NavigationEventArgs e) [protected]

Override the OnNavigatedTo method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/StudentCouncil/Student-CouncilPage.xaml.cs

5.90 CampusAppWP8.ThemelizedIcons Class Reference

Theme icons.

Properties

- [Icons ThemelizedIcon](#) [get]
Gets the resource object.

5.90.1 Detailed Description

Theme icons.

5.90.2 Property Documentation

5.90.2.1 Icons `CampusAppWP8.ThemelizedIcons.ThemelizedIcon` [get]

Gets the resource object.


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/ThemelizedIcons.cs`

5.91 CampusAppWP8.Utility.Lui.Button.ToggleButton Class Reference

This class create an [Button](#) which can toggle the Visibility of certain FrameworkElements

Inheritance diagram for `CampusAppWP8.Utility.Lui.Button.ToggleButton`:



Public Member Functions

- [ToggleButton](#) ()
Initializes a new instance of the [ToggleButton](#) class.
- void [ToggleToggleContent](#) ()
Method close the [ToggleContent](#) of the old [ToggleContent](#) and then show the new one
- void [ShowToggleContent](#) ()
Method show all Element of the [ToggleContent](#)
- void [HideToggleContent](#) ()
Method show all Element of the [ToggleContent](#)

Static Public Attributes

- static readonly DependencyProperty [ToggleContentTagProperty](#) = DependencyProperty.Register("ToggleContentTag", typeof(object), typeof([ToggleButton](#)), new PropertyMetadata(false))
Register the [ToggleContentTag](#)

Protected Member Functions

- override void [OnClick](#) ()
Overrides the [OnClick](#)-Method from [button](#)

Properties

- object [ToggleContentTag](#) [get, set]
Gets or sets the [ToggleContentTag](#)

5.91.1 Detailed Description

This class create an [Button](#) which can toggle the Visibility of certain FrameworkElements

5.91.2 Constructor & Destructor Documentation

5.91.2.1 `CampusAppWP8.Utility.Lui.Button.ToggleButton.ToggleButton ()`

Initializes a new instance of the [ToggleButton](#) class.

5.91.3 Member Function Documentation

5.91.3.1 `void CampusAppWP8.Utility.Lui.Button.ToggleButton.HideToggleContent ()`

Method show all Element of the ToggleContent

5.91.3.2 `override void CampusAppWP8.Utility.Lui.Button.ToggleButton.OnClick ()` [protected]

Overrides the OnClick-Method from button

now method toggle the visibility of some FrameWorkElements

5.91.3.3 `void CampusAppWP8.Utility.Lui.Button.ToggleButton.ShowToggleContent ()`

Method show all Element of the ToggleContent

5.91.3.4 `void CampusAppWP8.Utility.Lui.Button.ToggleButton.ToggleToggleContent ()`

Method close the ToggleContent of the old ToggleContent and then show the new one

5.91.4 Member Data Documentation

5.91.4.1 `readonly DependencyProperty CampusAppWP8.Utility.Lui.Button.ToggleButton.ToggleContentTagProperty = DependencyProperty.Register("ToggleContentTag", typeof(object), typeof(ToggleButton), new PropertyMetadata(false))` [static]

Register the ToggleContentTag

5.91.5 Property Documentation

5.91.5.1 `object CampusAppWP8.Utility.Lui.Button.ToggleButton.ToggleContentTag` [get], [set]

Gets or sets the ToggleContentTag


The documentation for this class was generated from the following file:

- `C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/Toggle-Button.cs`

5.92 CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar Class Reference

This class create an [Button](#) which start the Email-Client

Inheritance diagram for CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar:



Public Member Functions

- [UpdateButtonAppBar](#) ()
Initializes a new instance of the [UpdateButtonAppBar](#) class.

5.92.1 Detailed Description

This class create an [Button](#) which start the Email-Client

5.92.2 Constructor & Destructor Documentation

5.92.2.1 CampusAppWP8.Utility.Lui.Button.UpdateButtonAppBar.UpdateButtonAppBar ()

Initializes a new instance of the [UpdateButtonAppBar](#) class.


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/Lui/Button/Update-ButtonAppBar.cs

5.93 CampusAppWP8.Model.Utility.UrlParamModel Class Reference

This class is a [Model](#) for the URLParameter like GET-Parameter

Inheritance diagram for CampusAppWP8.Model.Utility.UrlParamModel:



Public Member Functions

- [UrlParamModel](#) (string [key](#))
Initializes a new instance of the [UrlParamModel](#) class.
- [UrlParamModel](#) (string [key](#), string [value](#))
Initializes a new instance of the [UrlParamModel](#) class.
- virtual bool [IsParamValid](#) ()

Method check if the parameter is valid

- override string [ToString](#) ()

Method return a formatted string like Key=Value

Protected Attributes

- readonly string [key](#)

Variable of the key

Properties

- string [Value](#) [get, set]

Gets or sets the value of the Parameter

- string [Key](#) [get]

Gets the key of the parameter

- virtual string [ParamToken](#) [get]

Gets the token, which indicate that the parameterList started

5.93.1 Detailed Description

This class is a [Model](#) for the URLParameter like GET-Parameter

5.93.2 Constructor & Destructor Documentation

5.93.2.1 CampusAppWP8.Model.Utility.UrlParamModel.UrlParamModel (string key)

Initializes a new instance of the [UrlParamModel](#) class.

Parameters

<i>key</i>	the key for the parameter
------------	---------------------------

5.93.2.2 CampusAppWP8.Model.Utility.UrlParamModel.UrlParamModel (string key, string value)

Initializes a new instance of the [UrlParamModel](#) class.

Parameters

<i>key</i>	the key for the parameter
------------	---------------------------

>

Parameters

<i>value</i>	value of the parameter
--------------	------------------------

5.93.3 Member Function Documentation

5.93.3.1 virtual bool CampusAppWP8.Model.Utility.UrlParamModel.IsParamValid () [virtual]

Method check if the parameter is valid

Returns

true if is it valid, otherwise false

5.93.3.2 override string CampusAppWP8.Model.Utility.UriParamModel.ToString ()

Method return a formatted string like Key=Value

Returns

return formatted string

5.93.4 Member Data Documentation

5.93.4.1 readonly string CampusAppWP8.Model.Utility.UriParamModel.key [protected]

Variable of the key

5.93.5 Property Documentation

5.93.5.1 string CampusAppWP8.Model.Utility.UriParamModel.Key [get]

Gets the key of the parameter

5.93.5.2 virtual string CampusAppWP8.Model.Utility.UriParamModel.ParamToken [get]

Gets the token, which indicate that the parameterList started

5.93.5.3 string CampusAppWP8.Model.Utility.UriParamModel.Value [get],[set]

Gets or sets the value of the Parameter


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Utility/URLParam-Model.cs

5.94 CampusAppWP8.Pages.Setting.UserProfil Class Reference

Class for the UserProfilePage

Inheritance diagram for CampusAppWP8.Pages.Setting.UserProfil:



Public Member Functions

- [UserProfil \(\)](#)

Initializes a new instance of the [UserProfil](#) class.

Protected Member Functions

- override void [OnNavigatedFrom](#) (NavigationEventArgs e)
Override the OnNavigatedFrom method

5.94.1 Detailed Description

Class for the UserProfilePage

5.94.2 Constructor & Destructor Documentation

5.94.2.1 CampusAppWP8.Pages.Setting.UserProfil.UserProfil ()

Initializes a new instance of the [UserProfil](#) class.

5.94.3 Member Function Documentation

5.94.3.1 override void CampusAppWP8.Pages.Setting.UserProfil.OnNavigatedFrom (NavigationEventArgs e) [protected]

Override the OnNavigatedFrom method

Parameters

<i>e</i>	Arguments of navigation
----------	-------------------------

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Setting/UserProfil.-xaml.cs

5.95 CampusAppWP8.Model.Setting.UserProfilModel Class Reference

[Model](#) for the profile of an user

Public Types

- enum [DegreeType](#) { [DegreeType.BACHELOR](#) = 82, [DegreeType.MASTER](#) = 88, [DegreeType.DIPLOM](#) = 11 }
Specifies the degrees.
- enum [RoleType](#) { [RoleType.STUDENT](#) = 1, [RoleType.STAFF](#) = 2 }
Specifies the role of the user.
- enum [Campus](#) { [Campus.CB_MAIN](#) = 1, [Campus.CB_NORTH](#) = 4, [Campus.CB_SOUTH](#) = 2, [Campus.SFB-_MAIN](#) = 3 }
Specifies the campus of the user.

Properties

- int [Course](#) [get, set]
Gets or sets the course of the user
- [Campus](#) [DefaultCampus](#) [get, set]
Gets or sets the defaultCampus of the user

- [RoleType Role](#) [get, set]
Gets or sets the role of the user
- [DegreeType Degree](#) [get, set]
Gets or sets the degree of the user
- int [Semester](#) [get, set]
Gets or sets the semester of the user

5.95.1 Detailed Description

[Model](#) for the profile of an user

5.95.2 Member Enumeration Documentation

5.95.2.1 enum `CampusAppWP8.Model.Setting.UserProfilModel.Campus`

Specifies the campus of the user.

Enumerator

- CB_MAIN*** Cottbus -> MainCampus
- CB_NORTH*** Cottbus -> NorthCampus
- CB_SOUTH*** Cottbus -> SouthCampus
- SFB_MAIN*** Senftenberg -> MainCampus

5.95.2.2 enum `CampusAppWP8.Model.Setting.UserProfilModel.DegreeType`

Specifies the degrees.

Enumerator

- BACHELOR*** bachelor degree
- MASTER*** master degree
- DIPLOM*** diploma degree

5.95.2.3 enum `CampusAppWP8.Model.Setting.UserProfilModel.RoleType`

Specifies the role of the user.

Enumerator

- STUDENT*** for students (01).
- STAFF*** for staffs (10).

5.95.3 Property Documentation

5.95.3.1 int `CampusAppWP8.Model.Setting.UserProfilModel.Course` [get], [set]

Gets or sets the course of the user

5.95.3.2 CampusAppWP8.Model.Setting.UserProfilModel.DefaultCampus [get], [set]

Gets or sets the defaultCampus of the user

5.95.3.3 DegreeType CampusAppWP8.Model.Setting.UserProfilModel.Degree [get], [set]

Gets or sets the degree of the user

5.95.3.4 RoleType CampusAppWP8.Model.Setting.UserProfilModel.Role [get], [set]

Gets or sets the role of the user

5.95.3.5 int CampusAppWP8.Model.Setting.UserProfilModel.Semester [get], [set]

Gets or sets the semester of the user


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/Setting/UserProfil-Model.cs

5.96 CampusAppWP8.Pages.Webmail.WebmailPage Class Reference

Class for the [WebmailPage](#)

Inheritance diagram for CampusAppWP8.Pages.Webmail.WebmailPage:



Public Member Functions

- [WebmailPage](#) ()
Initializes a new instance of the [WebmailPage](#) class.

5.96.1 Detailed Description

Class for the [WebmailPage](#)

5.96.2 Constructor & Destructor Documentation

5.96.2.1 CampusAppWP8.Pages.Webmail.WebmailPage.WebmailPage ()

Initializes a new instance of the [WebmailPage](#) class.

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Pages/Webmail/Webmail-Page.xaml.cs

5.97 CampusAppWP8.Utility.XmlManager Class Reference

Class provides some Xml-methods

Static Public Member Functions

- static T [DeserializationToModel](#)< T > (string xmlString, string validRootName)
Method deserialization a string to a [Model](#)
- static string [SerializationToString](#)< T > (T model)
Method serializes a model to a string.

5.97.1 Detailed Description

Class provides some Xml-methods

5.97.2 Member Function Documentation

5.97.2.1 `static T CampusAppWP8.Utility.XmlManager.DeserializationToModel< T > (string xmlString, string validRootName)` [static]

Method deserialization a string to a [Model](#)

Template Parameters

<i>T</i>	the model
----------	-----------

Parameters

<i>xmlString</i>	the XmlString
<i>validRootName</i>	name of the RootTag

Returns

return the deserialization of the model

5.97.2.2 `static string CampusAppWP8.Utility.XmlManager.SerializationToString< T > (T model)` [static]

Method serializes a model to a string.

Template Parameters

<i>T</i>	type of the model
----------	-------------------

Parameters

<i>model</i>	model object
--------------	--------------

Returns

serialized string


The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Utility/XmlManager.cs

5.98 CampusAppWP8.Model.XmlModel< T > Class Template Reference

Xml model io handler class.

Inheritance diagram for CampusAppWP8.Model.XmlModel< T >:

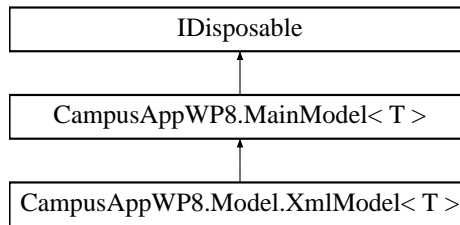

Public Member Functions

- [XmlModel](#) ([ModelType](#) modelType, string fileName, string url)
Initializes a new instance of the XmlModel{T} class.
- [XmlModel](#) ([ModelType](#) modelType, string sourceName)
Initializes a new instance of the XmlModel{T} class. Use only if the model io type is file or feed, not both.

Protected Member Functions

- override bool [DeserializeModel](#) (byte[] modelData)
Create the model from a xml byte array.
- override byte[] [SerializeModel](#) ()
Serializes the model to a byte array.

Properties

- string [ValidRootName](#) [get, set]
Gets or sets for the name of the root-tag

Additional Inherited Members

5.98.1 Detailed Description

Xml model io handler class.

Template Parameters

<i>T</i>	model type
----------	------------

5.98.2 Constructor & Destructor Documentation

5.98.2.1 CampusAppWP8.Model.XmlModel< T >.XmlModel ([ModelType](#) modelType, string fileName, string url)

Initializes a new instance of the XmlModel{T} class.

Parameters

<i>modelType</i>	model io type
<i>fileName</i>	filename of the data file
<i>url</i>	url of the feed data

5.98.2.2 CampusAppWP8.Model.XmlModel< T >.XmlModel (*ModelType* *modelType*, string *sourceName*)

Initializes a new instance of the XmlModel{T} class. Use only if the model io type is file or feed, not both.

Parameters

<i>modelType</i>	model io type
<i>sourceName</i>	name of the file or the url of the feed

5.98.3 Member Function Documentation

5.98.3.1 override bool CampusAppWP8.Model.XmlModel< T >.DeserializeModel (byte[] *modelData*) [protected], [virtual]

Create the model from a xml byte array.

Parameters

<i>modelData</i>	model data
------------------	------------

Returns

true, if succeeded

Implements [CampusAppWP8.MainModel< T >](#).

5.98.3.2 override byte [] CampusAppWP8.Model.XmlModel< T >.SerializeModel () [protected], [virtual]

Serializes the model to a byte array.

Returns

model data

Implements [CampusAppWP8.MainModel< T >](#).

5.98.4 Property Documentation

5.98.4.1 string CampusAppWP8.Model.XmlModel< T >.ValidRootName [get], [set], [protected]

Gets or sets for the name of the root-tag

The documentation for this class was generated from the following file:

- C:/Users/stubbfel/gitrepos/CampusAppWP8/CampusAppWP8/CampusAppWP8/Model/XmlModel.cs